

EC centrifugal module

backward curved, single inlet

with support plate

K3G630-AB06-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142



Nominal data

Type	K3G630-AB06-15	
Motor	M3G150-IF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
Speed	min ⁻¹	1200
Power input	W	2800
Current draw	A	4.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}		57.9	52.2	56.2
Efficiency grade N		63.7	58	62
Power input P_{ed}	kW	2.81		
Air flow q_v	m ³ /h	10005		
Pressure increase p_{fs}	Pa	555		
Speed n	min ⁻¹	1210		

Data established at point of optimum efficiency




Technical features

Mass	50 kg
Size	630 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	Aluminium sheet
Material of mounting plate	Sheet steel, hot-dip galvanised
Material of distancing profiles	Aluminium
Material of inlet nozzle	Sheet steel, hot-dip galvanised
Number of blades	6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - PFC, passive - Control input 0-10 VDC / PWM - Over-temperature protected electronics / motor - Alarm relay - Integrated PID controller - Input for sensor 0-10 V or 4-20 mA - RS485 ebmBUS - Motor current limit - Soft start - Line undervoltage / phase failure detection
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	With plug
Motor protection	Reverse polarity and locked-rotor protection
Cable exit	Lateral
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	CE
Approval	UL; CSA; VDE

EC centrifugal module

backward curved, single inlet
with support plate

Product drawing

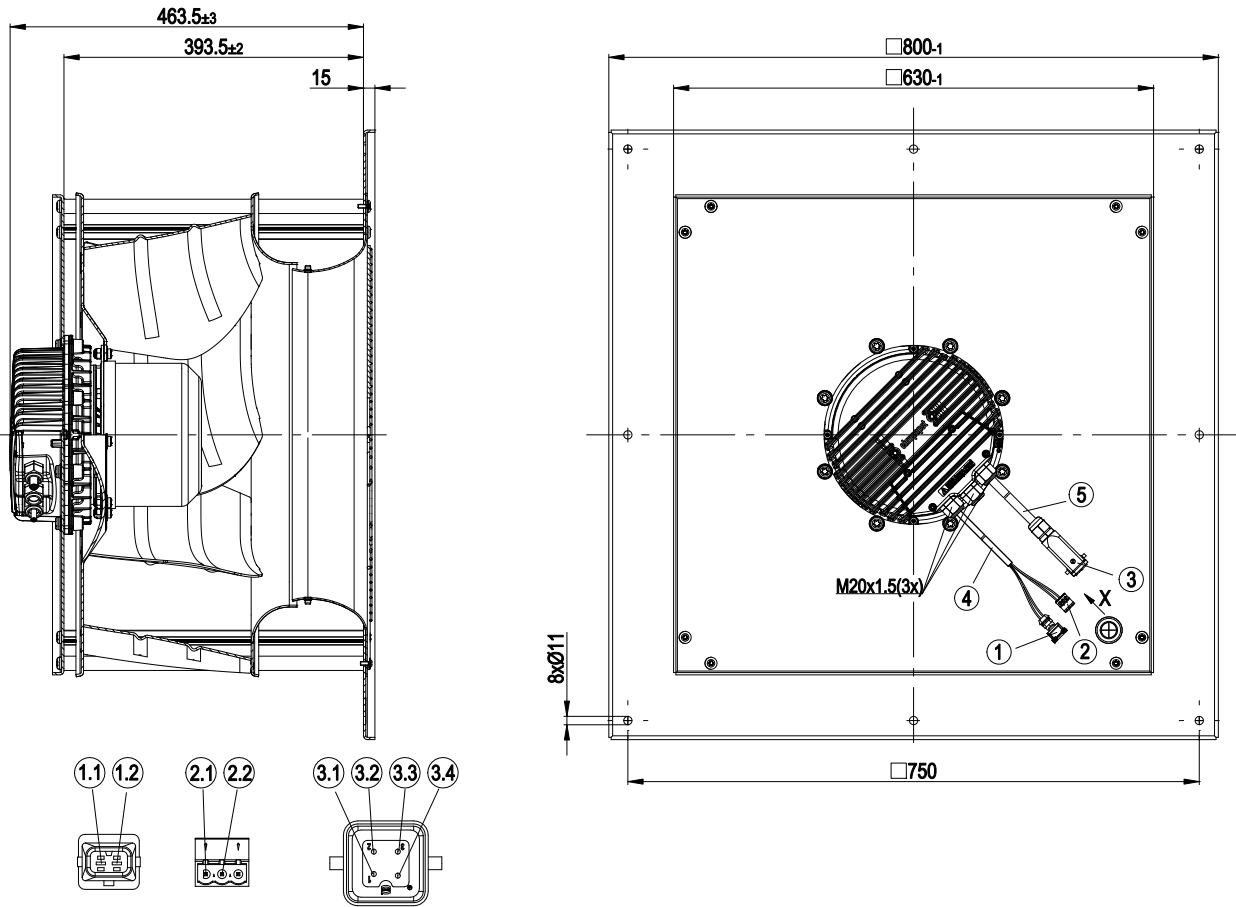

X	View X
1	Plug AMP Timer-connector 2 pole. Order no. 106.462-1, with 2 AMP Junior-Timer contacts, Order no. 1-963.748-1
1.1	black 3
1.2	black 4
2	Plug Phoenix Contact IC 2,5/ 3-ST-5,08 Order no. 1786187
2.1	black 1
2.2	black 2
3	Connector housing Harting, Order no. 09 20 003 2611 and connector housing Harting, Order no. 09 20 003 0420
3.1	black 1
3.2	black 2
3.3	black 3
3.4	PE
4	Connection line Oelflex 150 quattro 5G0.5
5	Connection line Oelflex 150 quattro 4G2.5




EC centrifugal module

backward curved, single inlet
with support plate

Connection screen


Customer circuit

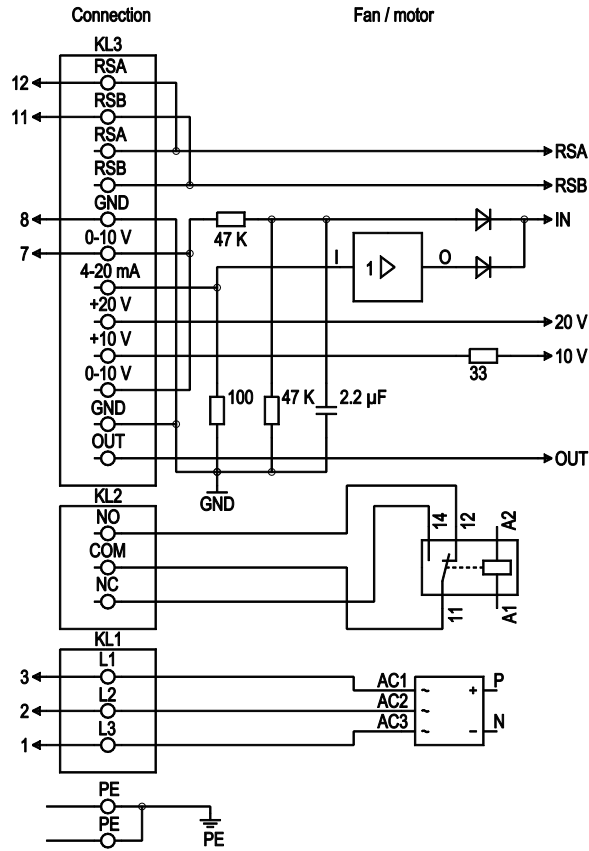

Line	No.	Signal	Colour	Function / assignment
1		PE	green/yellow	Protective earth connection
1	1	L3	black 3	Supply voltage, 50/60 Hz
1	2	L2	black 2	Supply voltage, 50/60 Hz
1	3	L1	black 1	Supply voltage, 50/60 Hz
2	7	0 - 10 V	black 4	Use control / actual value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
2	8	GND	black 3	Reference mass for control interface, SELV
2	11	RSB	black 2	RS485 interface for ebmBUS, RSB, SELV
2	12	RSA	black 1	RS485 interface for ebmBus, RSA, SELV



Charts: Air flow 50 Hz

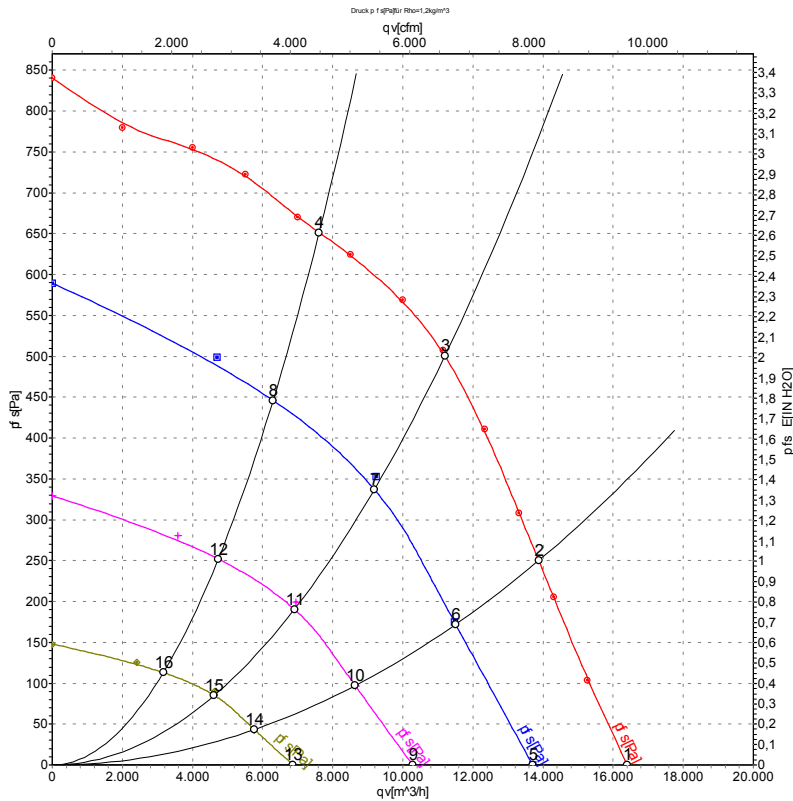

Measurement: LU-109182
 Measurement: LU-116038
 Measurement: LU-114211
 Measurement: LU-114210

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa
1	Y	400	50	1200	2020	3.07	78	85	91	16410	0
2	Y	400	50	1200	2458	3.72	74	82	88	13880	250
3	Y	400	50	1200	2800	4.20	72	79	86	11200	500
4	Y	400	50	1200	2629	3.98	73	81	87	7615	650
5	Y	400	50	1000	1103	1.70	72	79	85	13700	0
6	Y	400	50	1000	1315	2.01	69	76	82	11510	171
7	Y	400	50	1000	1520	2.32	67	74	81	9190	354
8	Y	400	50	1000	1338	2.05	68	75	82	6300	447
9	Y	400	50	750	474	0.82	64	71	77	10280	0
10	Y	400	50	750	554	0.92	61	68	74	8645	96
11	Y	400	50	750	654	1.05	59	67	73	6905	200
12	Y	400	50	750	572	0.94	60	67	74	4735	253
13	Y	400	50	500	161	0.35	53	60	66	6870	0
14	Y	400	50	500	179	0.38	50	57	63	5765	43
15	Y	400	50	500	208	0.43	49	57	63	4620	90
16	Y	400	50	500	188	0.40	49	56	63	3170	113

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
 LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase

