


# EC centrifugal module - RadiPac

backward curved, single inlet  
in cube design



K3G630-AR02-63 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G630-AR02-63    |            |
| Motor                    | M3G200-HF         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 1500       |
| Power input              | W                 | 6750       |
| Current draw             | A                 | 10.3       |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 50         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                                   |   | Actual | Request 2015 |
|-----------------------------------|---|--------|--------------|
| 01 Overall efficiency $\eta_{es}$ | % | 63.5   | 60.2         |
| 02 Measurement category           |   | A      |              |
| 03 Efficiency category            |   | Static |              |
| 04 Efficiency grade N             |   | 65.3   | 62           |
| 05 Variable speed drive           |   | Yes    |              |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

|                               |                   |       |
|-------------------------------|-------------------|-------|
| 09 Power input $P_{ed}$       | kW                | 6.76  |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 14635 |
| 09 Pressure increase $p_{fs}$ | Pa                | 1016  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 1505  |
| 11 Specific ratio*            |                   | 1.01  |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-141703




## Technical features

|                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 125 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Size                                                               | 630 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Surface of rotor                                                   | Coated in black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Material of electronics housing                                    | Die-cast aluminium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Material of impeller                                               | Aluminium sheet                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Material of inlet nozzle                                           | Sheet steel, galvanised and plastic-coated in light grey (RAL 7035)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Material of support structure                                      | Sheet steel, galvanised and plastic-coated in light grey (RAL 7035)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Number of blades                                                   | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Direction of rotation                                              | Clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Insulation class                                                   | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Humidity (F)/environmental protection class (H)                    | F4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Note ambient temperature                                           | Occasional start-up between -40°C and -25°C is permissible.<br>For continuous operation at ambient temperatures below -25°C (e.g. refrigeration applications) we recommend our fan version with special low-temperature bearings.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Max. permissible ambient motor temp. (transp./ storage)            | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Min. permissible ambient motor temp. (transp./storage)             | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Mounting position                                                  | Shaft horizontal (only base mounting) or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Condensate discharge holes                                         | Rotor-side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Output 20 VDC, max. 50 mA</li> <li>- Output for slave 0-10 V</li> <li>- Operation and alarm display</li> <li>- Input for sensor 0-10 V or 4-20 mA</li> <li>- External 24 V input (programming)</li> <li>- External release input</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limit</li> <li>- PFC, passive</li> <li>- RS485 MODBUS RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Electrical leads                                                   | Via terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Motor protection                                                   | Reverse polarity and locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Product conforming to standard                                     | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Approval                                                           | EAC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



## Product drawing

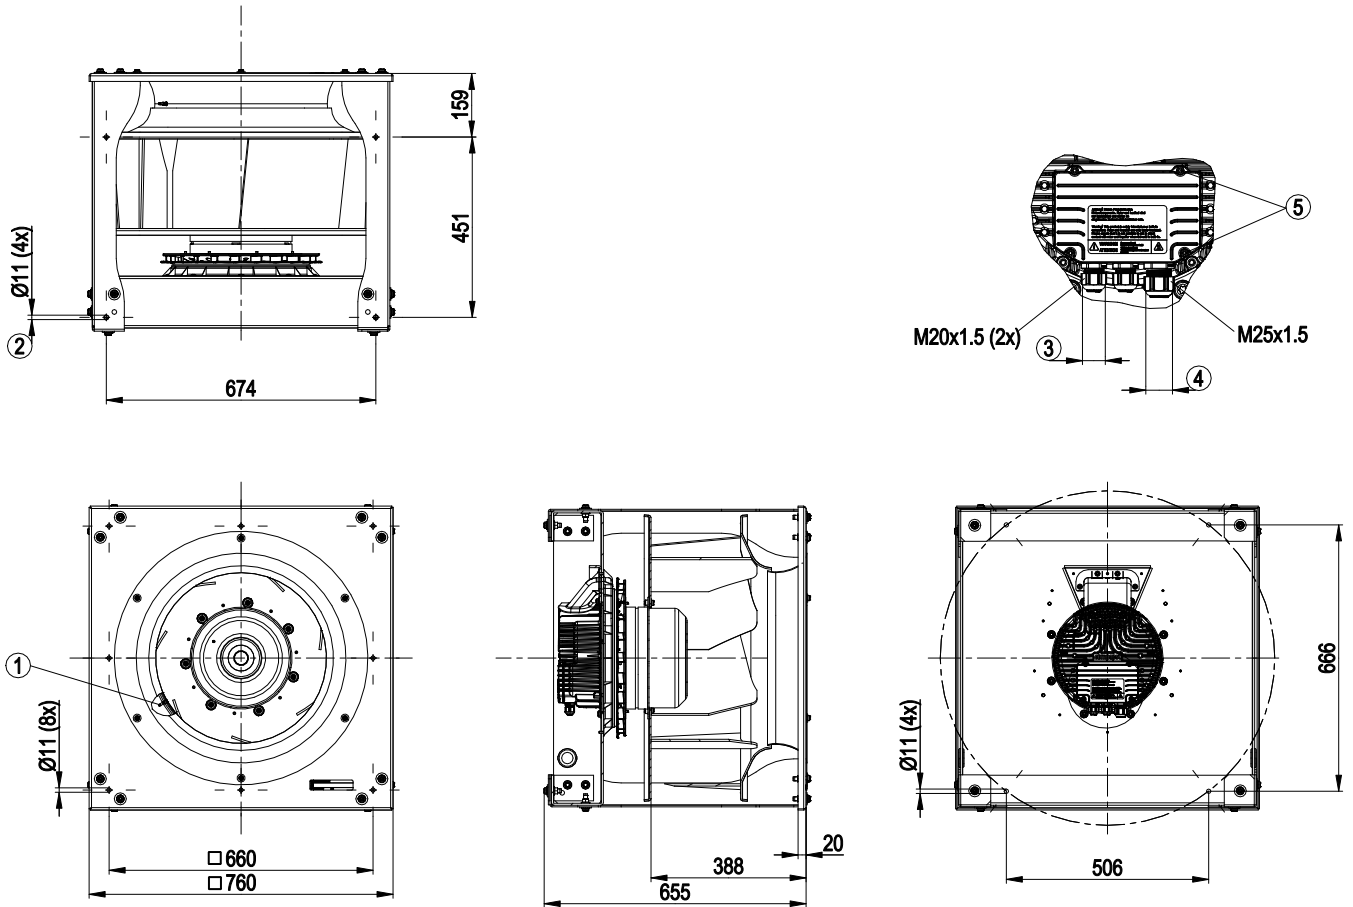

|   |                                                                      |
|---|----------------------------------------------------------------------|
| 1 | Inlet nozzle with pressure tap (k-factor: 438)                       |
| 2 | Screw-on position for vibration-absorbing elements                   |
| 3 | Cable diameter min. 4 mm, max. 10 mm, tightening torque $4\pm0.6$ Nm |
| 4 | Cable diameter min. 9 mm, max. 16 mm, tightening torque $6\pm0.9$ Nm |
| 5 | Tightening torque $3.5\pm0.5$ Nm                                     |

## EC centrifugal module - RadiPac

backward curved, single inlet

in cube design

## Connection screen

|    |         |         |   |
|----|---------|---------|---|
| 8  | Din 2   | RSA     | 1 |
| 9  | Din 3   | RSB     | 2 |
| 10 | GND     | GND     | 3 |
| 11 | Ain 2 U | Ain 1 U | 4 |
| 12 | + 20 V  | + 10 V  | 5 |
| 13 | Ain 2 I | Ain 1 I | 6 |
| 14 | Aout    | Din 1   | 7 |

KL 3

|   |     |
|---|-----|
| 1 | NO  |
| 2 | COM |
| 3 | NC  |

KL 2

|    |
|----|
| PE |
|----|

PE

|   |    |
|---|----|
| 1 | L1 |
| 2 | L2 |
| 3 | L3 |

KL 1

| No.  | Conn.  | Designation | Function / assignment                                                                                                                                                                                                                                                                                                    |
|------|--------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KL 1 | 1      | L1          | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz                                                                                                                                                                                                                                                          |
| KL 1 | 2      | L2          | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz                                                                                                                                                                                                                                                          |
| KL 1 | 3      | L3          | Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz                                                                                                                                                                                                                                                          |
| PE   |        | PE          | Earth connection, PE connection                                                                                                                                                                                                                                                                                          |
| KL 2 | 1      | NO          | Status relay, floating status contact; normally open; close with error                                                                                                                                                                                                                                                   |
| KL2  | 2      | COM         | Status relay; floating status contact; changeover contact; common connection; contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA                                                                                                                                                                                       |
| KL2  | 3      | NC          | Status relay, floating status contact; break with error                                                                                                                                                                                                                                                                  |
| KL 3 | 1      | RSA         | Bus connection RS-485, RSA, MODBUS RTU; SELV                                                                                                                                                                                                                                                                             |
| KL 3 | 2      | RSB         | Bus connection RS-485, RSB, MODBUS RTU; SELV                                                                                                                                                                                                                                                                             |
| KL 3 | 3 / 10 | GND         | Signal ground for control interface; SELV                                                                                                                                                                                                                                                                                |
| KL 3 | 4      | Ain1 U      | Analogue input 1, set value: 0-10 V, Ri = 100 kΩ, parametrisable curve, only usable as alternative to input Ain1; SELV                                                                                                                                                                                                   |
| KL 3 | 5      | + 10 V      | Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometer), SELV                                                                                                                                                                                    |
| KL 3 | 6      | Ain1 I      | Analogue input 1, set value: 4-20 mA; Ri = 100 Ω, parametrisable curve, only usable as alternative to input Ain1 U; SELV                                                                                                                                                                                                 |
| KL 3 | 7      | Din1        | Digital input 1: enabling of electronics,<br>enabling: open pin or applied voltage 5-50 VDC<br>disabling: bridge to GND or applied voltage <1 VDC<br>reset function: triggers software reset after a level change to <1 VDC; SELV                                                                                        |
| KL 3 | 8      | Din2        | Digital input 2: parameter set switch 1/2, according to EEPROM setting, the valid/used parameter set can be selected via bus or via digital input DIN2.<br>Parameter set 1: open pin or applied voltage 5-50 VDC<br>Parameter set 2: bridge to GND or applied voltage <1 VDC; SELV                                       |
| KL 3 | 9      | Din3        | Digital input 3: controller function of integrated controller, according to EEPROM setting, the controller function of the integrated controller is normally/inversely selectable per bus or per digital input<br>normal: open pin or applied voltage 5-50 VDC<br>inverse: bridge to GND or applied voltage <1 VDC; SELV |
| KL 3 | 11     | Ain2 U      | Analogue input 2, actual value: 0-10 V, Ri = 100 kΩ, parametrisable curve, only usable as alternative to input Ain2; SELV                                                                                                                                                                                                |
| KL 3 | 12     | + 20 V      | Fixed voltage output 20 VDC, +20 V ±5/-10%, max. 50 mA, short-circuit-proof, power supply for external devices (e.g. sensors); SELV                                                                                                                                                                                      |



# EC centrifugal module - RadiPac


backward curved, single inlet

in cube design

| No.  | Conn. | Designation | Function / assignment                                                                                                               |
|------|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------|
| KL 3 | 13    | Ain2 I      | Analogue input 2, actual value: 4-20 mA, Ri = 100 $\Omega$ , parametrisable curve, only usable as alternative to input Ain2 U; SELV |
| KL 3 | 14    | Aout        | Analogue output 0-10 VDC, max. 5 mA, output of the current motor level control coefficient / motor speed parametrisable curve; SELV |



## Charts: Air flow 50 Hz

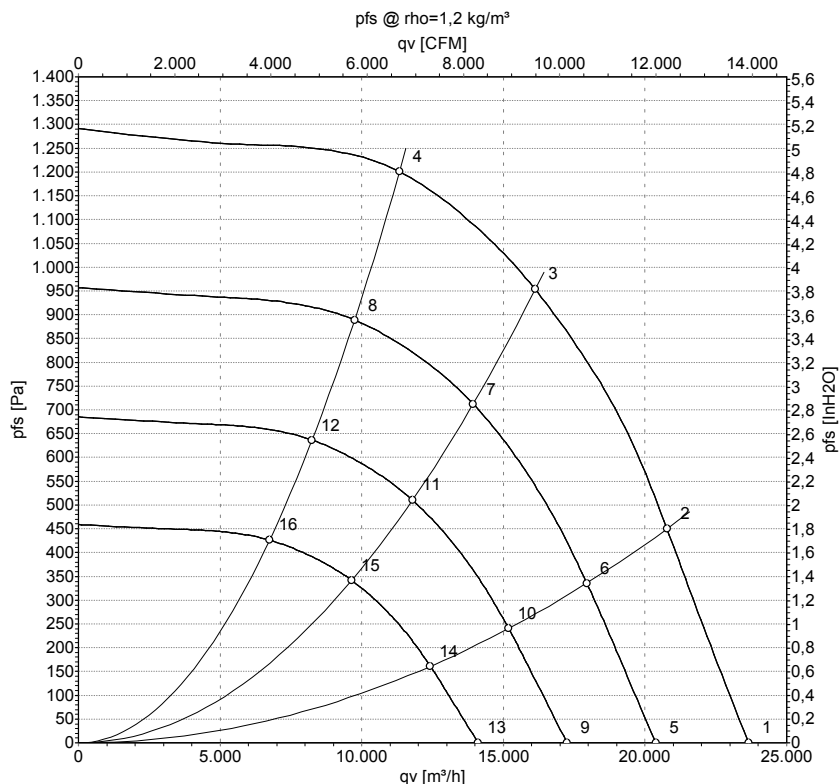

Measurement: LU-141703-1

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: LwA measured as per ISO 13347 /  
LpA measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I     | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|-------|-------------------|-------------------|--------------------|----------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A     | dB(A)             | dB(A)             | dB(A)              | m³/h           | Pa              | cfm            | inH2O           |
| 1  | 400 | 50 | 1500              | 4523            | 7.00  | 88                | 97                | 103                | 23655          | 0               | 13925          | 0.00            |
| 2  | 400 | 50 | 1500              | 5763            | 8.87  | 83                | 92                | 97                 | 20775          | 450             | 12225          | 1.81            |
| 3  | 400 | 50 | 1500              | 6750            | 10.30 | 80                | 88                | 93                 | 16120          | 950             | 9485           | 3.81            |
| 4  | 400 | 50 | 1500              | 6333            | 9.69  | 80                | 88                | 94                 | 11330          | 1200            | 6670           | 4.82            |
| 5  | 400 | 50 | 1300              | 2892            | 4.47  | 84                | 93                | 99                 | 20380          | 0               | 11995          | 0.00            |
| 6  | 400 | 50 | 1300              | 3720            | 5.72  | 79                | 88                | 94                 | 17945          | 338             | 10560          | 1.36            |
| 7  | 400 | 50 | 1300              | 4354            | 6.68  | 76                | 84                | 90                 | 13935          | 713             | 8200           | 2.86            |
| 8  | 400 | 50 | 1300              | 4027            | 6.16  | 76                | 84                | 91                 | 9750           | 896             | 5735           | 3.60            |
| 9  | 400 | 50 | 1100              | 1752            | 2.71  | 80                | 89                | 95                 | 17245          | 0               | 10150          | 0.00            |
| 10 | 400 | 50 | 1100              | 2253            | 3.47  | 75                | 84                | 89                 | 15185          | 242             | 8935           | 0.97            |
| 11 | 400 | 50 | 1100              | 2638            | 4.04  | 72                | 80                | 85                 | 11790          | 510             | 6940           | 2.05            |
| 12 | 400 | 50 | 1100              | 2440            | 3.73  | 72                | 80                | 86                 | 8250           | 642             | 4855           | 2.58            |
| 13 | 400 | 50 | 900               | 960             | 1.48  | 75                | 84                | 90                 | 14110          | 0               | 8305           | 0.00            |
| 14 | 400 | 50 | 900               | 1234            | 1.90  | 70                | 79                | 84                 | 12425          | 162             | 7310           | 0.65            |
| 15 | 400 | 50 | 900               | 1445            | 2.22  | 67                | 75                | 80                 | 9645           | 342             | 5675           | 1.37            |
| 16 | 400 | 50 | 900               | 1336            | 2.04  | 67                | 75                | 81                 | 6750           | 429             | 3970           | 1.72            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

