

AC centrifugal module

backward curved, single inlet
with support plate

K4D500-AT03-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	K4D500-AT03-01		
Motor	M4D138-HF		
Phase		3~	3~
Nominal voltage	VAC	230	400
Connection		Δ	Y
Frequency	Hz	50	50
Type of data definition		ml	ml
Valid for approval / standard		-	-
Speed	min ⁻¹	1375	1375
Power input	W	1430	1430
Current draw	A	5.2	3
Min. back pressure	Pa	0	0
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	85	85
Starting current	A	24	14

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC centrifugal module

backward curved, single inlet
with support plate

Technical features


Mass	39.4 kg
Size	500 mm
Surface of rotor	Cast in aluminium
Material of impeller	Aluminium sheet
Material of mounting plate	Sheet steel, galvanised
Material of distancing profiles	Aluminium
Material of inlet nozzle	Sheet steel, galvanised
Number of blades	9
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034; EN 61800-5-1
Approval	VDE



AC centrifugal module

backward curved, single inlet
with support plate

Product drawing

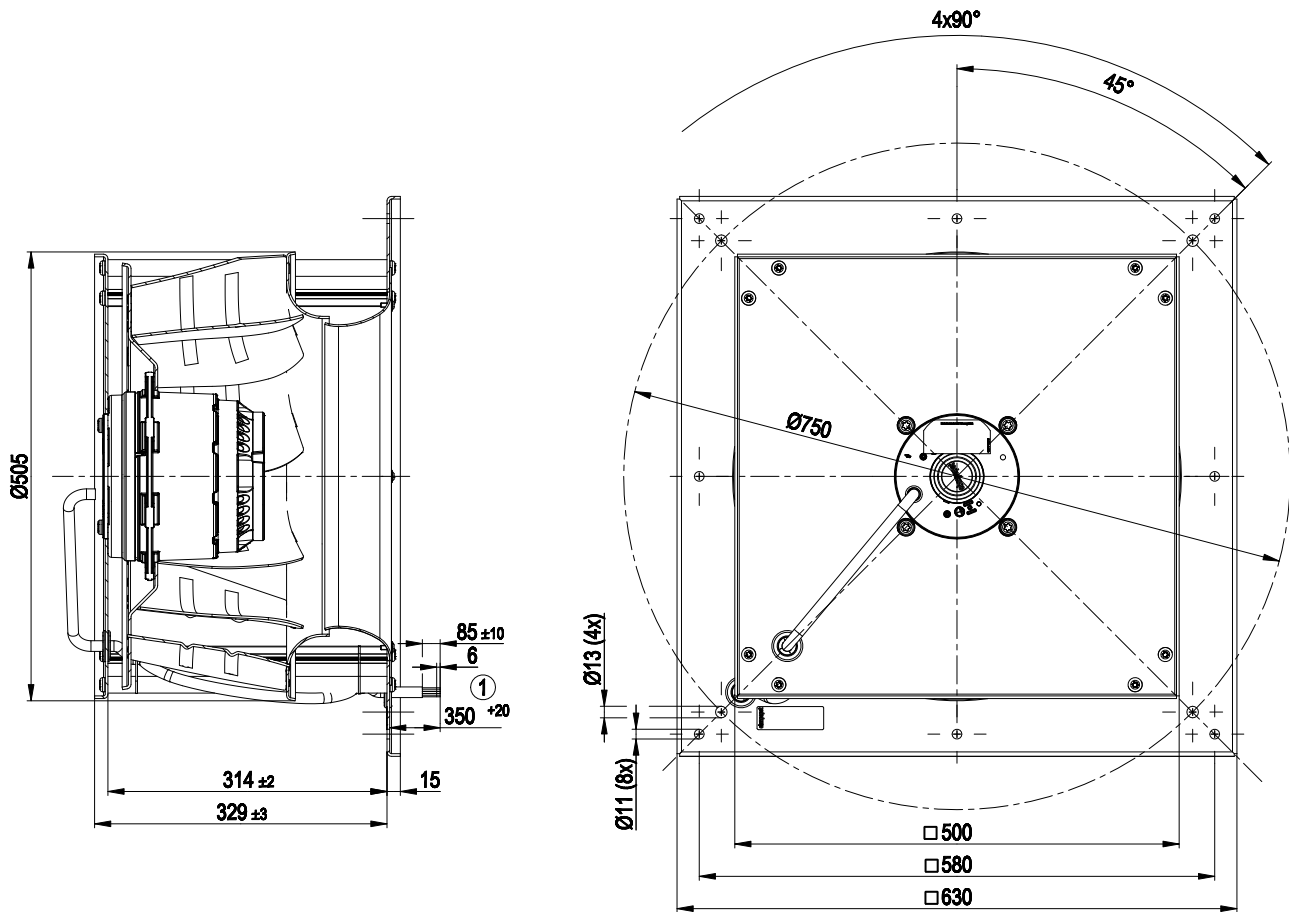


1 Connection line halogen-free, $9 \times 0.75 \text{ mm}^2$, $9 \times$ brass lead tips crimped

AC centrifugal module

backward curved, single inlet
with support plate

Connection screen

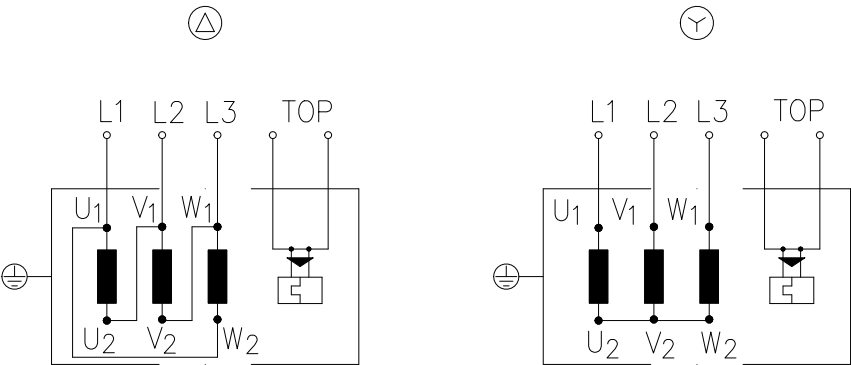

Changing the direction of rotation by reversing the two phases


Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green / yellow				



AC centrifugal module

backward curved, single inlet
with support plate

Charts: Air flow 50 Hz Y

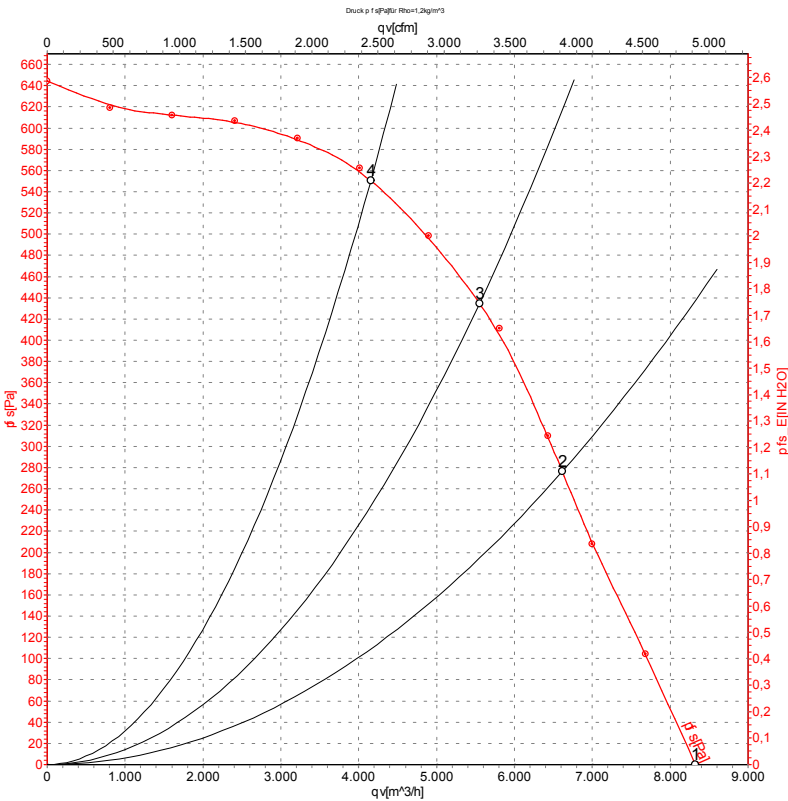

Measurement: LU-70632

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa
1	Y	400	50	1405	1157	2.64	8320	0
2	Y	400	50	1380	1358	2.88	6615	275
3	Y	400	50	1375	1430	3.00	5550	435
4	Y	400	50	1380	1334	2.86	4155	550

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

