

M4E068-DF33-81 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	M4E068-DF33-81	
Motor	M4E068-DF	
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	60
Method of obtaining data		me
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	1550
Power consumption	W	155
Power output	W	70
Current draw	A	1.4
Rated torque	Ncm	49
Mean starting torque	Ncm	36
Capacitor	μF	14
Capacitor voltage	VDB	220
Capacitor standard		S2 (CE)
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	-
Starting current	A	2.3

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change




Technical description

Weight	1.8 kg
Fan size	68 mm
Rotor surface	Unpainted
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 100; UL 1004-1




Product drawing

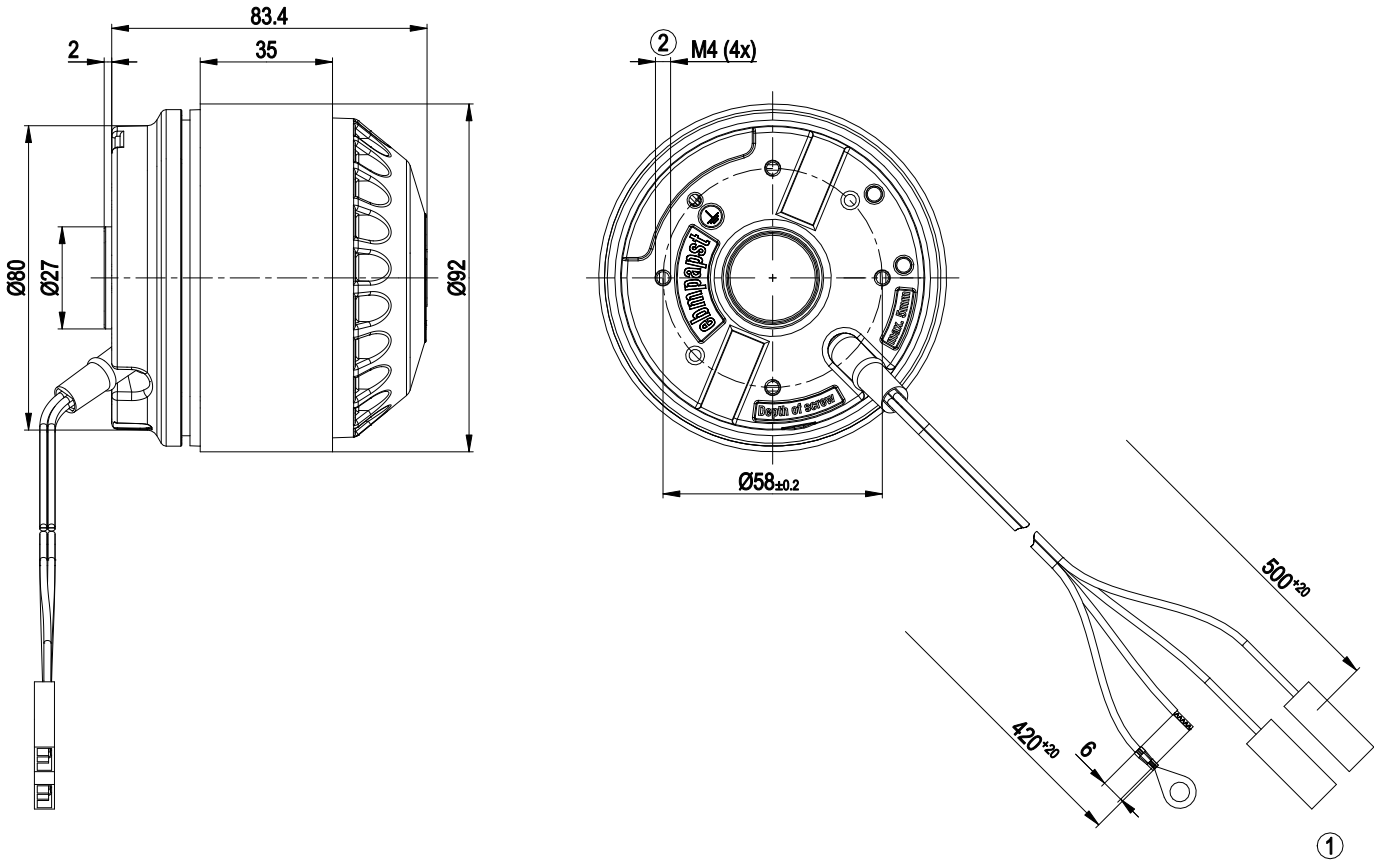

1	Cable FEP AWG18, 1x crimped splice, 1x ring terminal 5.2x8.7x15.7 crimped, 2x flat push-on receptacle 6.3-0.8 crimped, 2x Tyco connector housing 1-735075-0
2	Max. clearance for screw 5 mm

Connection diagram



U1	blue	Z	brown	U2	black
PE	green/yellow				



Curves: Speed (rpm)

