

QLK45/1212-3030 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	QLK45/1212-3030	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Speed	min ⁻¹	2300
Power consumption	W	29
Current draw	A	0.25
Min. ambient temperature	°C	0
Max. ambient temperature	°C	60
Air flow	m ³ /h	160
Pressure increase	Pa	55


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change




Technical description

Weight	1.85 kg
Dimensions	45 mm
Insulation class	B on request also F or H
Installation position	Horizontal
Cable	Flat plug 6.3 x 0.8

Product drawing

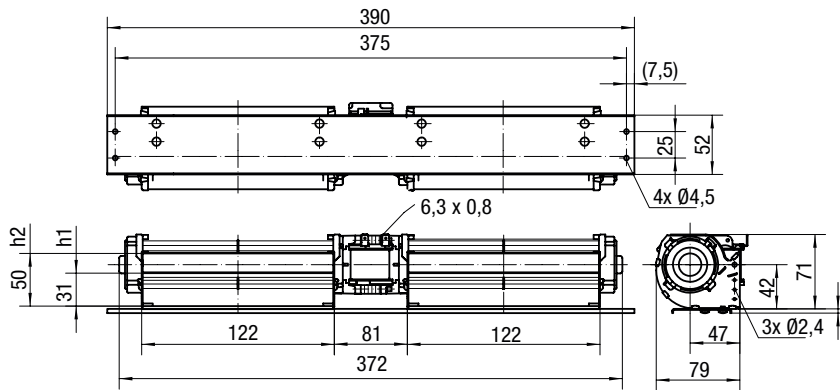

Curves: Air performance

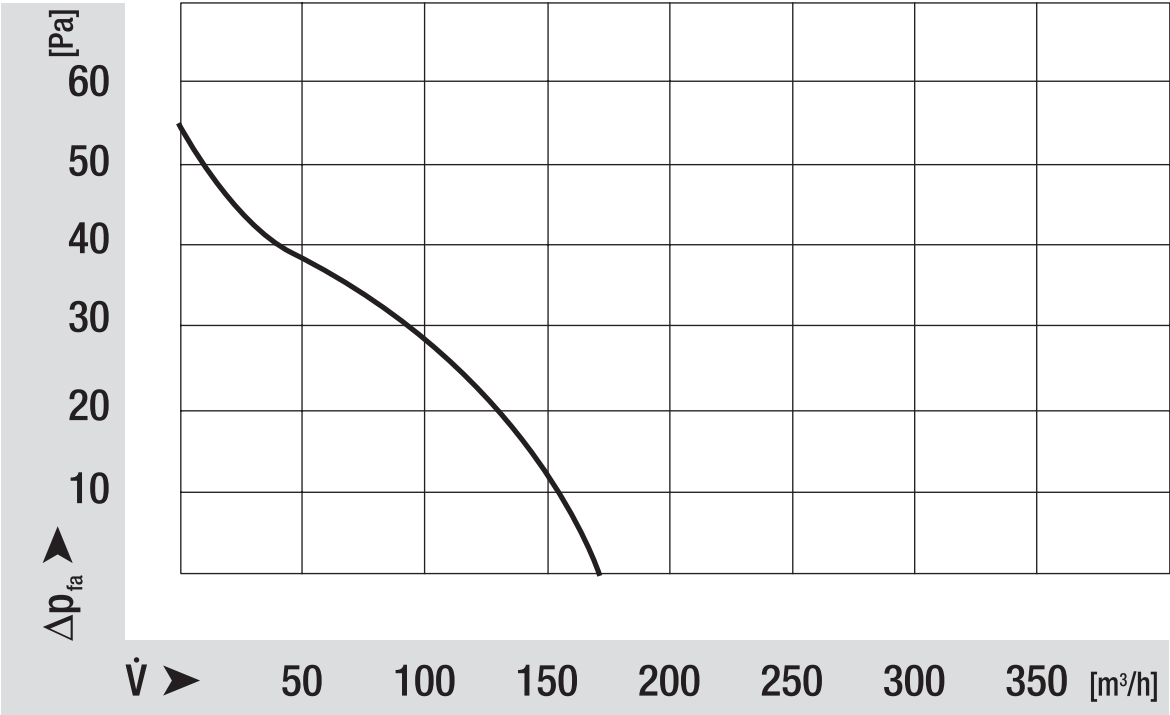

Curves: Speed

