

AC tangential blower

forward curved



QLK45/2400-2524L ebmpapst Datasheet
sales@fansco.com
84030 Landskron
www.fansco.com
Phone: +49 871 707-0
Fax: +49 871 707-465

Nominal data


Type	QLK45/2400-2524L	
Nominal voltage	[VAC]	230
Frequency	[Hz]	50
Speed	[min ⁻¹]	2200
Power input	[W]	32
Current draw	[A]	,28
Max. back pressure	[Pa]	64
Min. ambient temperature	[°C]	0
Max. ambient temperature	[°C]	60
Air flow	[m ³ /h]	190

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations


Technical features

Dimensions	45 mm
Connection line	Flat plug 6.3 x 0.8
Line	Compact series
Mounting position	Horizontal or vertical with motor below
Insulation class	"B" F or H also available on request
Mass	1.10 kg

Product drawing

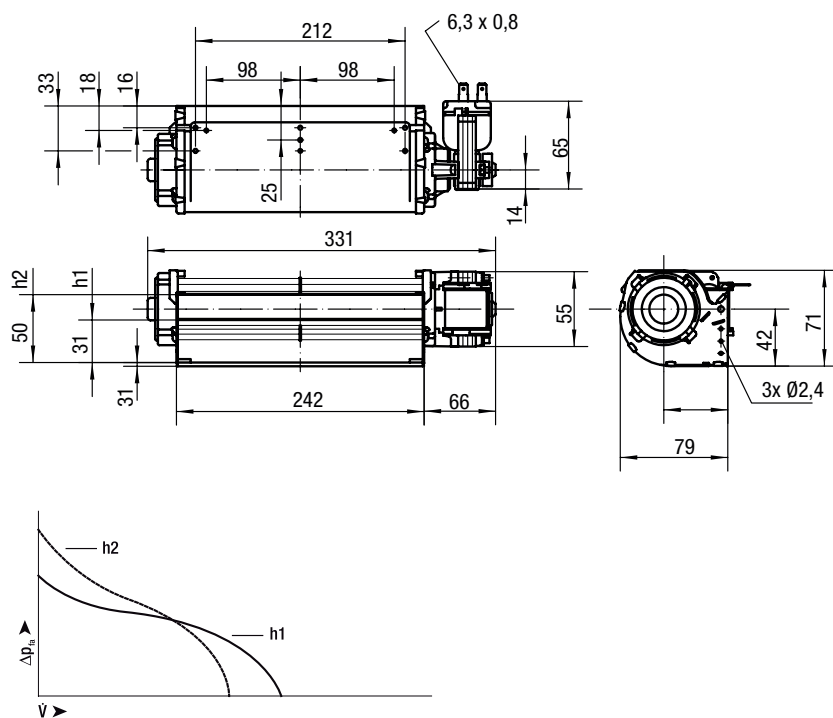

Charts: Air flow

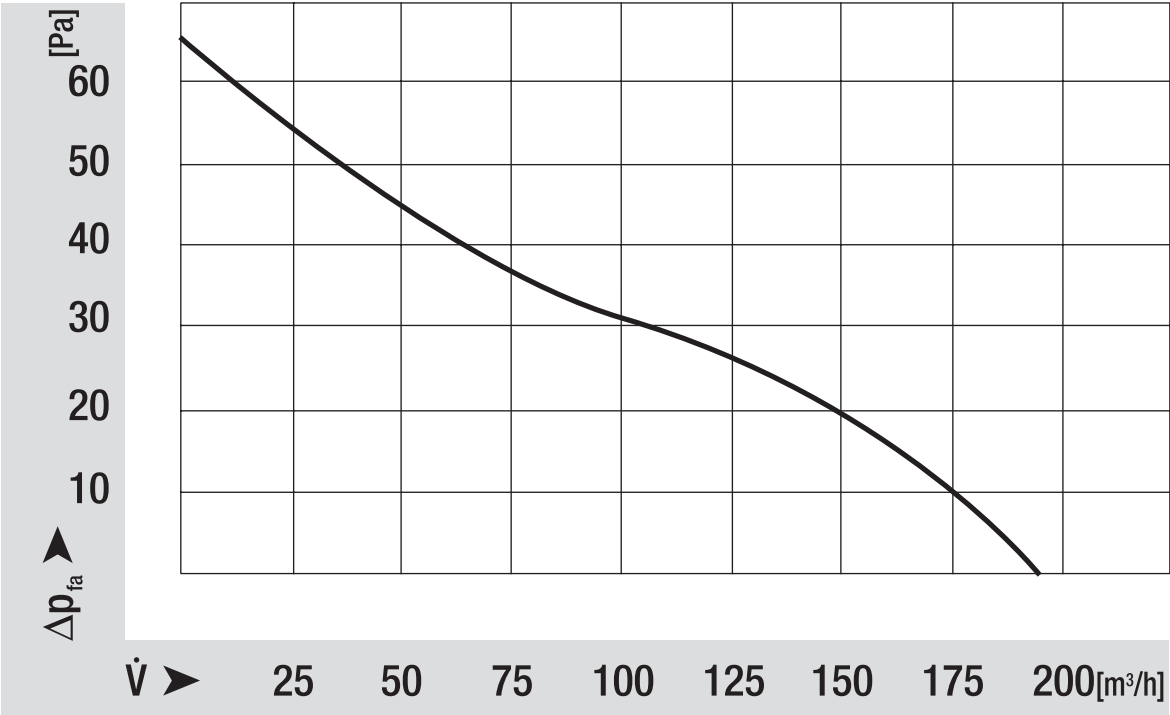

Charts: Speed

