

R1G190-AC37-54

# EC centrifugal fan

backward curved, single inlet



R1G190-AC37-54 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |          |
|--------------------------|-------------------|----------|
| Type                     | R1G190-AC37-54    |          |
| Motor                    | M1G074-BF         |          |
| Nominal voltage          | VDC               | 24       |
| Nominal voltage range    | VDC               | 16 .. 28 |
| Type of data definition  |                   | fa       |
| Speed                    | min <sup>-1</sup> | 3250     |
| Power input              | W                 | 80       |
| Current draw             | A                 | 3.7      |
| Min. ambient temperature | °C                | - 25     |
| Max. ambient temperature | °C                | + 60     |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations




## Technical features

|                                                         |                                                                                                                                   |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                    | 1.3 kg                                                                                                                            |
| Size                                                    | 190 mm                                                                                                                            |
| Surface of rotor                                        | Coated in black                                                                                                                   |
| Material of impeller                                    | PA plastic                                                                                                                        |
| Number of blades                                        | 7                                                                                                                                 |
| Direction of rotation                                   | Clockwise, seen on rotor                                                                                                          |
| Type of protection                                      | IP 42                                                                                                                             |
| Insulation class                                        | "B"                                                                                                                               |
| Humidity class                                          | F3-1                                                                                                                              |
| Max. permissible ambient motor temp. (transp./ storage) | +80 °C                                                                                                                            |
| Min. permissible ambient motor temp. (transp./storage)  | -40 °C                                                                                                                            |
| Mounting position                                       | Any                                                                                                                               |
| Condensate discharge holes                              | None                                                                                                                              |
| Operation mode                                          | S1                                                                                                                                |
| Motor bearing                                           | Ball bearing                                                                                                                      |
| Technical features                                      | <ul style="list-style-type: none"><li>- Motor current limit</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li></ul> |
| EMC interference immunity                               | Acc. to EN 61000-6-2 (industrial environment)                                                                                     |
| EMC interference emission                               | Acc. to EN 55022 (Class B, household environment)                                                                                 |
| Motor protection                                        | Reverse polarity and locked-rotor protection                                                                                      |
| Cable exit                                              | Variable                                                                                                                          |
| Product conforming to standard                          | EN 60950-1                                                                                                                        |

# EC centrifugal fan

backward curved, single inlet

## Product drawing

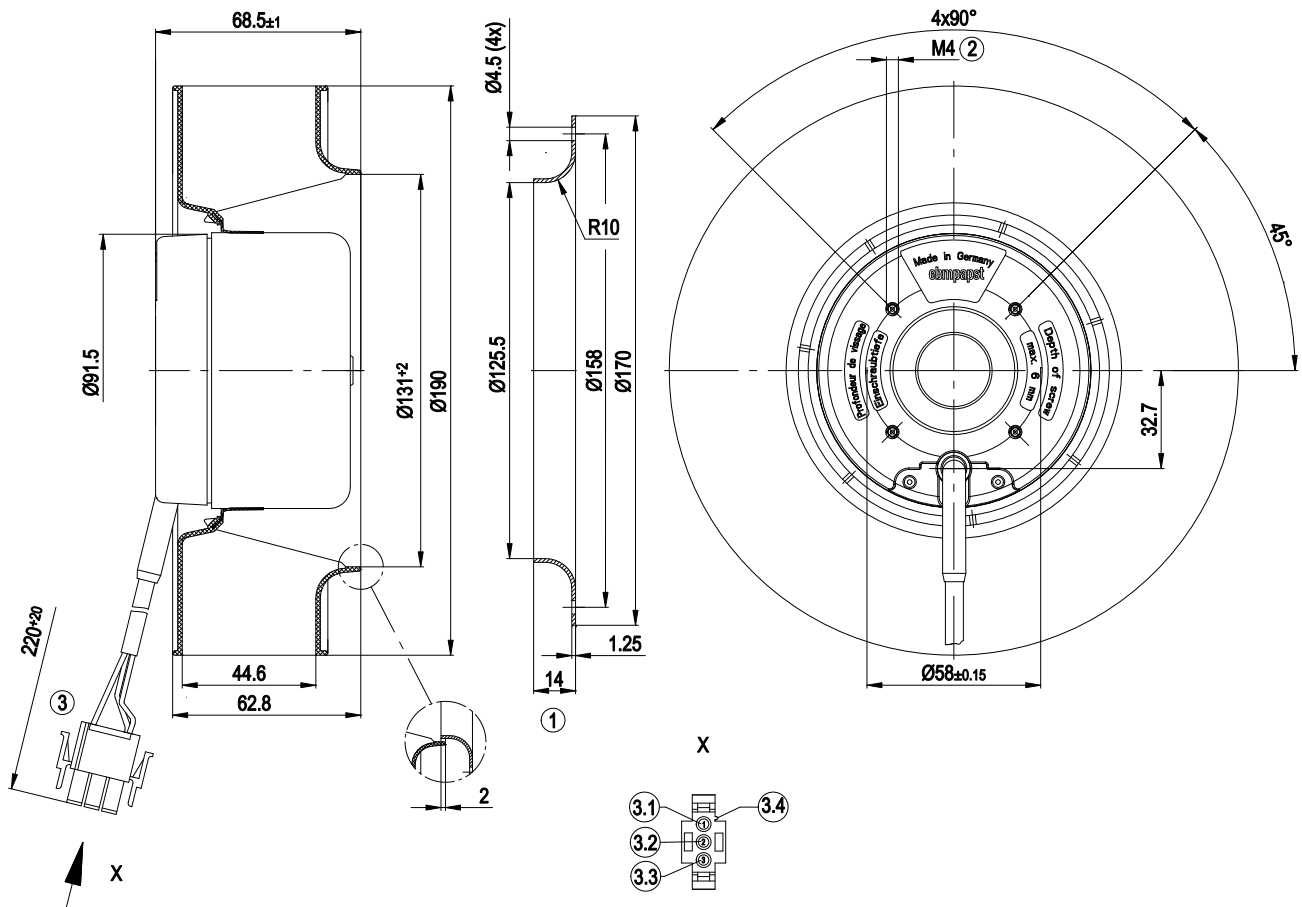


|     |                                                                                                                                                |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Accessory part: Inlet nozzle 09576-2-4013, not included in the standard scope of delivery                                                      |
| 2   | Depth of screw max. 6 mm                                                                                                                       |
| 3   | Connection line XLPO 3x 0.5 mm² with connector housing AMP no. 350766-4, 1x plug pin AMP no. 350538-1 and 1x plug pin AMP no. 926885-1 crimped |
| 3.1 | - (blue)                                                                                                                                       |
| 3.2 | not used                                                                                                                                       |
| 3.3 | + (red) and control input (yellow)                                                                                                             |
| 3.4 | Polarising rib                                                                                                                                 |

# EC centrifugal fan

backward curved, single inlet

## Connection screen

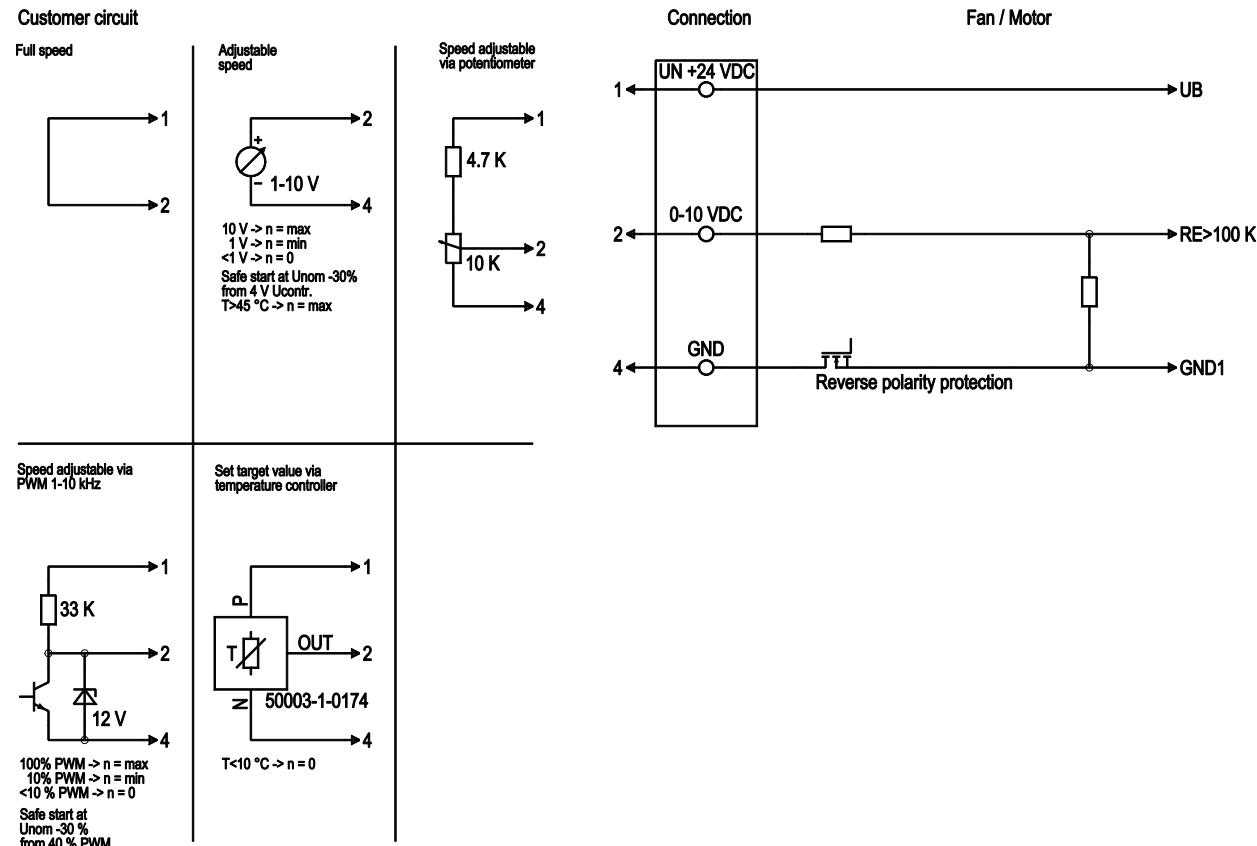


| Line | No. | Signal     | Colour | Function / assignment                      |
|------|-----|------------|--------|--------------------------------------------|
| 1    | 1   | Un +24 VDC | red    | Power supply 24 VDC, residual ripple 3.5 % |
| 1    | 2   | 0-10 VDC   | yellow | Control input Re > 100 k                   |
| 1    | 4   | GND        | blue   | Reference mass                             |



# EC centrifugal fan

backward curved, single inlet

## Charts: Air flow

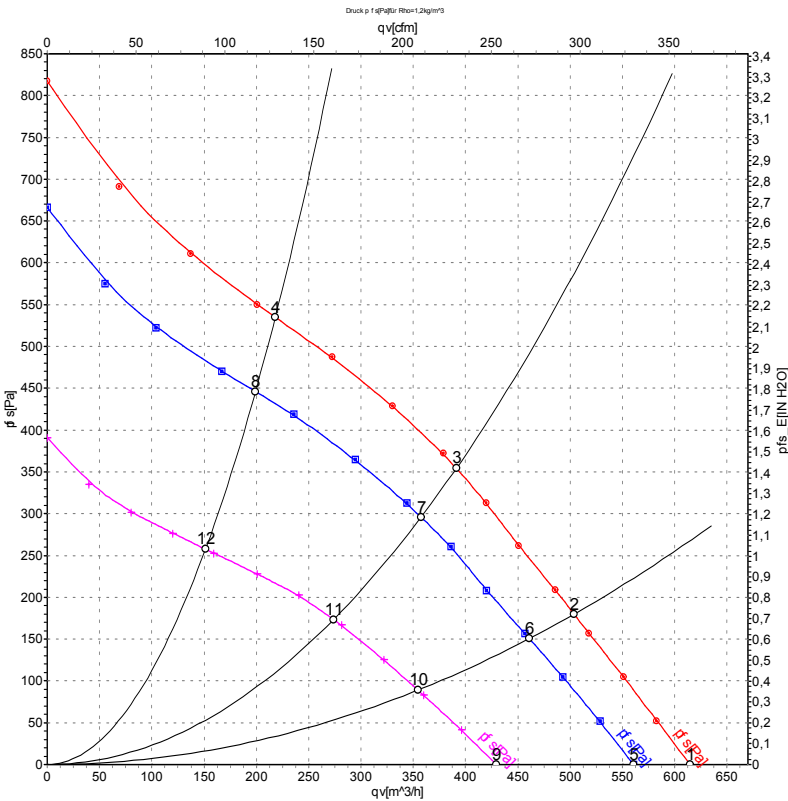

Measurement: LU-75809  
Measurement: LU-75808  
Measurement: LU-75807

Air performance measured as per ISO 5801  
Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U  | n                 | P <sub>ed</sub> | I    | qv                | p <sub>fs</sub> |
|----|----|-------------------|-----------------|------|-------------------|-----------------|
|    | V  | min <sup>-1</sup> | W               | A    | m <sup>3</sup> /h | Pa              |
| 1  | 28 | 3630              | 103             | 4.14 | 615               | 0               |
| 2  | 28 | 3540              | 107             | 4.30 | 505               | 180             |
| 3  | 28 | 3600              | 104             | 4.19 | 390               | 354             |
| 4  | 28 | 3705              | 100             | 4.01 | 220               | 535             |
| 5  | 24 | 3250              | 80              | 3.70 | 560               | 0               |
| 6  | 24 | 3230              | 82              | 3.82 | 460               | 150             |
| 7  | 24 | 3290              | 80              | 3.71 | 360               | 300             |
| 8  | 24 | 3380              | 76              | 3.53 | 200               | 450             |
| 9  | 16 | 2515              | 38              | 2.72 | 430               | 0               |
| 10 | 16 | 2470              | 39              | 2.80 | 355               | 89              |
| 11 | 16 | 2515              | 38              | 2.70 | 275               | 174             |
| 12 | 16 | 2560              | 36              | 2.61 | 150               | 258             |

U = Supply voltage · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

