

R1G225-RD14-02

EC centrifugal fan - RadiCal

backward-curved, single-intake



R1G225-RD14-02 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	R1G225-RD14-02	
Motor	M1G074-BF	
Nominal voltage	VDC	24
Nominal voltage range	VDC	16 .. 28
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2700
Power consumption	W	120
Current draw	A	4.9
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	70


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description


Weight	1.62 kg
Size	225 mm
Motor size	74
Rotor surface	Galvanized
Electronics housing material	Die-cast aluminum, painted black
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM, electronics IP6K9K (mating connector installed)
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H2+
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	<ul style="list-style-type: none"> - Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Overvoltage detection - Thermal overload protection for electronics - Reverse polarity protection
With cable	Axial
Protection class assignment	<p>III; Requires supply with safety extra-low voltage SELV.</p> <p>This component for installation may have several local protection classes. This information relates to this component's basic design.</p> <p>The final protection class is based on the component's intended installation and connection. If there is a PE connection point on the housing, it must not be visible after installation.</p>
Approval	EAC; CSA C22.2 No. 113; UL 507

Product drawing

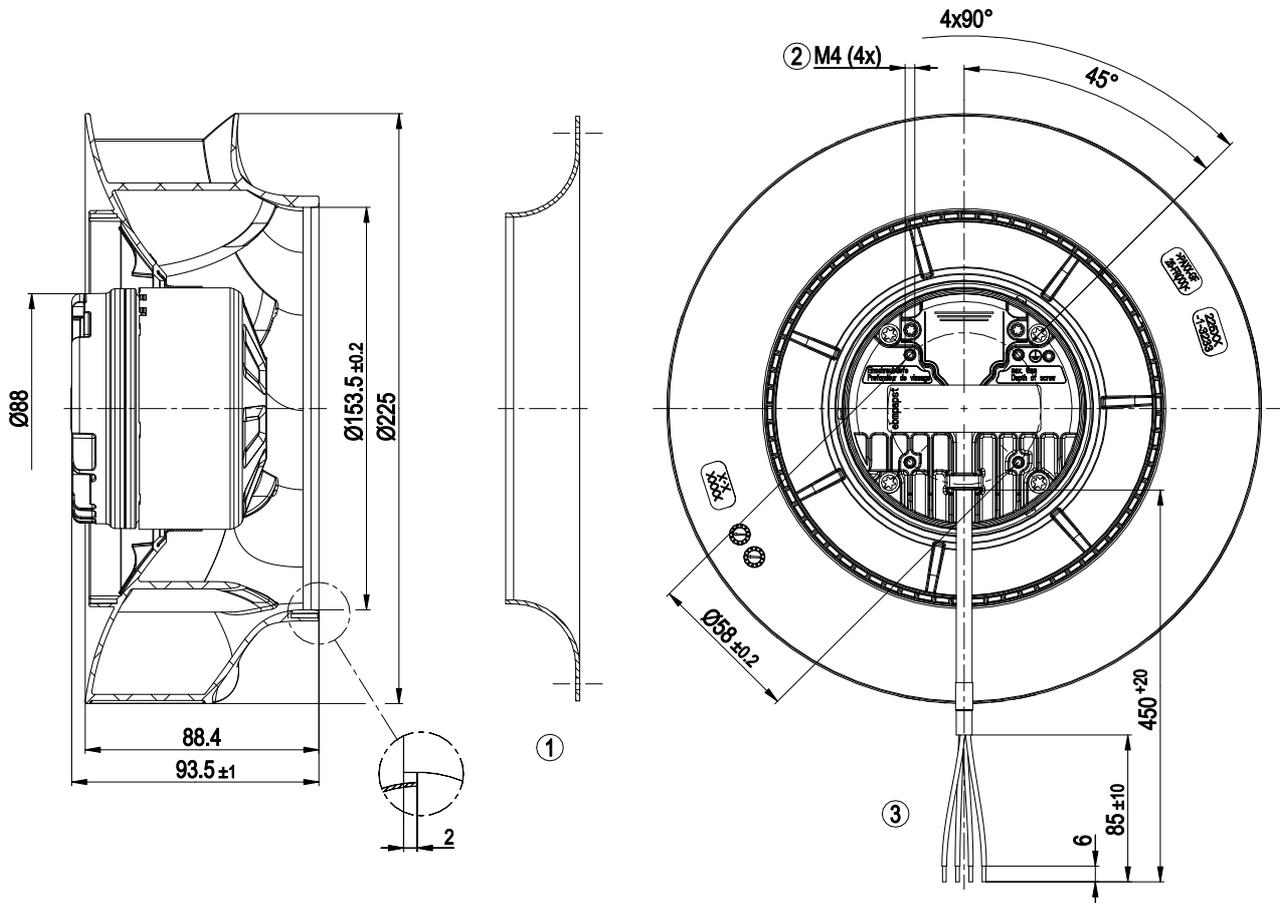


- | | |
|---|---|
| 1 | Accessory part: inlet ring 96358-2-4013 not included in scope of delivery |
| 2 | Max. clearance for screw 6 mm |
| 3 | Cable PVC 4x AWG18, insulating hose |
| | 4x splice |

Accessory part

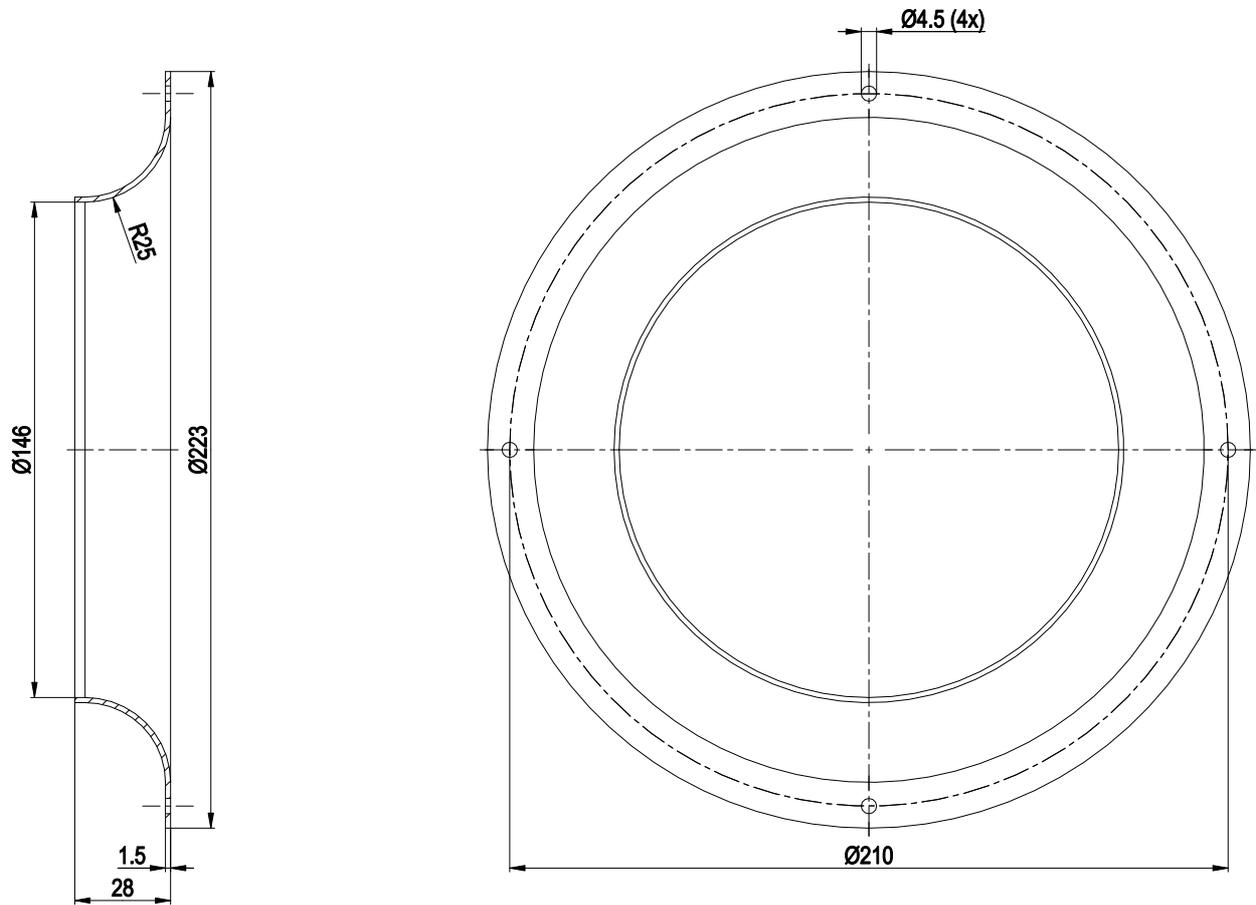


Inlet ring 96358-2-4013 not included in scope of delivery

Connection diagram

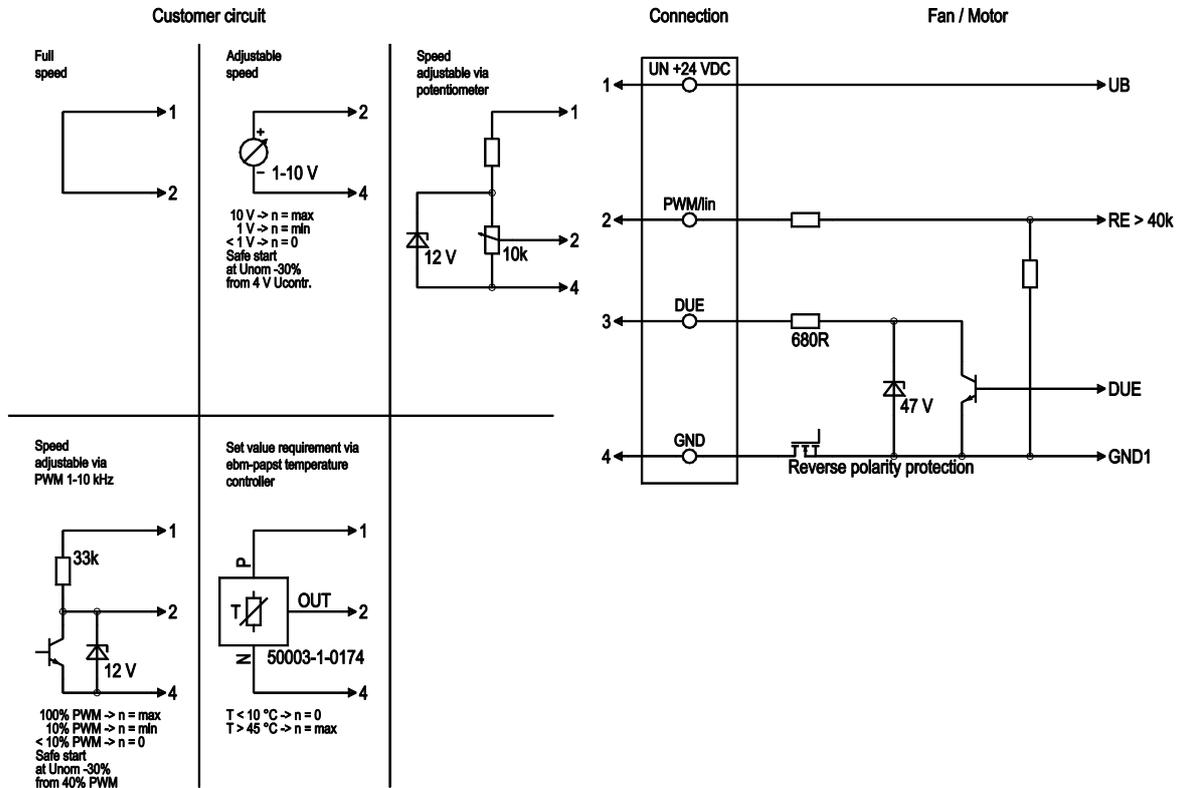

No.	Conn.	Designation	Color	Function/assignment
	1	UN +24 VDC	red	Power supply 24 VDC, maximum ripple 3.5%
	2	PWM/LIN	yellow	Control input Re > 40k
	3	DUE	white	Tach output, 3 pulses per revolution, Isink max = 10 mA
	4	GND	blue	Reference ground

Curves: Air performance

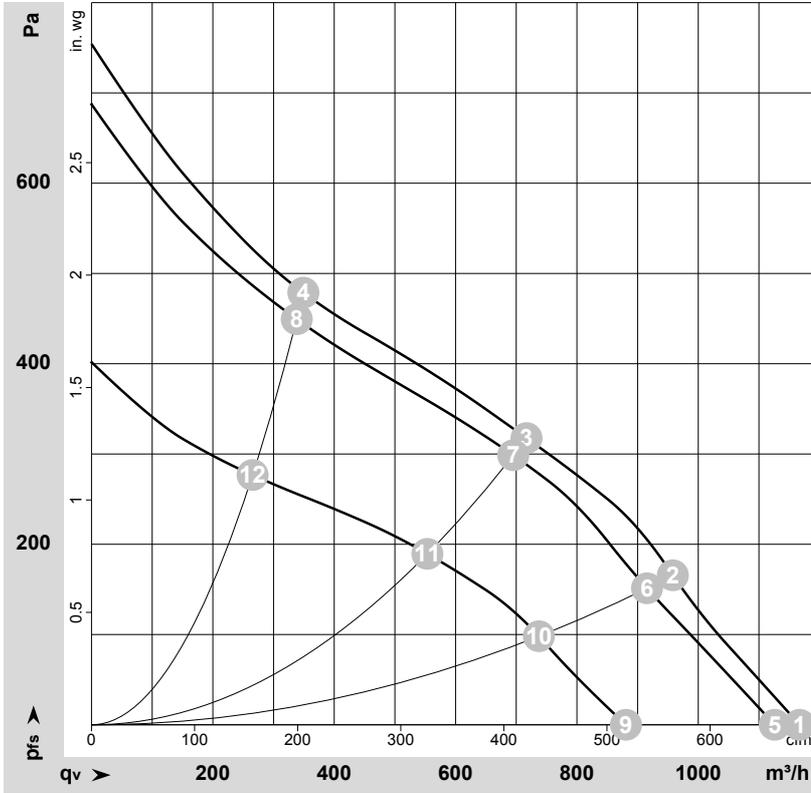

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-184599-1
 Measurement: LU-184546-1
 Measurement: LU-184597-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	28	2775	130	4.63	1165	0	685	0.00
2	28	2645	134	4.77	960	166	565	0.67
3	28	2600	135	4.82	715	318	420	1.28
4	28	2790	129	4.60	350	479	205	1.92
5	24	2700	120	4.90	1125	0	665	0.00
6	24	2535	121	5.06	915	150	540	0.60
7	24	2525	121	5.06	695	300	410	1.20
8	24	2710	117	4.87	340	450	200	1.81
9	16	2110	57	3.58	880	0	520	0.00
10	16	2050	61	3.79	735	98	435	0.39
11	16	2025	62	3.89	555	189	325	0.76
12	16	2125	57	3.57	265	277	155	1.11

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

