

R1G225-RD61-02

# EC centrifugal fan - RadiCal

backward curved, single inlet



R1G225-RD61-02 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142

## Nominal data

Type	R1G225-RD61-02	
Motor	M1G074-BF	
Nominal voltage	VDC	12
Nominal voltage range	VDC	8 .. 16
Type of data definition		fa
State		prelim.
Speed (rpm)	min <sup>-1</sup>	2350
Power input	W	80
Current draw	A	7.9
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60


ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



### Technical features


<b>Mass</b>	1.6 kg
<b>Size</b>	225 mm
<b>Surface of rotor</b>	Galvanised
<b>Material of electronics housing</b>	Die-cast aluminium, coated in black
<b>Material of impeller</b>	PA plastic
<b>Number of blades</b>	7
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Type of protection</b>	IP 24 KM; Electronics IP 66 / 69 K
<b>Insulation class</b>	"B"
<b>Humidity (F)/environmental protection class (H)</b>	H2+
<b>Note ambient temperature</b>	Occasional start-up between -40°C and -25°C is permissible. For continuous operation at ambient temperatures below -25°C (e.g. refrigeration applications) we recommend our fan version with special low-temperature bearings.
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+70 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	-40 °C
<b>Mounting position</b>	Shaft horizontal or rotor on bottom; rotor on top on request
<b>Condensate discharge holes</b>	Rotor-side
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing; (sealed)
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Tach output</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Overvoltage detection</li> </ul>
<b>Motor protection</b>	Reverse polarity and locked-rotor protection
<b>Cable exit</b>	Axial
<b>Approval</b>	UL 507; EAC

Product drawing

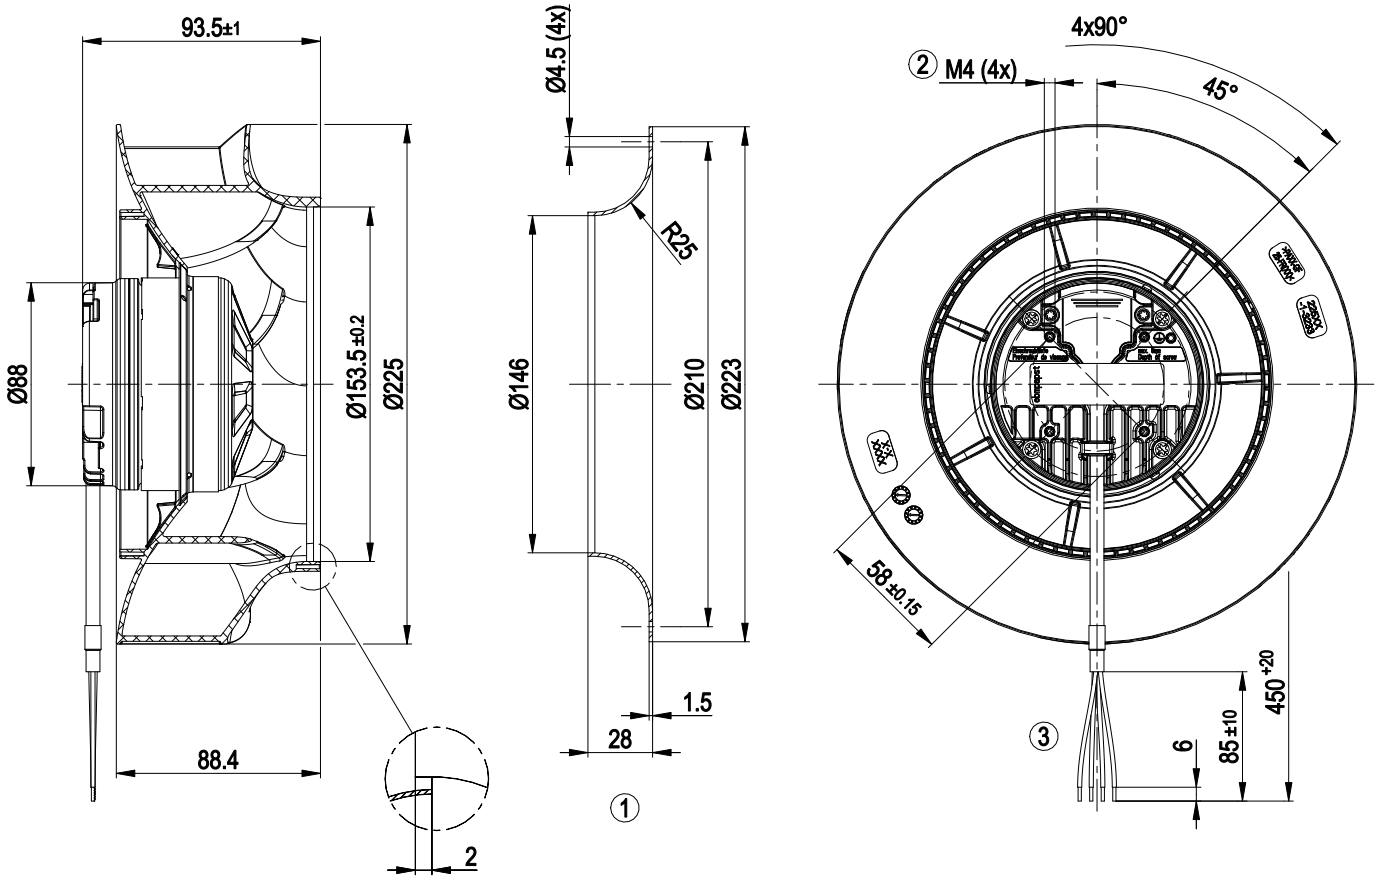


- |   |   |
|---|---|
| 1 | Accessory part: Inlet nozzle 96358-2-4013 not included in scope of delivery |
| 2 | Thread reach max. 6 mm  |
| 3 | Connection line PVC 4x AWG18, insulating sleeve, 4x lead tips crimped       |

## Connection screen

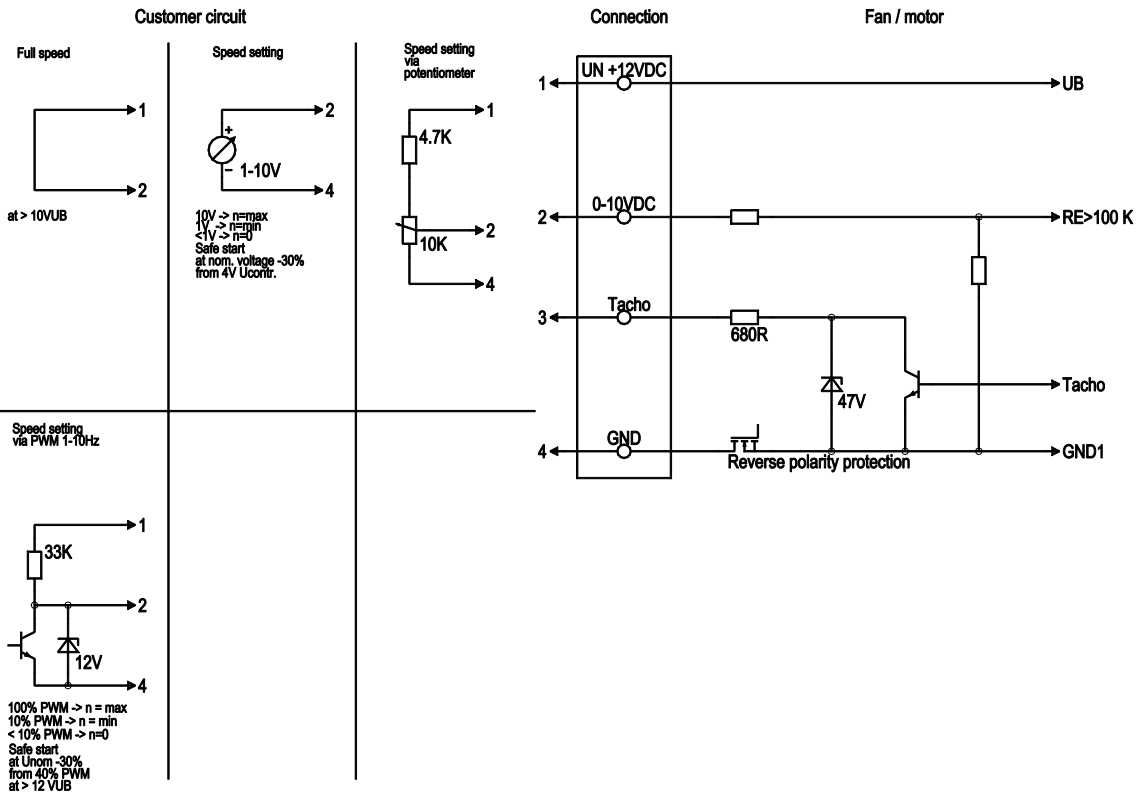

No.	Conn.	Designation	Colour	Function / assignment
	1	Un +12VDC	red	Power supply 12 VDC, see type plate for voltage range, residual ripple 3.5%
	2	PWM/LIN	yellow	Control input Re > 40 k (PWM 1-10 kHz/0-10 V)
	3	Tacho	white	Speed monitoring output, 3 pulses per revolution, Isink max = 10 mA
	4	GND	blue	Reference mass

## Charts: Air flow

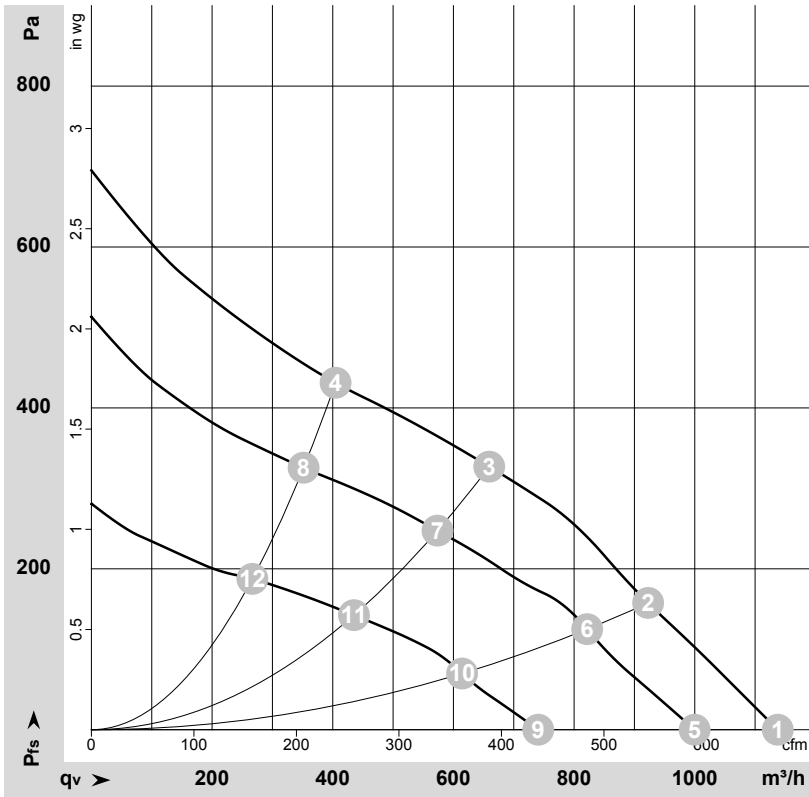

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-158288-1  
 Measurement: LU-164794-1  
 Measurement: LU-164965-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L<sub>wA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	inH2O
1	16	2710	128	9.97			1140	0	670	0.00
2	16	2580	138	10.92			925	157	545	0.63
3	16	2585	137	10.87			660	327	390	1.31
4	16	2695	131	10.23			405	430	240	1.73
5	12	2350	80	7.90	64	72	1000	0	590	0.00
6	12	2285	85	8.37	60	67	820	125	485	0.50
7	12	2260	86	8.48	55	63	575	250	340	1.00
8	12	2345	81	7.91	59	67	350	325	205	1.30
9	8	1795	36	5.18			740	0	435	0.00
10	8	1740	37	5.51			615	70	360	0.28
11	8	1725	38	5.56			435	142	255	0.57
12	8	1785	36	5.19			265	188	155	0.75

U = Supply voltage · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

