

R1G280-AE47-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Phone: +49 7938 81-0

Fax: +49 7938 81-110

## Nominal data


Type	R1G280-AE47-15	
Motor	M1G074-CF	
Nominal voltage	[VDC]	48
Nominal voltage range	[VDC]	36 .. 57
Type of data definition		rfa
Speed	[min <sup>-1</sup> ]	1710
Power input	[W]	95
Current draw	[A]	2.3
Min. ambient temperature	[°C]	- 25
Max. ambient temperature	[°C]	+60

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit  
 Subject to alterations

### Technical features

<b>Size</b>	280 mm
<b>Stability</b>	Salt fog resistant in accordance with TELCORDIA GR-487-CORE, release No. 2, M 2000
<b>Operation mode</b>	S1
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Mounting position</b>	Any
<b>EMC interference emission</b>	Acc. to EN 55022 (Class B)
<b>EMC interference immunity</b>	Acc. to EN 61000-6-2 (industrial environment)
<b>Humidity class</b>	F4-2
<b>Insulation class</b>	"B"
<b>Cable exit</b>	Variable
<b>Condensate discharge holes</b>	None
<b>Bearing motor</b>	Ball bearing
<b>Mass</b>	2.8 kg
<b>Material of impeller</b>	Sheet steel, coated in black
<b>Motor protection</b>	Reverse polarity and locked-rotor protection
<b>Surface of rotor</b>	Coated in black
<b>Number of blades</b>	11
<b>Type of protection</b>	IP 44
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Control input 0-10 VDC / PWM</li> <li>- Tach output</li> <li>- Motor current limit</li> <li>- Soft start</li> </ul>
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	-40 °C
<b>Approval</b>	CCC; CSA; UL

Product drawing

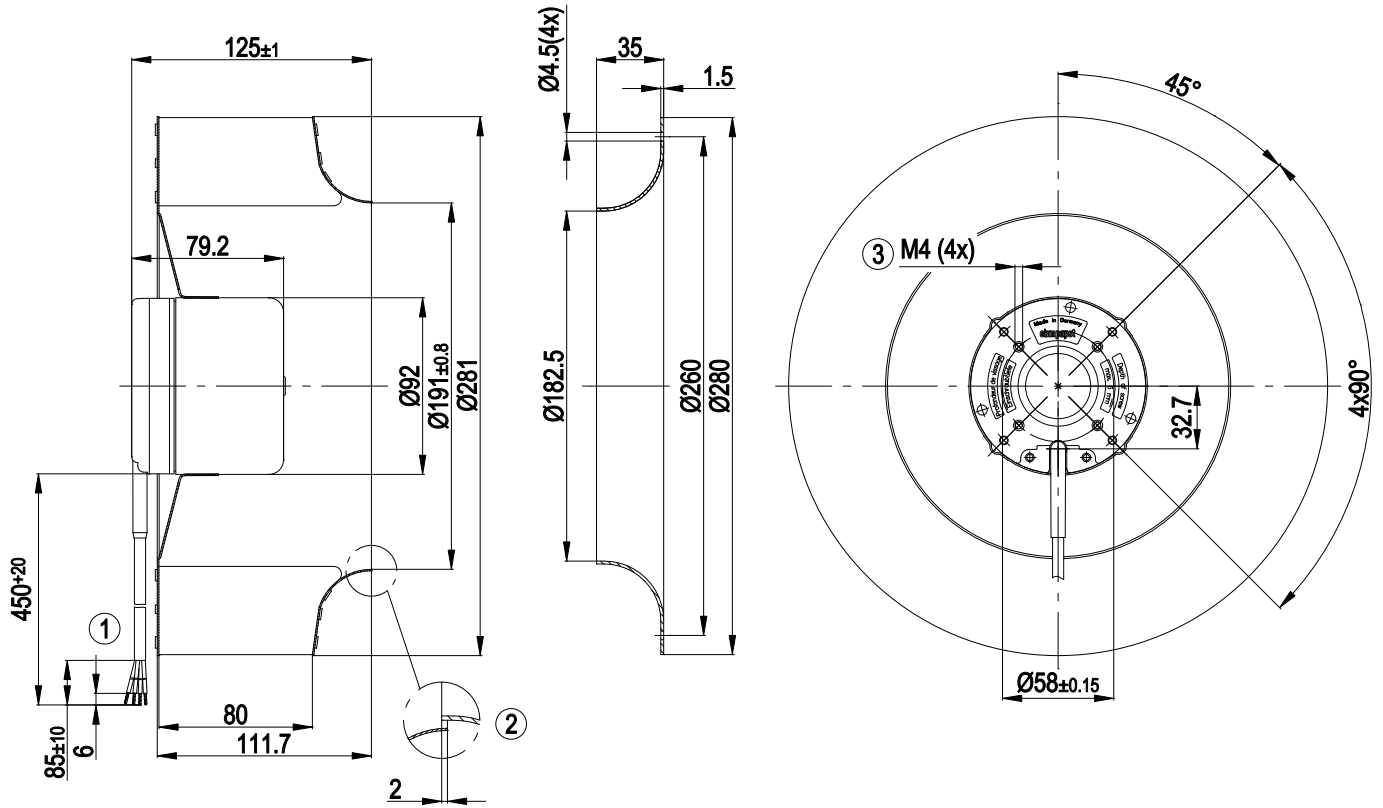


1	Connection line AWG20, 4 x brass lead tips crimped
2	Accessory part: Inlet nozzle 96360-2-4013, not included in the standard scope of delivery
3	Depth of screw max. 6 mm


## Connection screen

### Customer circuit

#### Full speed




#### Speed setting




10 V → n = max  
 1 V → n = min  
 <1 V → n = 0  
 Safe start  
 at Unom -30 %  
 from 4 V Ucontr.

#### Speed setting via potentiometer




#### Speed setting via PWM 1-10 kHz



100 % PWM → n = max  
 10 % PWM → n = min  
 <10 % PWM → n = 0  
 Safe start  
 at Unom -30 %  
 from 40% PWM


#### Set value via temperature controller



T < 10 °C → n = 0  
 T > 45 °C → n = max


### Connection

### Fan / motor

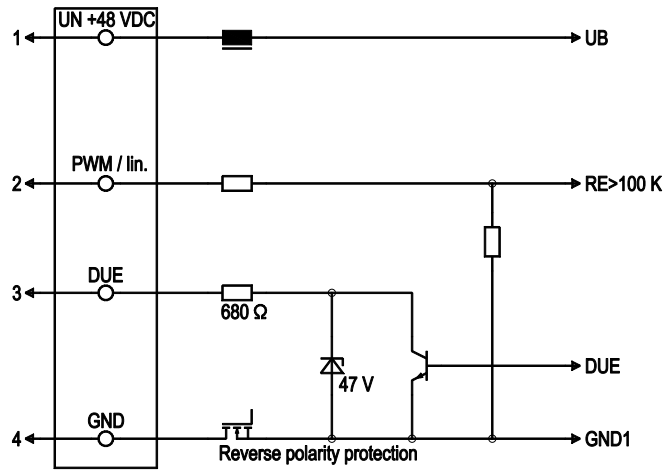

Line	No.	Signal	Colour	Function / assignment
1	1	Un +48 VDC	red	Power supply 48 VDC, residual ripple 3.5 %
1	2	PWM / lin	yellow	PWM / lin. control input, 0-10 V
1	3	DUE	white	Speed monitoring output, 3 pulses per rotation, Isink max = 10 mA
1	4	GND	blue	Reference mass

## Charts: Air flow

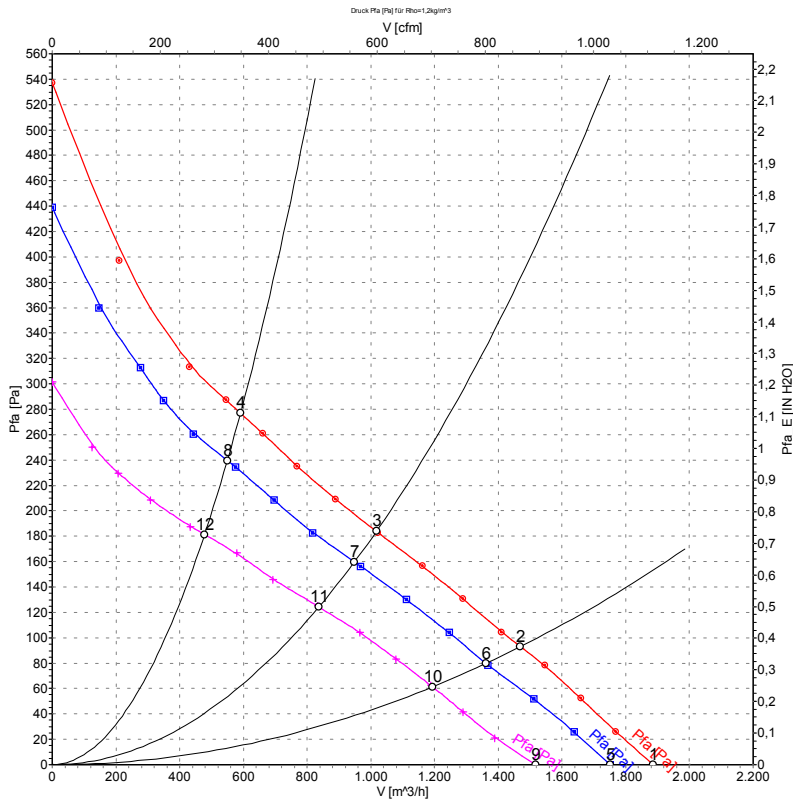

Measurement: LU-54793  
 Measurement: LU-54792  
 Measurement: LU-54790

## Measured values

	U	n	P <sub>1</sub>	I	$\hat{V}$	p <sub>fa</sub>
	[V]	[min <sup>-1</sup> ]	[W]	[A]	[m <sup>3</sup> /h]	[Pa]
1	57	1845	118	2.54	1885	0
2	57	1695	126	2.76	1470	93
3	57	1620	130	2.87	1020	184
4	57	1755	123	2.66	590	277
5	48	1710	95	2.30	1750	0
6	48	1580	99	2.46	1360	80
7	48	1515	102	2.55	950	160
8	48	1635	98	2.39	550	240
9	36	1480	61	1.90	1515	0
10	36	1385	67	2.10	1195	62
11	36	1335	70	2.19	835	124
12	36	1420	64	2.01	480	181