

R2D225-RA26-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

| | | | |
|-----------------------------|-------------------|------|------|
| Type | R2D225-RA26-01 | | |
| Motor | M2D068-DF | | |
| Phase | | 3~ | 3~ |
| Nominal voltage | VAC | 400 | 480 |
| Wiring | | Y | Y |
| Frequency | Hz | 50 | 60 |
| Method of obtaining data | | ml | ml |
| Valid for approval/standard | | CE | CE |
| Speed (rpm) | min ⁻¹ | 2530 | 2900 |
| Power consumption | W | 150 | 235 |
| Current draw | A | 0.27 | 0.33 |
| Min. back pressure | Pa | 0 | 0 |
| Min. back pressure | in. wg | 0 | 0 |
| Min. ambient temperature | °C | -25 | -25 |
| Max. ambient temperature | °C | 80 | 55 |
| Starting current | A | 0.74 | 0.83 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

| | | Actual | Req. 2015 | | | |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|------|
| 01 Overall efficiency η_{es} | % | 43.6 | 42.6 | 09 Power consumption P_e | kW | 0.14 |
| 02 Measurement category | | A | | 09 Air flow q_v | m ³ /h | 705 |
| 03 Efficiency category | | Static | | 09 Pressure increase p_{fs} | Pa | 318 |
| 04 Efficiency grade N | | 63 | 62 | 10 Speed (rpm) n | min ⁻¹ | 2555 |
| 05 Variable speed drive | | No | | 11 Specific ratio* | | 1.00 |

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-140430



Technical description


| | |
|--|--|
| Weight | 2.13 kg |
| Size | 225 mm |
| Motor size | 68 |
| Impeller material | PA plastic |
| Number of blades | 7 |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP44; installation- and position-dependent |
| Insulation class | "F" |
| Moisture (F) / Environmental (H) protection class | H0+ |
| Max. permitted ambient temp. for motor (transport/storage) | + 80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | - 40 °C |
| Installation position | Any |
| Condensation drainage holes | None |
| Mode | S1 |
| Motor bearing | Ball bearing |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA |
| Motor protection | Thermal overload protector (TOP) with basic insulation |
| With cable | Axial |
| Protection class | I (with customer connection of protective earth) |
| Conformity with standards | EN 60335-1; CE |

Product drawing

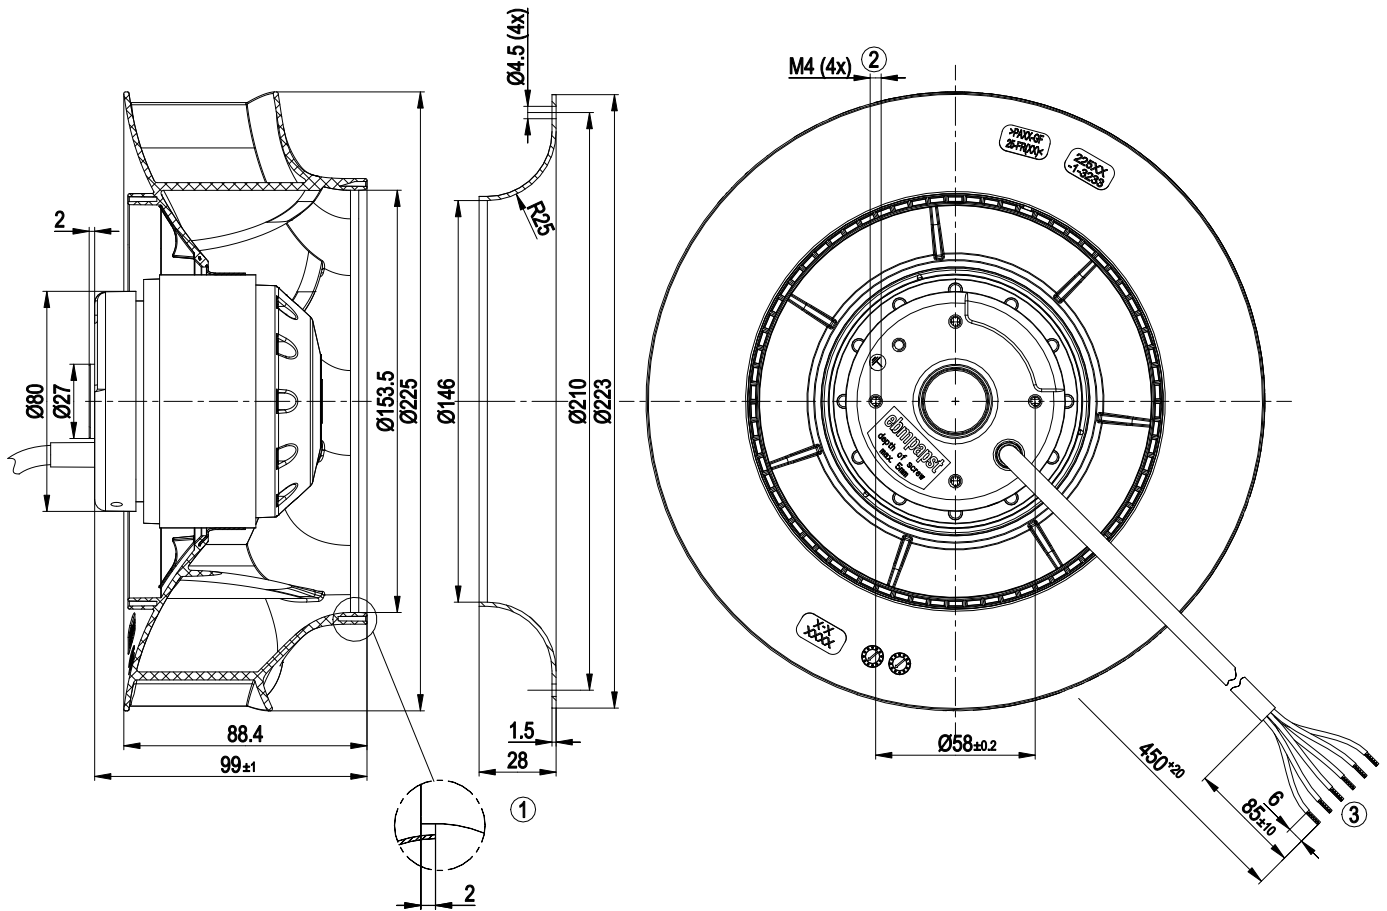

| | |
|---|---|
| 1 | Accessory part: inlet ring 96358-2-4013 not included in scope of delivery |
| 2 | Max. clearance for screw 5 mm |
| 3 | Cable silicone 6G 0.5 mm ² , 6x crimped splices |


Connection diagram



| | | | | | |
|----|--------------|-----|-------------|----|-----------------|
| L1 | = U1 = black | L2 | = V1 = blue | L3 | = W1 = brown |
| PE | green/yellow | TOP | 2x gray | Y | Star connection |



Curves: Air performance 50 Hz

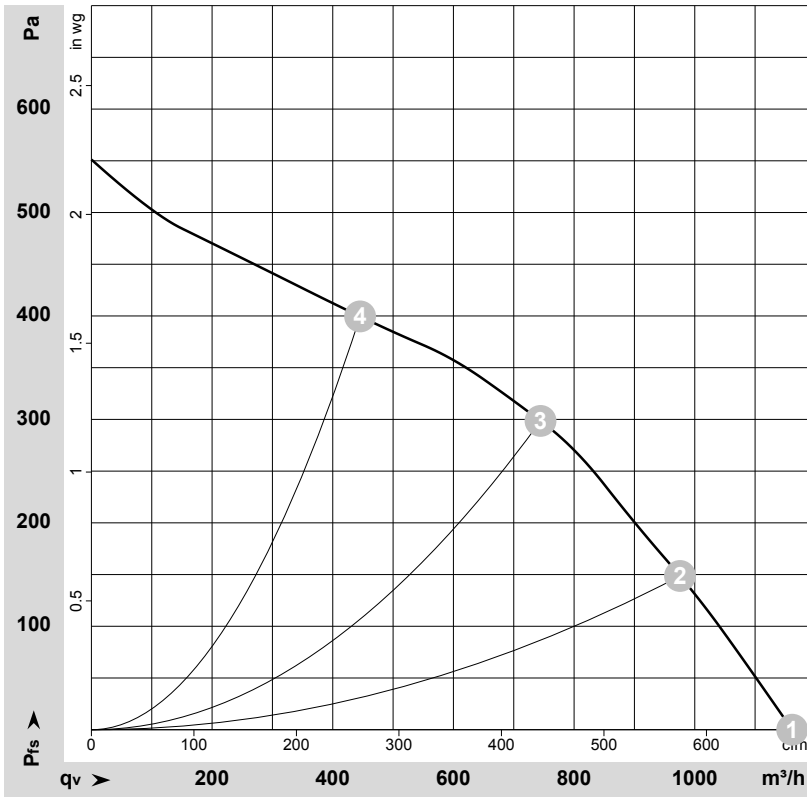

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-140430-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.


Measured values

| | Wired | U | f | n | P_e | I | LpA_{in} | LwA_{in} | q_v | P_{fs} | q_v | P_{fs} |
|---|-------|-----|----|-------------------|-------|------|------------|------------|-----------------------|----------|-------|----------|
| | | V | Hz | min^{-1} | W | A | dB(A) | dB(A) | m^3/h | Pa | cfm | in. wg |
| 1 | Y | 400 | 50 | 2645 | 122 | 0.24 | 66 | 74 | 1160 | 0 | 685 | 0.00 |
| 2 | Y | 400 | 50 | 2560 | 142 | 0.26 | 62 | 69 | 975 | 150 | 575 | 0.60 |
| 3 | Y | 400 | 50 | 2530 | 150 | 0.27 | 57 | 65 | 745 | 300 | 440 | 1.20 |
| 4 | Y | 400 | 50 | 2595 | 130 | 0.24 | 61 | 69 | 445 | 400 | 260 | 1.61 |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · P_{fs} = Pressure increase



Curves: Air performance 60 Hz

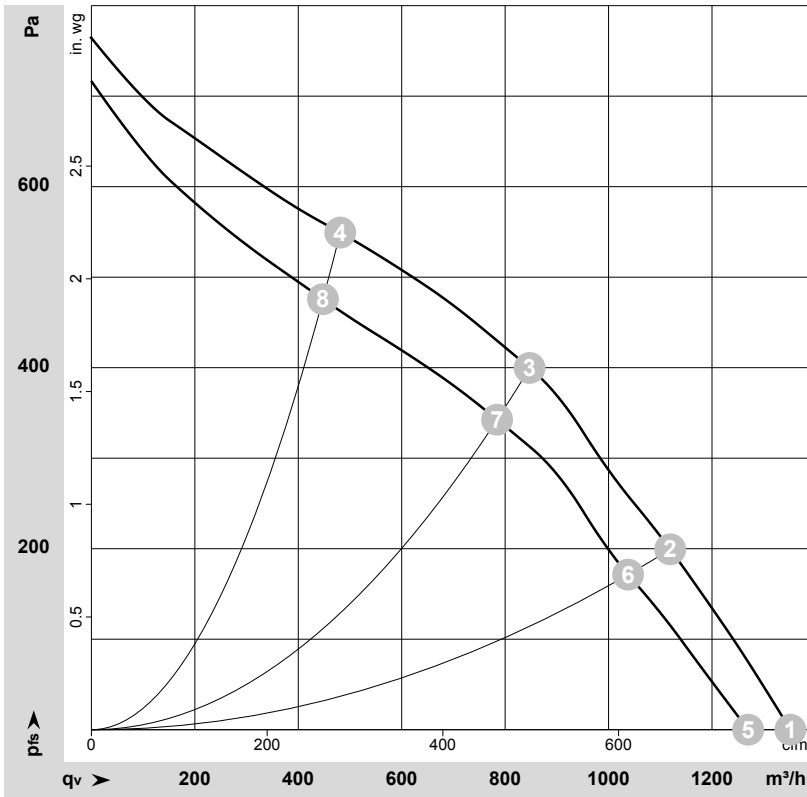

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-140437-1
Measurement: LU-140433-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | Wired | U | f | n | P _e | I | LpA _{in} | LwA _{in} | q _v | P _{fs} | q _v | P _{fs} |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
| | | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | in. wg |
| 1 | Y | 480 | 60 | 3065 | 192 | 0.28 | 70 | 78 | 1350 | 0 | 795 | 0.00 |
| 2 | Y | 480 | 60 | 2935 | 226 | 0.32 | 66 | 74 | 1120 | 200 | 660 | 0.80 |
| 3 | Y | 480 | 60 | 2900 | 235 | 0.32 | 61 | 69 | 845 | 400 | 500 | 1.61 |
| 4 | Y | 480 | 60 | 3025 | 202 | 0.29 | 65 | 74 | 480 | 550 | 285 | 2.21 |
| 5 | Y | 400 | 60 | 2880 | 171 | 0.28 | | | 1270 | 0 | 745 | 0.00 |
| 6 | Y | 400 | 60 | 2720 | 198 | 0.32 | | | 1040 | 171 | 610 | 0.69 |
| 7 | Y | 400 | 60 | 2700 | 200 | 0.33 | | | 785 | 343 | 460 | 1.38 |
| 8 | Y | 400 | 60 | 2810 | 180 | 0.29 | | | 450 | 476 | 265 | 1.91 |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase

