

# AC centrifugal fan

backward curved, single inlet  
for solid fuel heating systems

R2E150-AN89-09 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Mulfingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
County court Stuttgart · HRB 590142

## Nominal data

<b>Type</b>	<b>R2E150-AN89-09</b>	
<b>Motor</b>	<b>M2E068-BF</b>	
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	60
Type of data definition		fa
Valid for approval / standard		CE
Speed	min <sup>-1</sup>	2550
Power input	W	33
Current draw	A	0.3
Motor capacitor	µF	3
Capacitor voltage	VDB	220
Min. back pressure	Pa	0
Max. ambient temperature	°C	80

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations



# AC centrifugal fan

backward curved, single inlet  
for solid fuel heating systems

## Technical features


<b>Mass</b>	1.7 kg
<b>Size</b>	150 mm
<b>Surface of rotor</b>	Uncoated
<b>Material of impeller</b>	Sheet steel, stainless
<b>Number of blades</b>	6
<b>Direction of rotation</b>	Counter-clockwise, seen on rotor
<b>Type of protection</b>	IP 44; Depending on installation and position
<b>Insulation class</b>	"B"
<b>Humidity class</b>	F0
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Any
<b>Condensate discharge holes</b>	None
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	< 0.75 mA
<b>Motor protection</b>	Thermal overload protector (TOP) wired internally
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 60335-1; CE
<b>Approval</b>	UL 2111; CSA C22.2 Nr.77



# AC centrifugal fan


backward curved, single inlet  
for solid fuel heating systems

## Product drawing

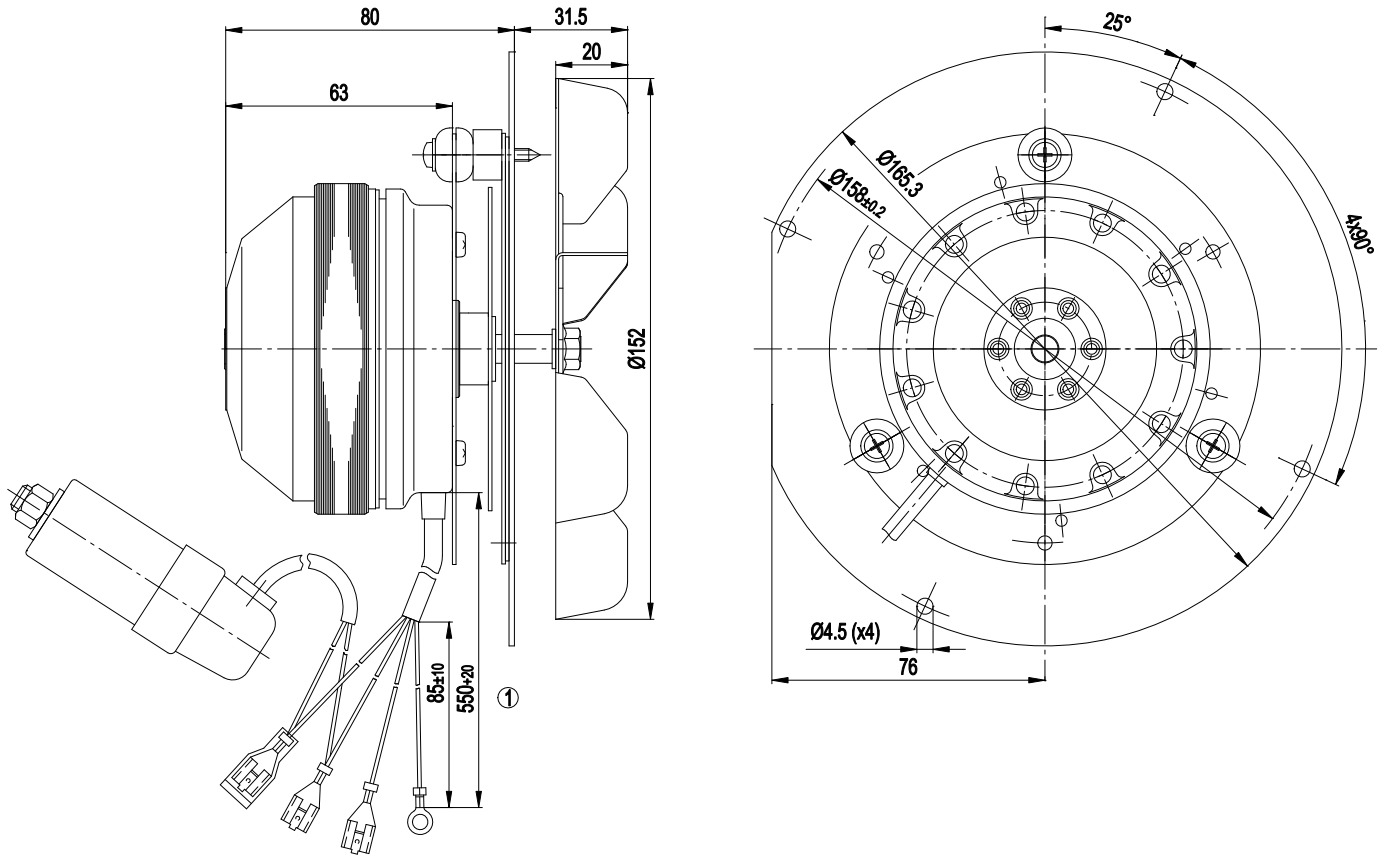

1 Connection line PFA AWG20; 1x core-end sleeve, 1x brass lead tip and 1x receptacle for tabs 6.3 x 0.8 with housing, crimped

## Connection screen

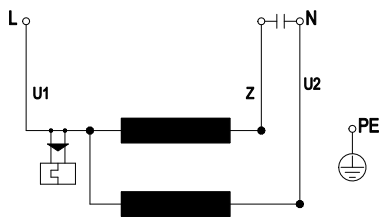


U1	blue	Z	brown	U2	black
PE	green/yellow				



# AC centrifugal fan

backward curved, single inlet  
for solid fuel heating systems

## Charts: Air flow 60 Hz

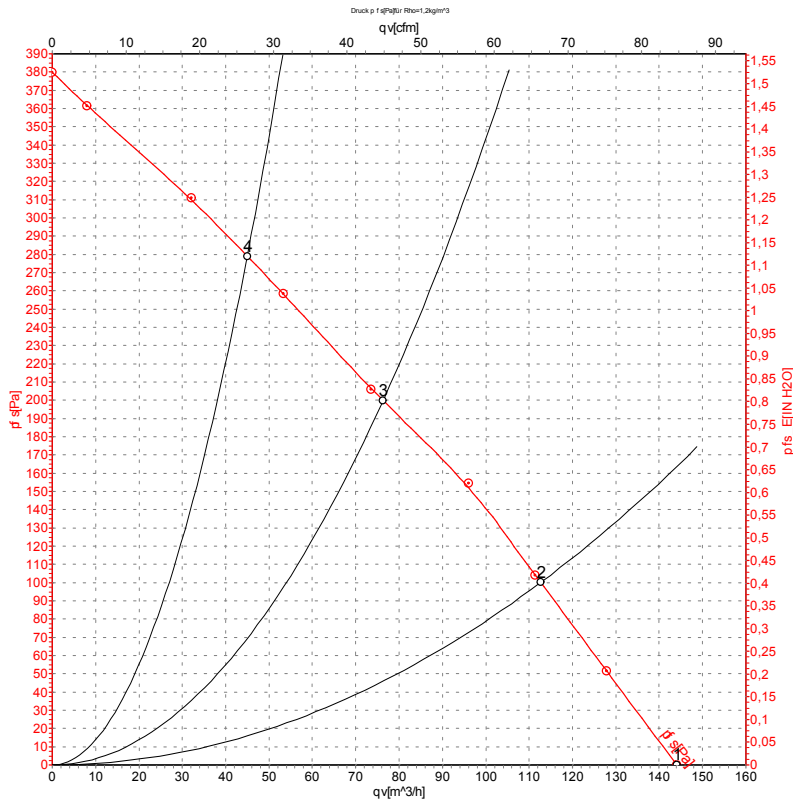

Measurement: LU-13862

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L<sub>wA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>e</sub>	I	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa
1	115	60	2550	33	0.30	145	0
2	115	60	2635	32	0.28	115	100
3	115	60	2755	31	0.27	75	200
4	115	60	2865	30	0.26	45	280

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · P<sub>fs</sub> = Pressure increase

