

R2E180-CP52-10 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	R2E180-CP52-10	
Motor	M2E068-DF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Type of data definition		cu
Valid for approval / standard		CE
Speed	min ⁻¹	2650
Power input	W	115
Current draw	A	0.51
Motor capacitor	µF	3
Capacitor voltage	VDB	450
Capacitor standard		P0 (CE)
Min. back pressure	Pa	600
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	35
Starting current	A	1.25

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations




Technical features

Mass	1.2 kg
Size	180 mm
Material of impeller	Sheet steel, galvanised
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"F"
Humidity class	F0
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	VDE

AC centrifugal fan

forward curved, single inlet


Product drawing

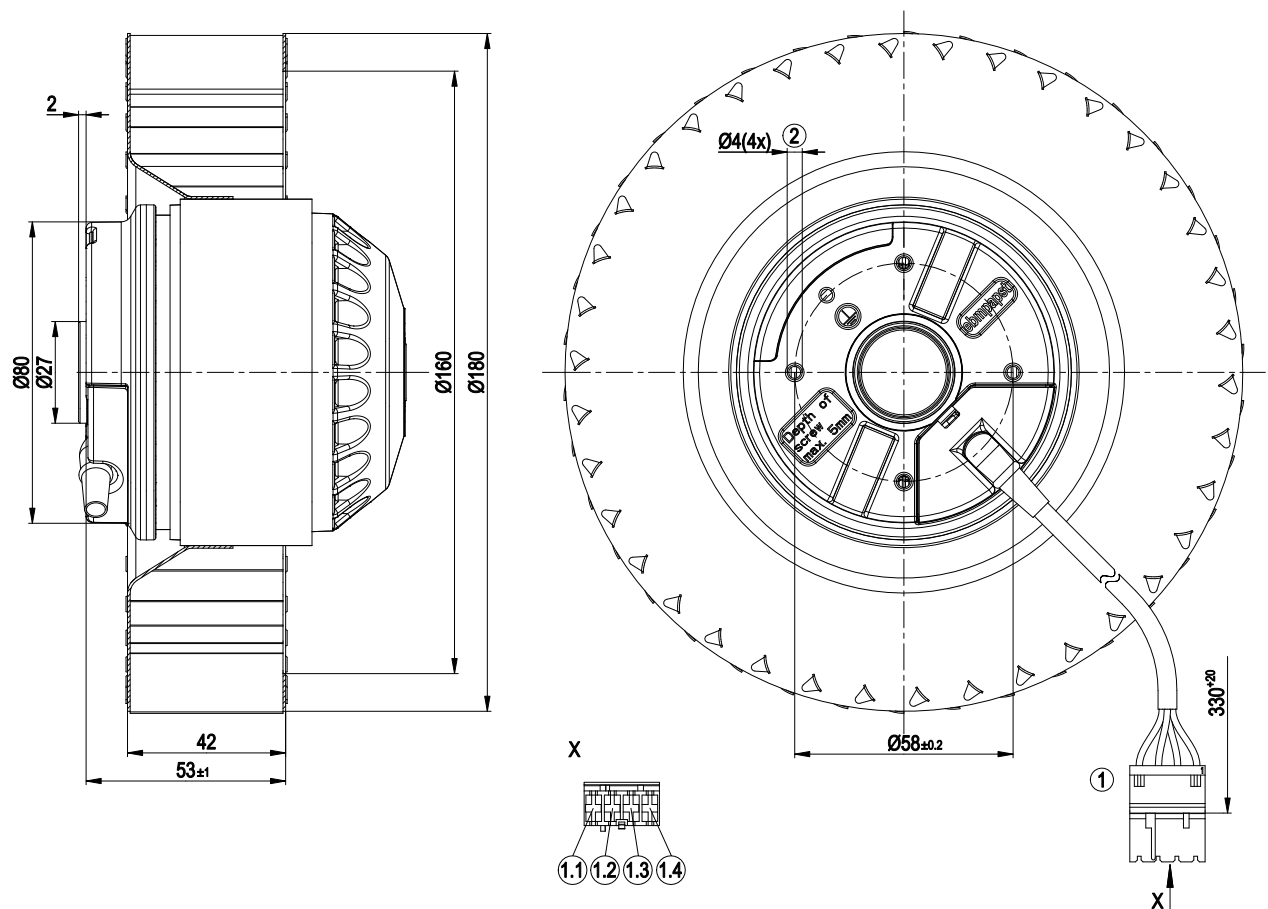

1	Connection line PVC 4G 0.5mm ² , AMP connector shell 0-1241981-4 with 4x female terminal 926965-1
1.1	green / yellow
1.2	Blue
1.3	black
1.4	brown
2	Depth of screw max. 5 mm



Connection screen




U1	blue	Z	brown	U2	black
PE	green/yellow				



AC centrifugal fan
forward curved, single inlet

Charts: Air flow 50 Hz

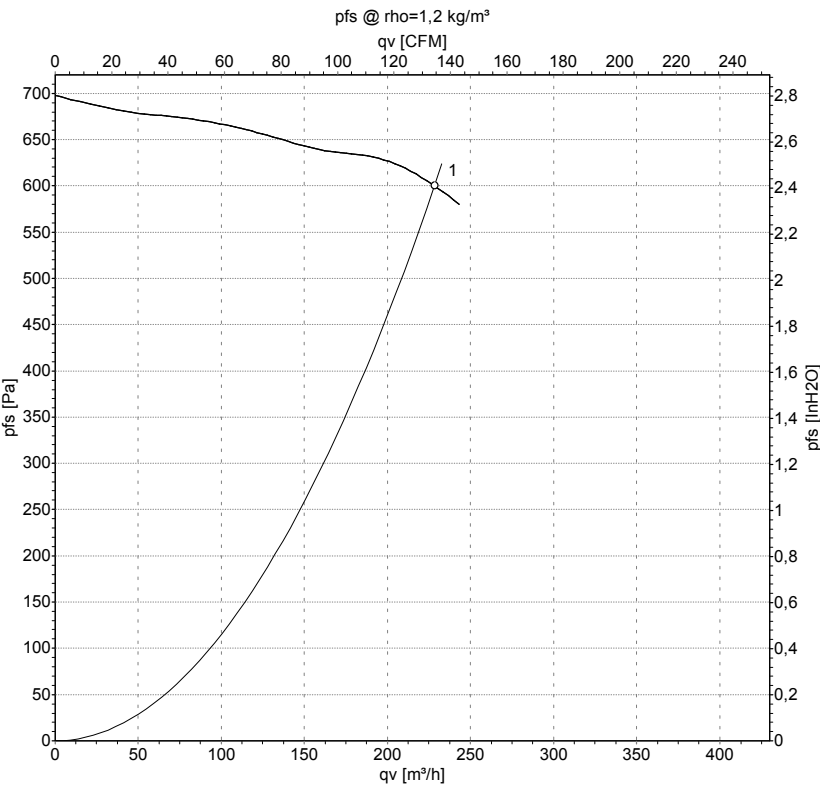

Measurement: LU-128706

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2650	115	0.51	220	600

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

