

R2E270-AA01-13 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142

Nominal data

| Type | R2E270-AA01-13 | | | |
|-------------------------------|-------------------|------|------|------|
| Motor | M2E074-GA | | | |
| Phase | | 1~ | 1~ | 1~ |
| Nominal voltage | VAC | 230 | 230 | 230 |
| Frequency | Hz | 50 | 60 | 60 |
| Type of data definition | | fa | fa | fa |
| Valid for approval / standard | | - | - | UL |
| Speed | min ⁻¹ | 2750 | 3100 | 3100 |
| Power input | W | 280 | 430 | 450 |
| Current draw | A | 1.23 | 1.88 | |
| Motor capacitor | µF | 10 | 10 | 10 |
| Capacitor voltage | VDB | 400 | 400 | 400 |
| Capacitor standard | | | | UL |
| Min. back pressure | Pa | 0 | 0 | 0 |
| Min. ambient temperature | °C | -25 | -25 | -25 |
| Max. ambient temperature | °C | 60 | 50 | 50 |
| Starting current | A | 3.0 | 3.0 | |


ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features


| | |
|--|---|
| Mass | 4.7 kg |
| Size | 270 mm |
| Surface of rotor | Coated in black |
| Material of impeller | Aluminium sheet |
| Number of blades | 11 |
| Direction of rotation | Clockwise, seen on rotor |
| Type of protection | IP 44; Depending on installation and position |
| Insulation class | "F" |
| Humidity class | F1-2 |
| Max. permissible ambient motor temp. (transp./ storage) | + 80 °C |
| Min. permissible ambient motor temp. (transp./storage) | - 40 °C |
| Mounting position | Any |
| Condensate discharge holes | None |
| Operation mode | S1 |
| Motor bearing | Ball bearing |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Cable exit | Variable |
| Protection class | I (if protective earth is connected by customer) |
| Product conforming to standard | EN 60335-1 |
| Approval | UL 1004-1; CSA C22.2 Nr.100 |

Product drawing

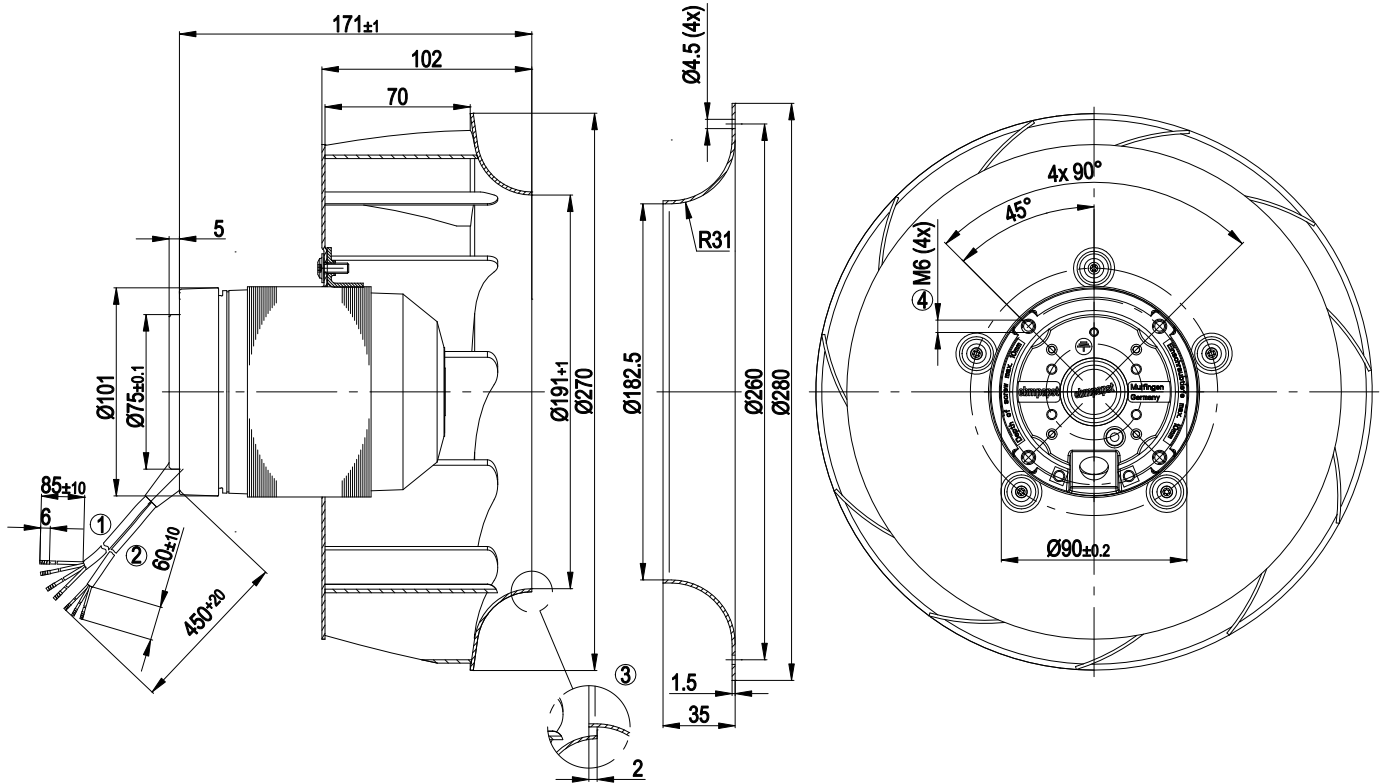


| | |
|---|---|
| 1 | Connection line PFA 4G AWG20, 4x brass lead tips crimped |
| 2 | Connection line for Hall IC 3X AWG26, 3 x brass lead tips crimped |
| 3 | Accessory part: Inlet nozzle 96360-2-4013, not included in the standard scope of delivery |
| 4 | Depth of screw max. 10 mm |

Connection screen

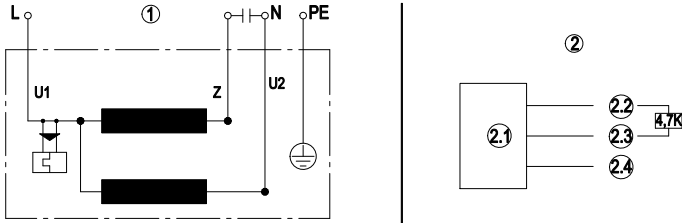

| | |
|-----|------------------------|
| 1 | Fan connection diagram |
| U1 | Blue |
| Z | brown |
| U2 | black |
| PE | green/yellow |
| 2 | Hall IC circuit |
| 2.1 | Hall IC |
| 2.2 | Red (+5V) |
| 2.3 | White (out) |
| 2.4 | Black (0V) |

Charts: Air flow 50 Hz

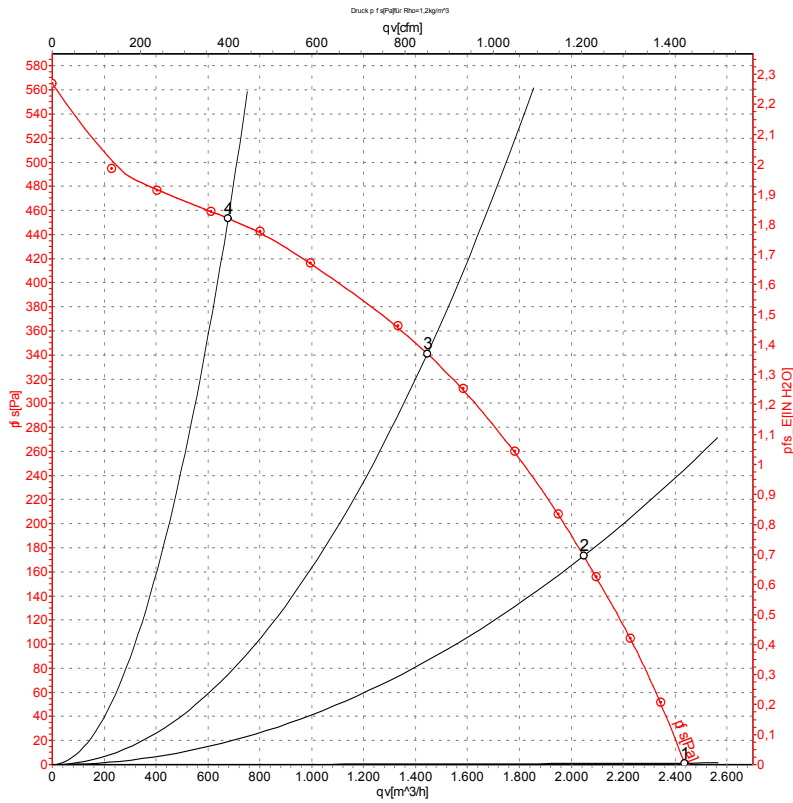

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.


Measured values

| | U | f | n | P _e | I | qv | P _{fs} |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa |
| 1 | 230 | 50 | 2750 | 280 | 1.23 | 2435 | 0 |
| 2 | 230 | 50 | 2680 | 337 | 1.46 | 2050 | 175 |
| 3 | 230 | 50 | 2635 | 363 | 1.58 | 1445 | 340 |
| 4 | 230 | 50 | 2730 | 305 | 1.33 | 680 | 450 |

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase



Charts: Air flow 60 Hz

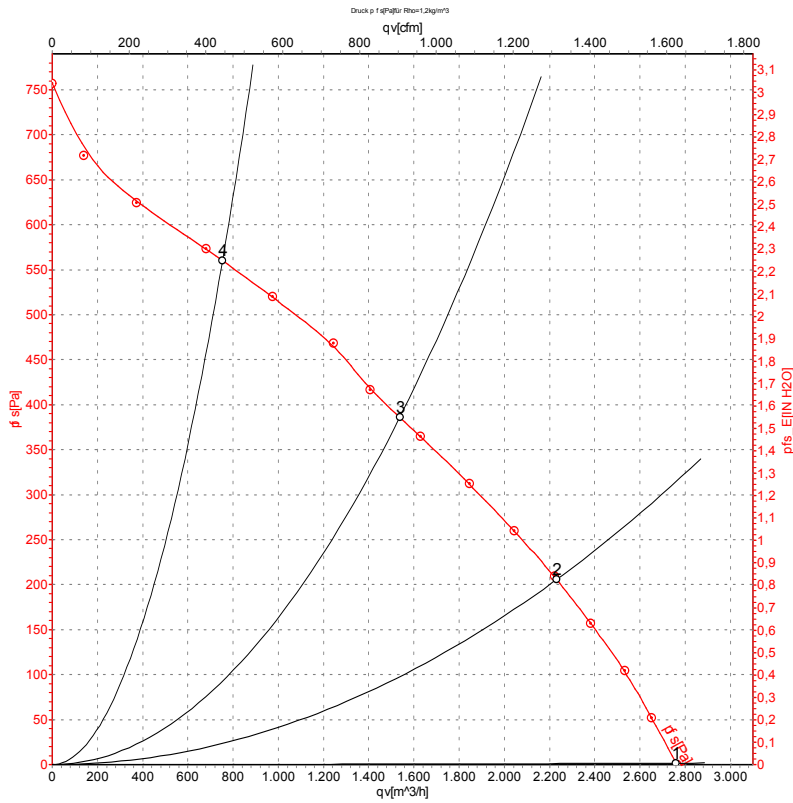

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _e | I | qv | P _{fs} |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa |
| 1 | 230 | 60 | 3100 | 430 | 1.88 | 2760 | 0 |
| 2 | 230 | 60 | 2920 | 494 | 2.16 | 2230 | 200 |
| 3 | 230 | 60 | 2800 | 520 | 2.26 | 1540 | 390 |
| 4 | 230 | 60 | 3035 | 457 | 2.02 | 755 | 560 |

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase

