

R3G140-AF17-14 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

Type	R3G140-AF17-14	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min <sup>-1</sup>	1880
Power input	W	84
Current draw	A	0.74
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60


ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



### Technical features


Mass	1.2 kg
Size	140 mm
Surface of rotor	Thick layer passivated
Material of electronics housing	Die-cast aluminium
Material of impeller	PP plastic
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Output limit</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage detection</li> </ul>
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Locked-rotor protection
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE

## Product drawing

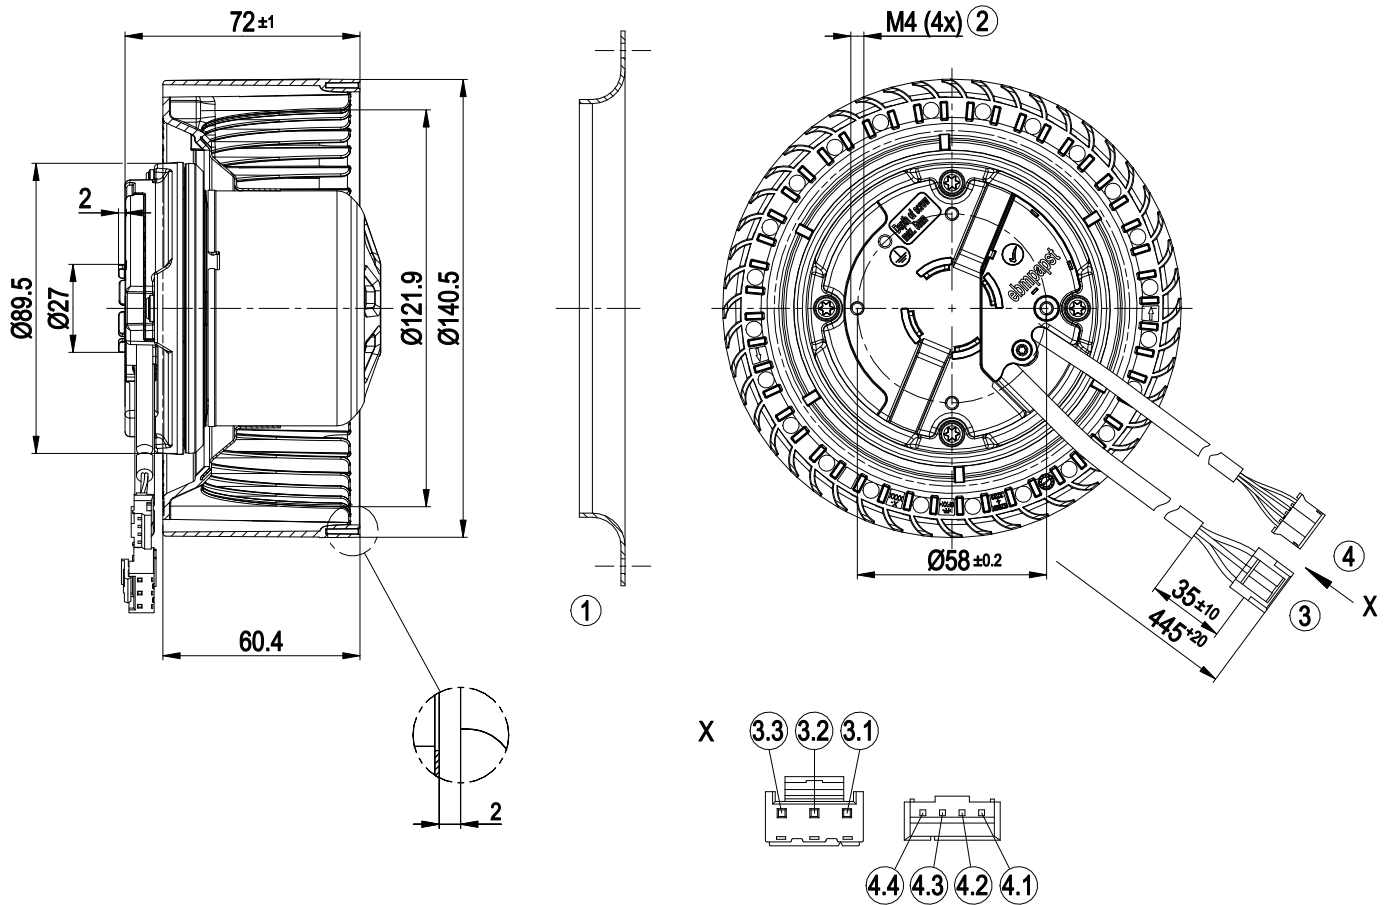


1	Accessory part: Inlet nozzle: 09576-2-4013 not included in scope of delivery
2	Thread reach max. 5 mm
3	Connection line PVC AWG20, 1x connector housing 3-pole JST NVR-03, 3x female connector JST SVH-21T-P1.1 crimped
3.1	black
3.2	green/yellow
3.3	blue
4	Connection line PVC AWG22, 1x connector housing 4-pole JST PHR-4, 4x female connector JST SPH-002T-P0.5S crimped
4.1	red
4.2	blue
4.3	yellow
4.4	white

## Accessory part

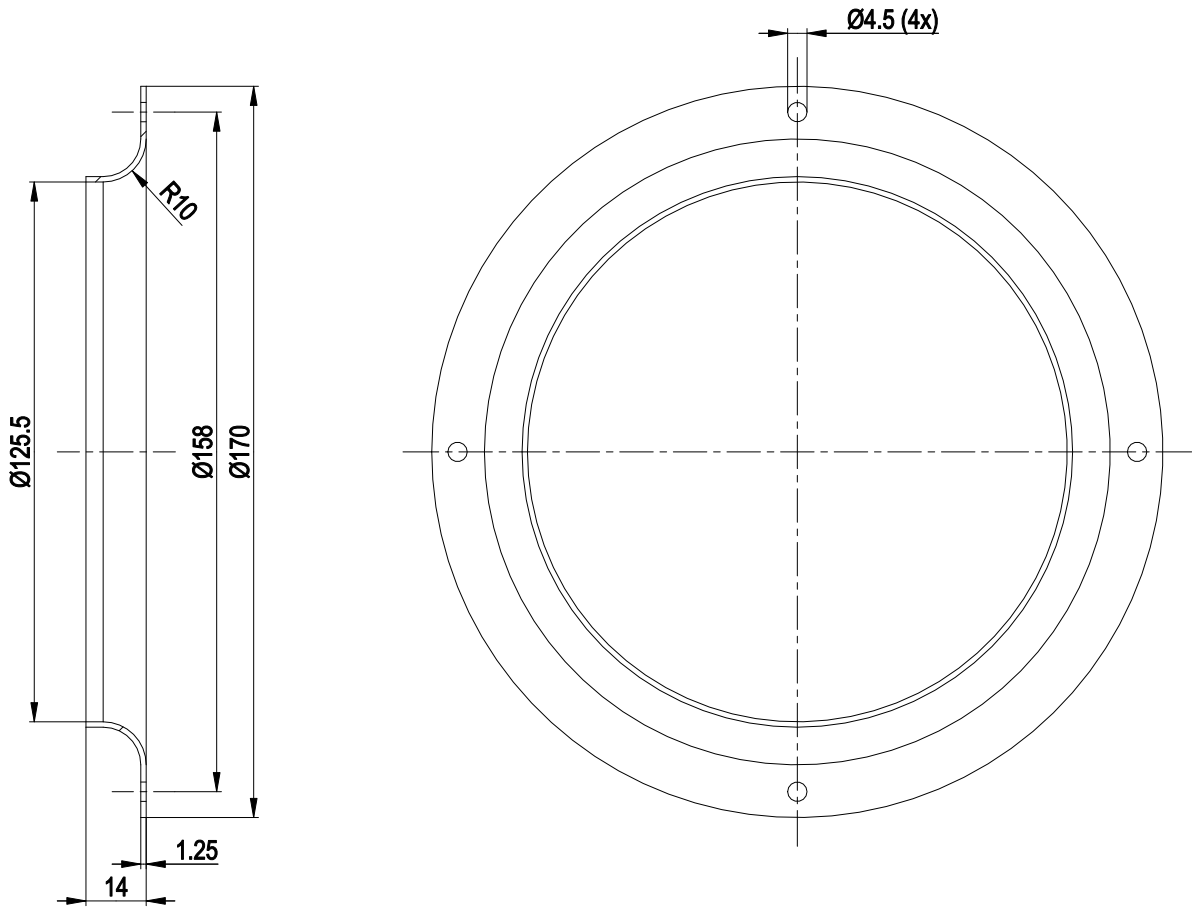


1 Accessory part: Inlet nozzle 09576-2-4013 not included in scope of delivery

## Connection screen

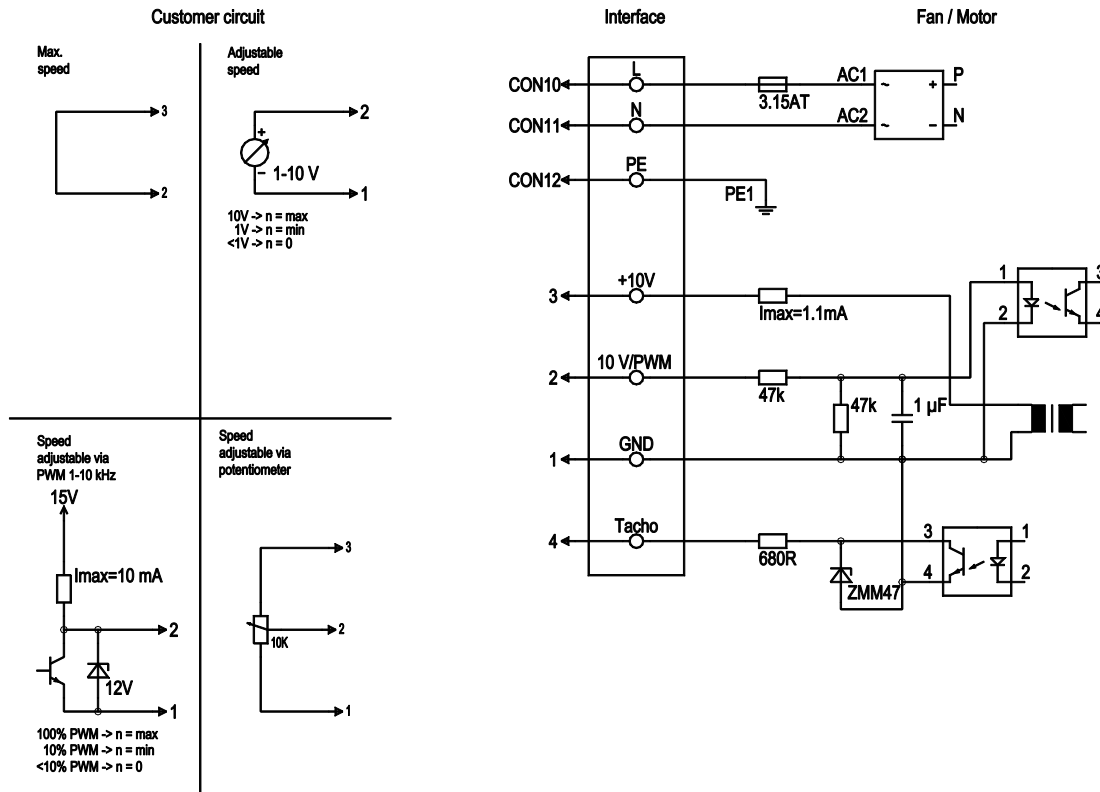

No.	Conn.	Designation	Colour	Function / assignment
	CON10	L	black	Power supply 230 VAC, 50-60 Hz, see type plate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND connection for control interface
	2	0-10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	3	10 V / max. 1,1 mA	red	Voltage output 10 VDC 1.1 mA, electrically isolated, short-circuit-proof
	4	Tacho	white	Tach output: Open collector, 1 pulse per revolution, electrically isolated

## Charts: Air flow 50 Hz

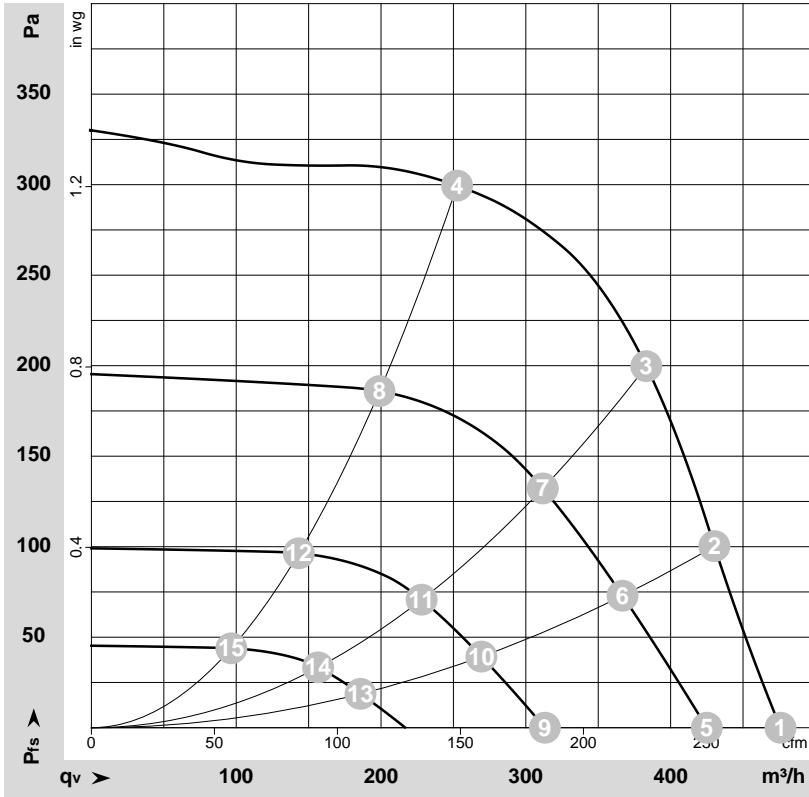

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-172359-1  
 Measurement: LU-173591-1  
 Measurement: LU-173593-1  
 Measurement: LU-173595-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	230	50	1880	84	0.74	65	72	475	0	280	0.00
2	230	50	2045	84	0.74	64	71	430	100	255	0.40
3	230	50	2205	81	0.71	63	70	385	200	225	0.80
4	230	50	2370	58	0.55	60	67	255	300	150	1.20
5	230	50	1680	62	0.57	62	69	425	0	250	0.00
6	230	50	1740	52	0.50	60	67	365	76	215	0.31
7	230	50	1795	43	0.43	58	65	310	137	185	0.55
8	230	50	1880	30	0.32	54	61	200	187	115	0.75
9	230	50	1235	27	0.28	55	61	315	0	185	0.00
10	230	50	1270	23	0.24	52	59	270	41	160	0.16
11	230	50	1300	19	0.21	49	57	230	74	135	0.30
12	230	50	1355	14	0.16	46	53	145	97	85	0.39
13	230	50	880	10.0	0.12	42	50	185	20	110	0.08
14	230	50	905	9.0	0.11	40	48	155	35	90	0.14
15	230	50	940	7.0	0.09	36	45	95	44	55	0.18

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · q<sub>v</sub> = Air flow  
 P<sub>fs</sub> = Pressure increase

