

# EC centrifugal fan

forward curved



R3G140-AH13-10 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G140-AH13-10    |            |
| Motor                    | M3G055-DF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 1800       |
| Power input              | W                 | 85         |
| Current draw             | A                 | 0.73       |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations




## Technical features

|                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 1.35 kg                                                                                                                                                                                                                                                                                                                                                                                                    |
| Size                                                               | 140 mm                                                                                                                                                                                                                                                                                                                                                                                                     |
| Surface of rotor                                                   | Thick layer passivated                                                                                                                                                                                                                                                                                                                                                                                     |
| Material of electronics housing                                    | Die-cast aluminium                                                                                                                                                                                                                                                                                                                                                                                         |
| Material of impeller                                               | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                 |
| Direction of rotation                                              | Clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                   |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                                                                                                                      |
| Insulation class                                                   | "B"                                                                                                                                                                                                                                                                                                                                                                                                        |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                                                                                                                                                                                                                                                                                                                                                                    |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                    |
| Mounting position                                                  | Any                                                                                                                                                                                                                                                                                                                                                                                                        |
| Condensate discharge holes                                         | None, open rotor                                                                                                                                                                                                                                                                                                                                                                                           |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                                                                                         |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                               |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Tach output</li> <li>- Output limit</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage detection</li> </ul> |
| EMC interference immunity                                          | Acc. to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                              |
| EMC harmonics                                                      | Acc. to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                     |
| EMC interference emission                                          | Acc. to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                               |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                  |
| Electrical leads                                                   | With plug                                                                                                                                                                                                                                                                                                                                                                                                  |
| Motor protection                                                   | Locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                    |
| Cable exit                                                         | Variable                                                                                                                                                                                                                                                                                                                                                                                                   |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                                                                           |
| Product conforming to standard                                     | EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                             |
| Approval                                                           | VDE                                                                                                                                                                                                                                                                                                                                                                                                        |

# EC centrifugal fan

forward curved

Product drawing

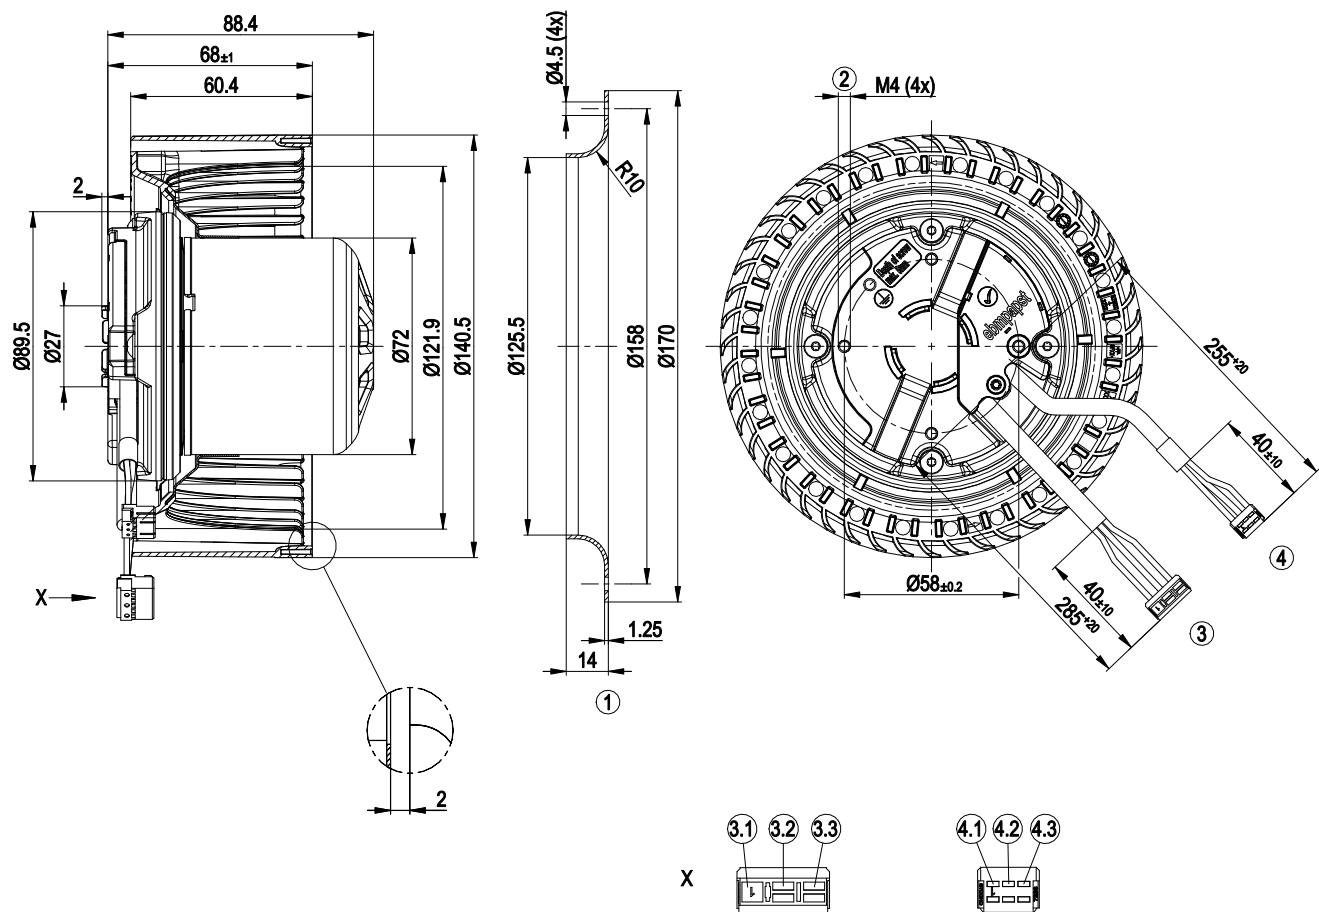


|     |                                                                                              |
|-----|----------------------------------------------------------------------------------------------|
| 1   | Accessory part: Inlet nozzle: 09576-2-4013 not included in scope of delivery                 |
| 2   | Thread reach max. 5 mm                                                                       |
| 3   | Connection line PVC AWG20, 1x connector housing 3-pole Stocko MFMP 7262-003-002-960-000-00-G |
| 3.1 | black                                                                                        |
| 3.2 | blue                                                                                         |
| 3.3 | green/yellow                                                                                 |
| 4   | Connection line PVC AWG22, 1x connector housing 3-pole Stocko MFMP 7238-003-070-960-000-00-G |
| 4.1 | white                                                                                        |
| 4.2 | yellow                                                                                       |
| 4.3 | blue                                                                                         |



# EC centrifugal fan

forward curved


Connection screen

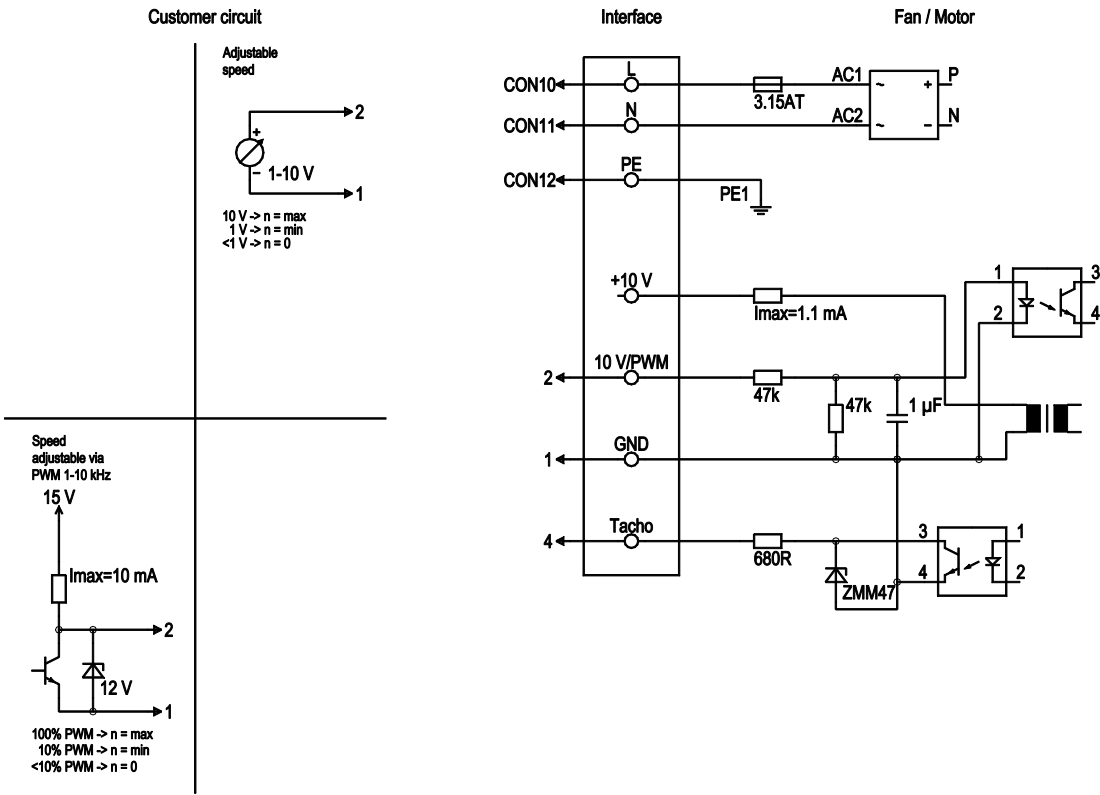

| No. | Conn. | Designation | Colour       | Function / assignment                                                                       |
|-----|-------|-------------|--------------|---------------------------------------------------------------------------------------------|
|     | CON10 | L           | black        | Power supply 230 VAC, 50-60 Hz, see type plate for voltage range                            |
|     | CON11 | N           | blue         | Neutral conductor                                                                           |
|     | CON12 | PE          | green/yellow | Protective earth                                                                            |
|     | 1     | GND         | blue         | GND connection for control interface                                                        |
|     | 2     | 0-10V PWM   | yellow       | Control input 0-10 V or PWM, electrically isolated                                          |
|     | 4     | Tacho       | white        | Tach output: open collector, 1 pulse per revolution, electrically isolated, Isink_max=10 mA |



Charts: Air flow 50 Hz

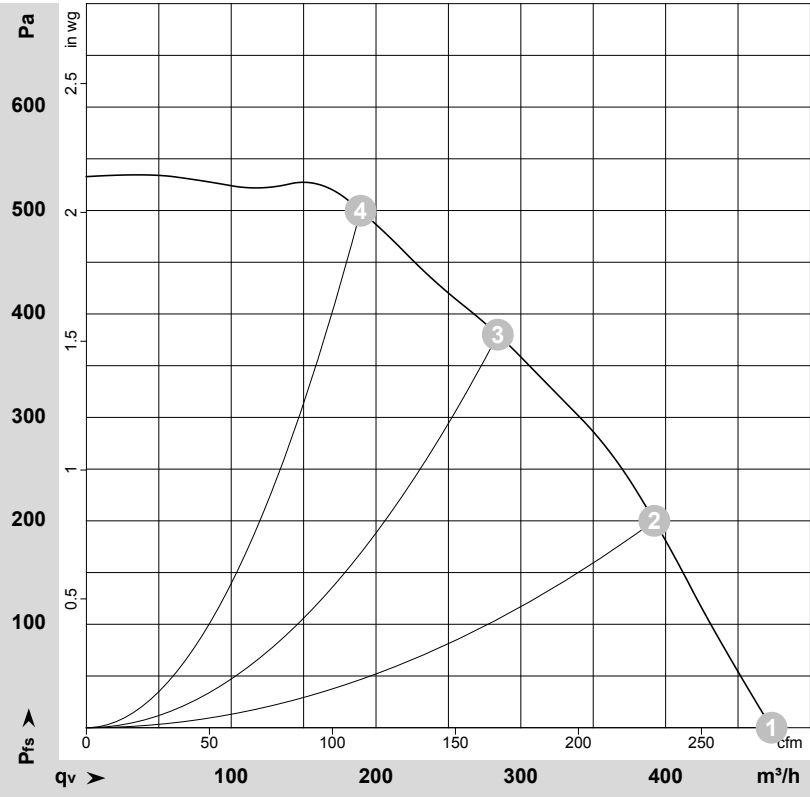

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-168962-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

|   | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | inH2O           |
| 1 | 230 | 50 | 1800              | 85              | 0.73 | 64                | 71                | 475            | 0               | 280            | 0.00            |
| 2 | 230 | 50 | 2155              | 85              | 0.73 | 63                | 70                | 390            | 200             | 230            | 0.80            |
| 3 | 230 | 50 | 2660              | 85              | 0.73 | 64                | 70                | 285            | 380             | 165            | 1.53            |
| 4 | 230 | 50 | 3175              | 85              | 0.73 | 67                | 74                | 190            | 500             | 110            | 2.01            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · q<sub>v</sub> = Air flow  
p<sub>fs</sub> = Pressure increase

