

EC centrifugal fan

forward curved, single inlet



R3G140-AV03-19 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	R3G140-AV03-19	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		fa
Speed (rpm)	min ⁻¹	1800
Power input	W	66
Current draw	A	0.5
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	1.2 kg
Size	140 mm
Surface of rotor	Thick layer passivated
Material of electronics housing	Die-cast aluminium
Material of impeller	Sheet steel, galvanised
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44
Insulation class	"B"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	EAC

EC centrifugal fan

forward curved, single inlet

Product drawing

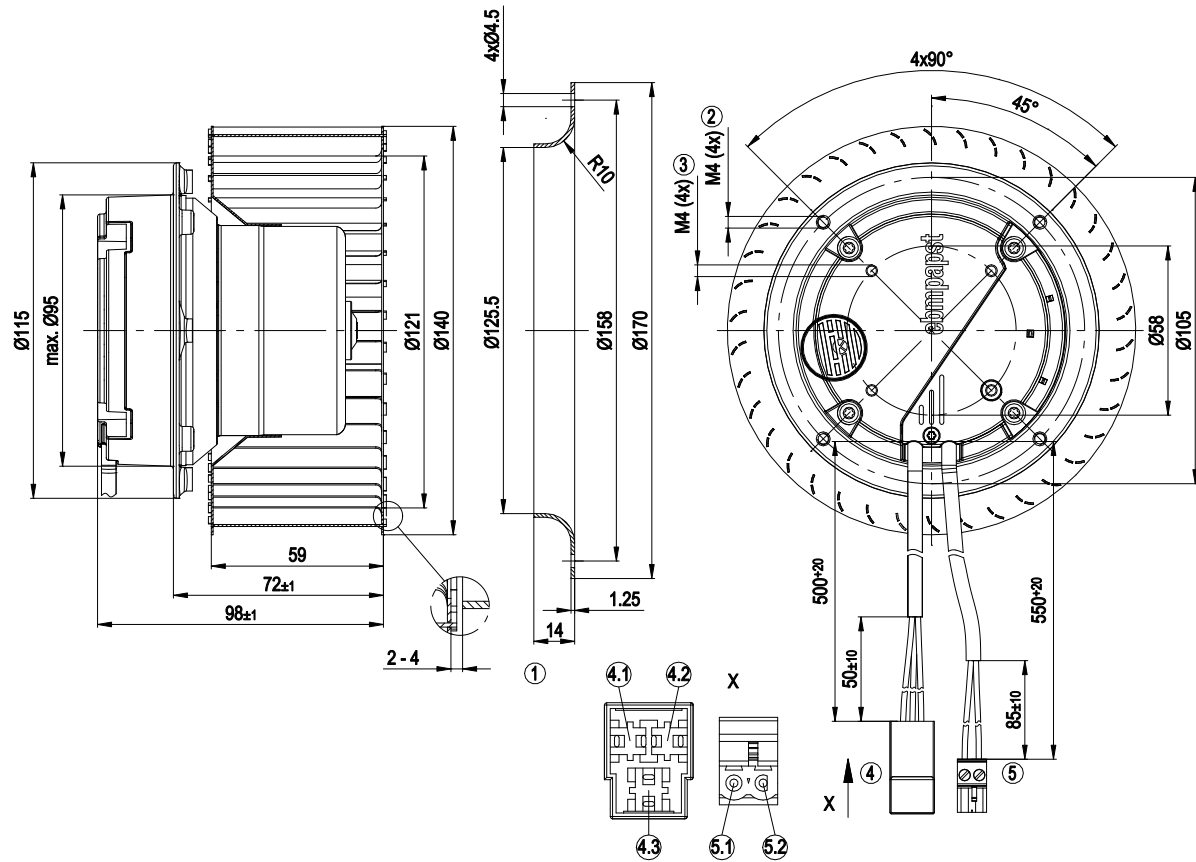


1	Accessory part: Inlet nozzle 09576-2-4013, not included in the standard scope of delivery
2	Depth of screw max. 6 mm
3	Depth of screw max. 6 mm
4	Connection line PVC 3G 0.5 mm ² with connector shell Stocko W 2027.100-G
4.1	blue = N
4.2	brown = L
4.3	green/yellow = PE
5	Control cable PVC 4 x 0.25 mm ² with plug PHOENIX MSTB 2.5/2-ST-5.08
5.1	yellow = 0 - 10V PWM
5.2	blue = GND

EC centrifugal fan

forward curved, single inlet


Connection screen

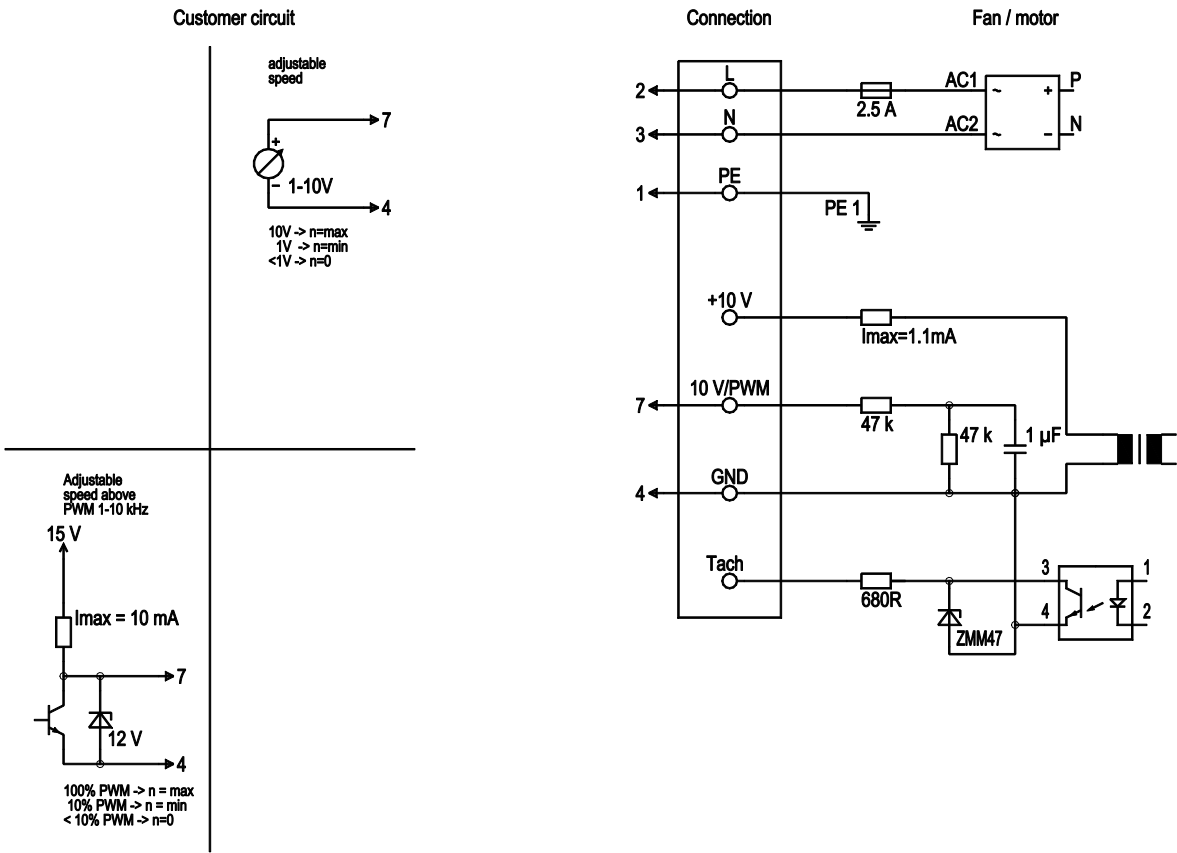

No.	Conn.	Designation	Colour	Function / assignment
	2	L	brown	Power supply 230 VAC, 50-60 Hz, see type plate for voltage range
	3	N	blue	Neutral conductor
	1	PE	green/yellow	Protective earth
	7	0-10 V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
	4	GND	blue	GND - Connection for control interface



Charts: Air flow 50 Hz

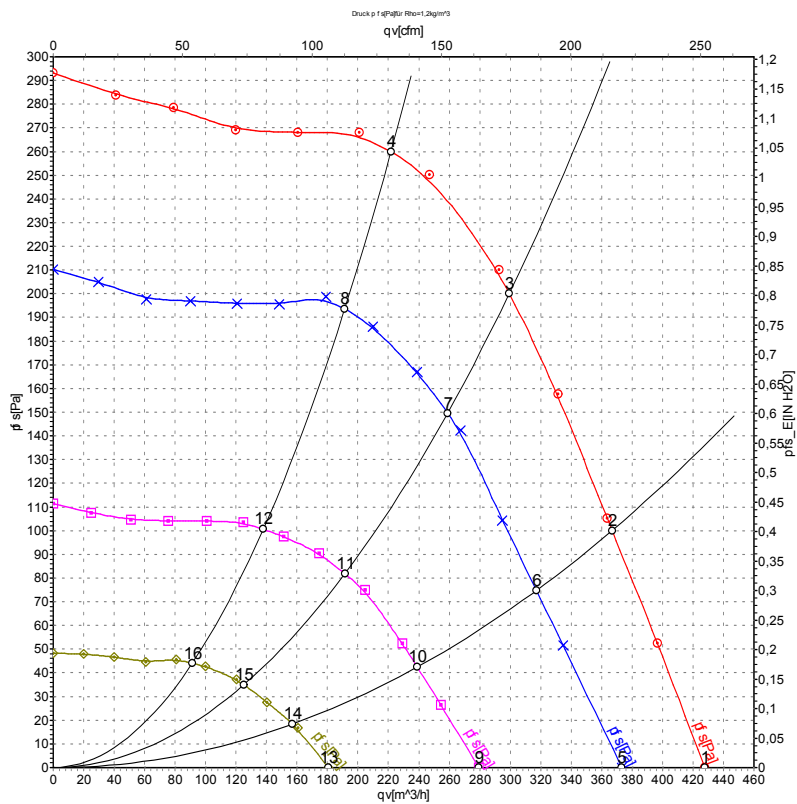

Measurement: LU-65700-1
 Measurement: LU-117046-1
 Measurement: LU-117047-1
 Measurement: LU-117050-1

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: L_{WA} measured as per ISO 13347 /
 L_{pA} measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	U	f	n	P _{ed}	I	q _V	p _{fs}	q _V	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	50	1800	66	0.50	430	0	250	0.00
2	230	50	1855	59	0.43	365	100	215	0.40
3	230	50	1960	50	0.36	300	200	175	0.80
4	230	50	2075	42	0.31	220	260	130	1.04
5	230	50	1580	46	0.35	375	0	220	0.00
6	230	50	1630	40	0.30	315	75	185	0.30
7	230	50	1710	34	0.26	260	150	150	0.60
8	230	50	1780	27	0.21	190	194	110	0.78
9	230	50	1195	22	0.17	280	0	165	0.00
10	230	50	1220	18	0.14	240	42	140	0.17
11	230	50	1265	16	0.13	190	82	115	0.33
12	230	50	1305	13	0.11	140	101	80	0.41
13	230	50	810	9.0	0.08	180	0	105	0.00
14	230	50	830	8.1	0.07	155	19	90	0.08
15	230	50	845	6.9	0.07	125	35	75	0.14
16	230	50	890	6.4	0.06	90	44	55	0.18

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase