

# EC centrifugal fan

forward curved, single inlet

R3G146-AC05-15 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G146-AC05-15    |            |
| Motor                    | M3G055-CF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 2000       |
| Power input              | W                 | 100        |
| Current draw             | A                 | 0.77       |
| Min. back pressure       | Pa                | 0          |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 55         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations




## Technical features

|                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 1.3 kg                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Size                                                               | 146 mm                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Surface of rotor                                                   | Thick layer passivated                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Material of impeller                                               | Sheet steel, galvanised                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                                                |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Insulation class                                                   | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Mounting position                                                  | Any                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Condensate discharge holes                                         | None, open rotor                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Tach output</li> <li>- Output limit</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage detection</li> </ul> |
| EMC interference immunity                                          | Acc. to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                   |
| EMC harmonics                                                      | Acc. to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                          |
| EMC interference emission                                          | Acc. to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                    |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Motor protection                                                   | Locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Cable exit                                                         | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                                                                                                                |
| Product conforming to standard                                     | EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                  |

# EC centrifugal fan


forward curved, single inlet

## Product drawing

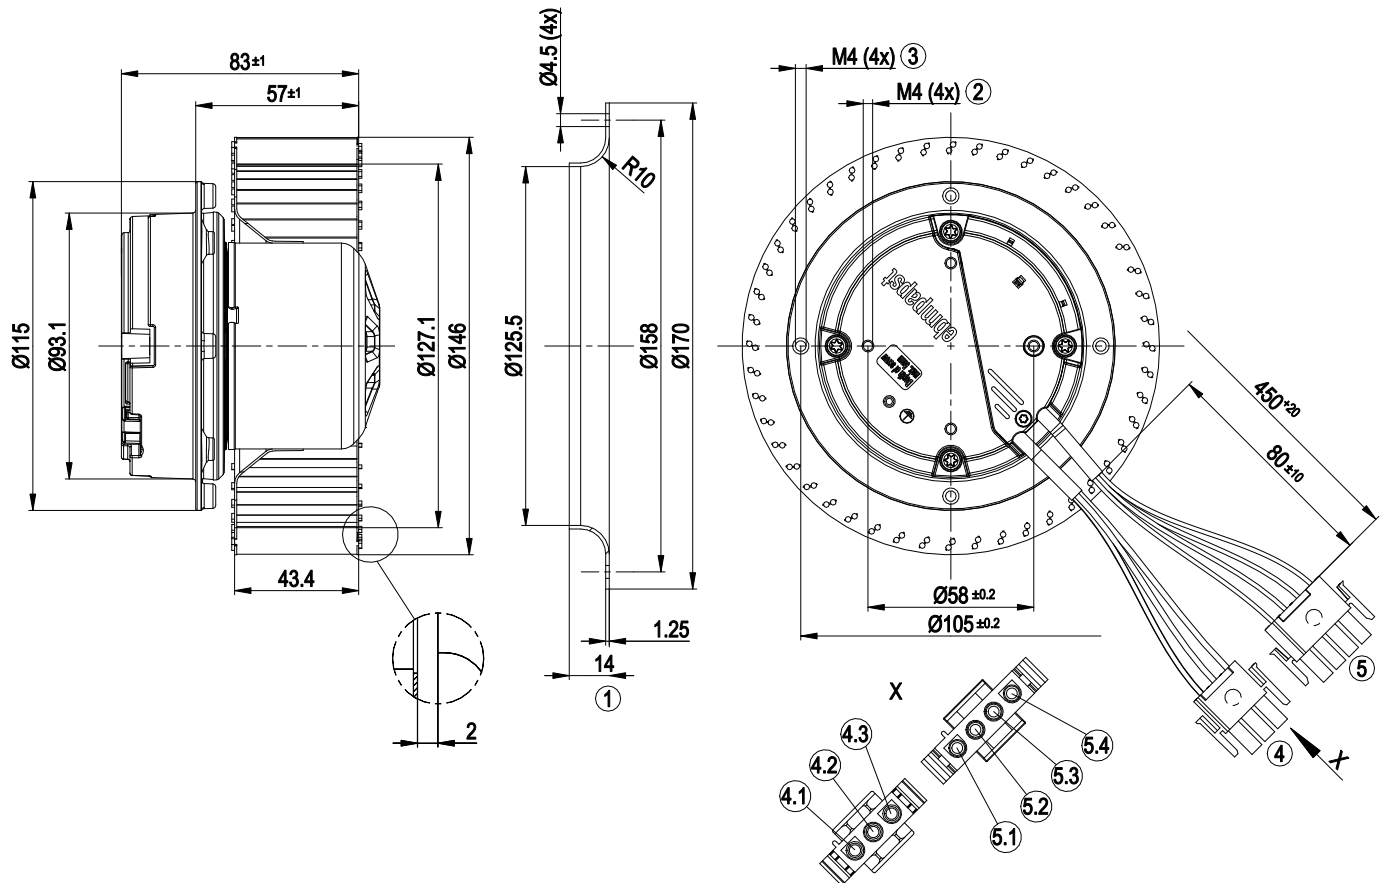

|     |                                                                                                                           |
|-----|---------------------------------------------------------------------------------------------------------------------------|
| 1   | Accessory part: Inlet nozzle 09576-2-4013 not included in scope of delivery                                               |
| 2   | Thread reach max. 6 mm                                                                                                    |
| 3   | Thread reach max. 6 mm                                                                                                    |
| 4   | Connection line PVC 3G 0.5 mm <sup>2</sup> , connector housing 3-pole tyco 1-480700-0, 3x plug pin tyco 926885-3 crimped  |
| 4.1 | L (brown)                                                                                                                 |
| 4.2 | N (blue)                                                                                                                  |
| 4.3 | PE (green/yellow)                                                                                                         |
| 5   | Connection line PVC 4x 0.25 mm <sup>2</sup> , connector housing 4-pole tyco 1-480702-0, 4x plug pin tyco 926885-3 crimped |
| 5.1 | +10 V (red)                                                                                                               |
| 5.2 | 0-10 V PWM (yellow)                                                                                                       |
| 5.3 | GND (blue)                                                                                                                |
| 5.4 | Tach (white)                                                                                                              |

## Connection screen

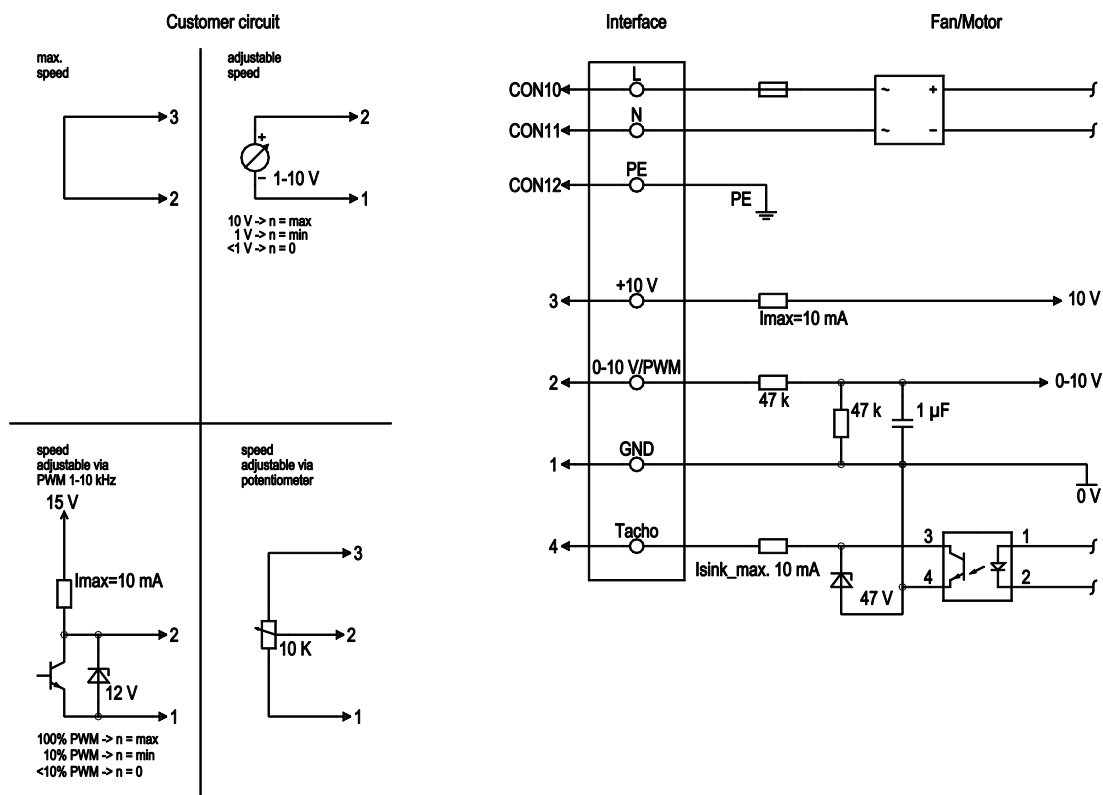


| No. | Conn. | Designation | Colour       | Function / assignment                                                                                                                   |
|-----|-------|-------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------|
|     | CON10 | L           | brown        | Mains connection, power supply, phase, see type plate for voltage range                                                                 |
|     | CON11 | N           | blue         | Mains connection, power supply, neutral conductor, see type plate for voltage range                                                     |
|     | CON12 | PE          | green/yellow | Earth connection                                                                                                                        |
|     | 2     | 0- 10V PWM  | yellow       | 0-10 V/PWM control input, R <sub>i</sub> =100 kΩ, SELV                                                                                  |
|     | 4     | Tach        | white        | Speed monitoring output, open collector, 1 pulse per revolution, I <sub>sink</sub> max = 10 mA, SELV                                    |
|     | 3     | +10 V       | red          | Fixed voltage output 10 VDC ±3 %, I <sub>max</sub> 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometer), SELV |
|     | 1     | GND         | blue         | Signal ground for control interface, SELV                                                                                               |

# EC centrifugal fan

forward curved, single inlet

## Charts: Air flow 50 Hz

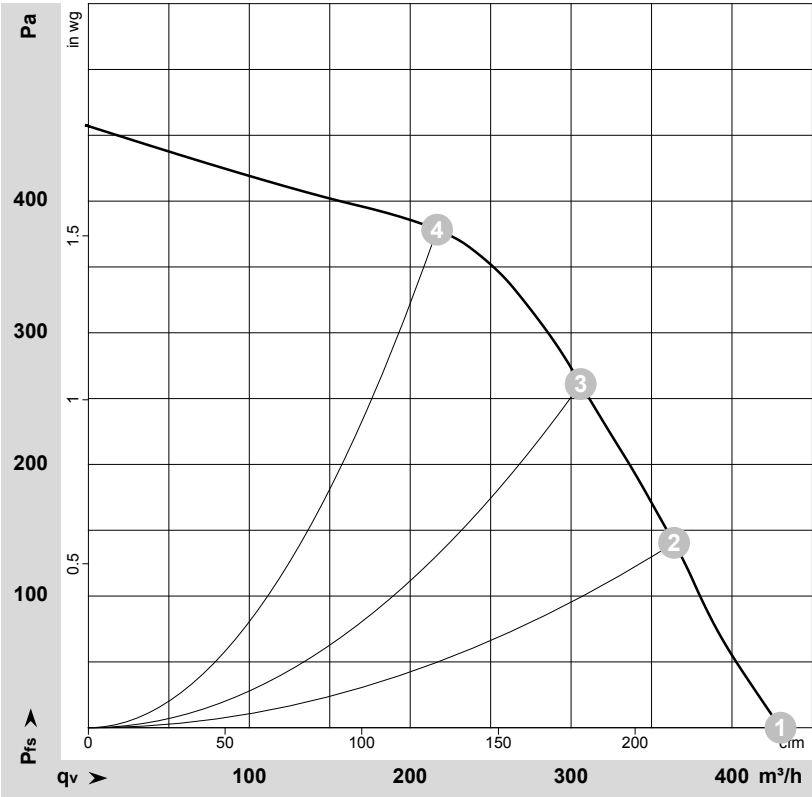

$\rho = 1.191\ kg/m^3 \pm 2\ \%$

Measurement: LU-170411-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>ed</sub> | I    | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|---|-----|----|-------------------|-----------------|------|-------------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W               | A    | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1 | 230 | 50 | 2000              | 100             | 0.77 | 430               | 0               | 255            | 0.00               |
| 2 | 230 | 50 | 2165              | 89              | 0.71 | 365               | 140             | 215            | 0.56               |
| 3 | 230 | 50 | 2305              | 80              | 0.63 | 305               | 260             | 180            | 1.04               |
| 4 | 230 | 50 | 2530              | 64              | 0.50 | 215               | 380             | 130            | 1.53               |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

