

# EC centrifugal fan

forward curved, single inlet

R3G160-AK01-09 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142

## Nominal data

|                          |                       |            |
|--------------------------|-----------------------|------------|
| <b>Type</b>              | <b>R3G160-AK01-09</b> |            |
| <b>Motor</b>             | <b>M3G055-DF</b>      |            |
| Phase                    |                       | 1~         |
| Nominal voltage          | VAC                   | 230        |
| Nominal voltage range    | VAC                   | 200 .. 240 |
| Frequency                | Hz                    | 50/60      |
| Type of data definition  |                       | ml         |
| Speed (rpm)              | min <sup>-1</sup>     | 1625       |
| Power input              | W                     | 85         |
| Current draw             | A                     | 0.7        |
| Min. back pressure       | Pa                    | 0          |
| Min. ambient temperature | °C                    | -25        |
| Max. ambient temperature | °C                    | 60         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations




### Technical features

|  |  |
|--|--|
| Mass   | 1.5 kg   |
| Size   | 160 mm   |
| Surface of rotor   | Thick layer passivated   |
| Material of impeller   | Sheet steel, galvanised  |
| Direction of rotation  | Clockwise, seen on rotor   |
| Type of protection   | IP 54  |
| Insulation class   | "B"  |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C  |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C  |
| Mounting position  | Any  |
| Condensate discharge holes   | None, open rotor   |
| Operation mode   | S1   |
| Motor bearing  | Ball bearing   |
| Technical features   | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Output limit</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage detection</li> </ul> |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA  |
| Motor protection   | Locked-rotor protection  |
| Cable exit   | Variable   |
| Protection class   | I (if protective earth is connected by customer)   |
| Product conforming to standard                                     | EN 60335-1; CE   |

# EC centrifugal fan

forward curved, single inlet

## Product drawing

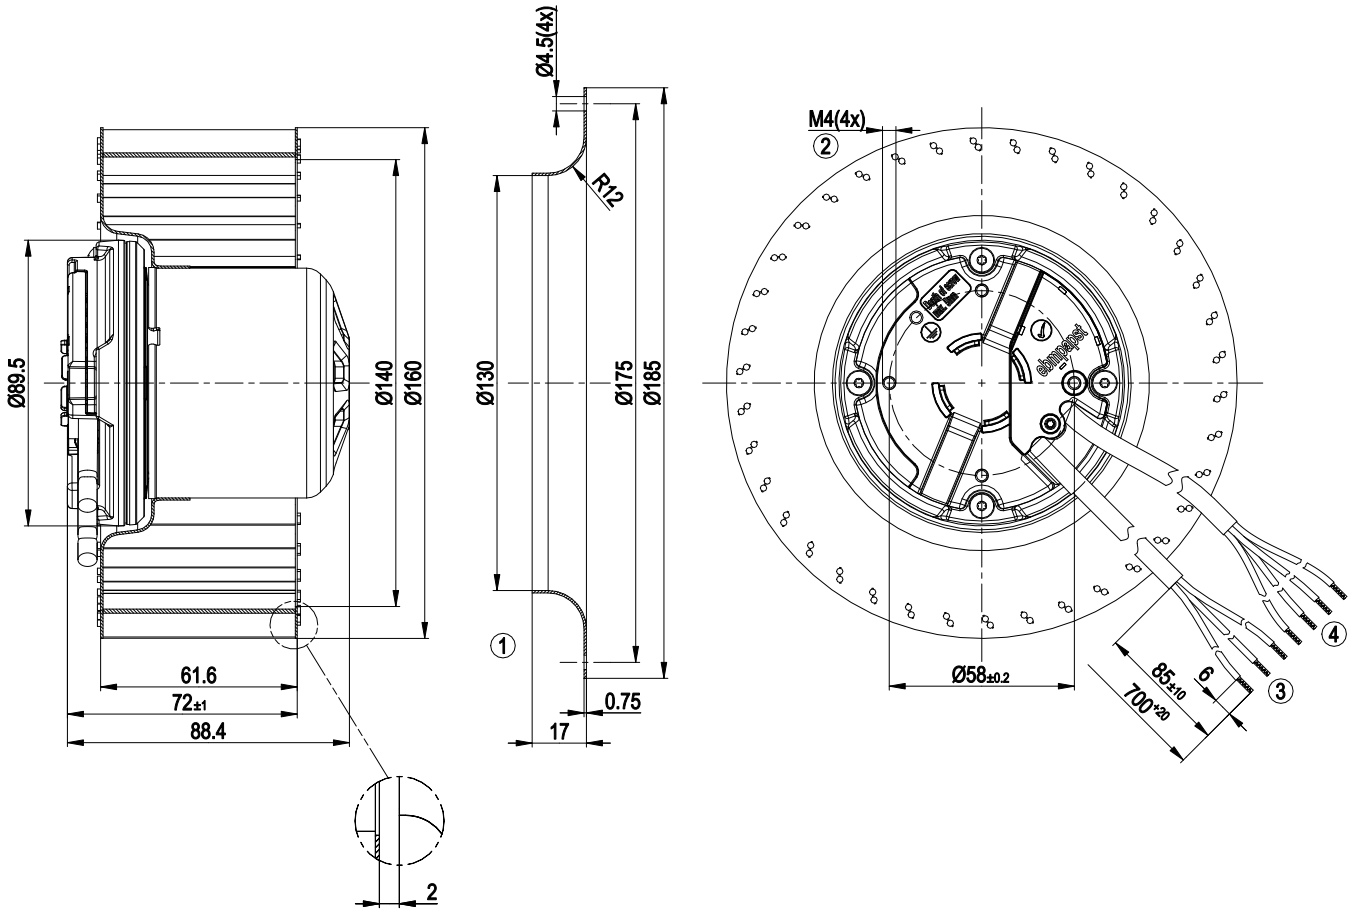


|   |   |
|---|---|
| 1 | Accessory part: Inlet nozzle 09588-2-4013 not included in scope of delivery |
| 2 | Thread reach max. 5 mm  |
| 3 | Connection line PVC 3x AWG20, 3x lead tips crimped                          |
| 4 | Connection line PVC 4x AWG22, 4x lead tips crimped                          |



# EC centrifugal fan

forward curved, single inlet


## Connection screen

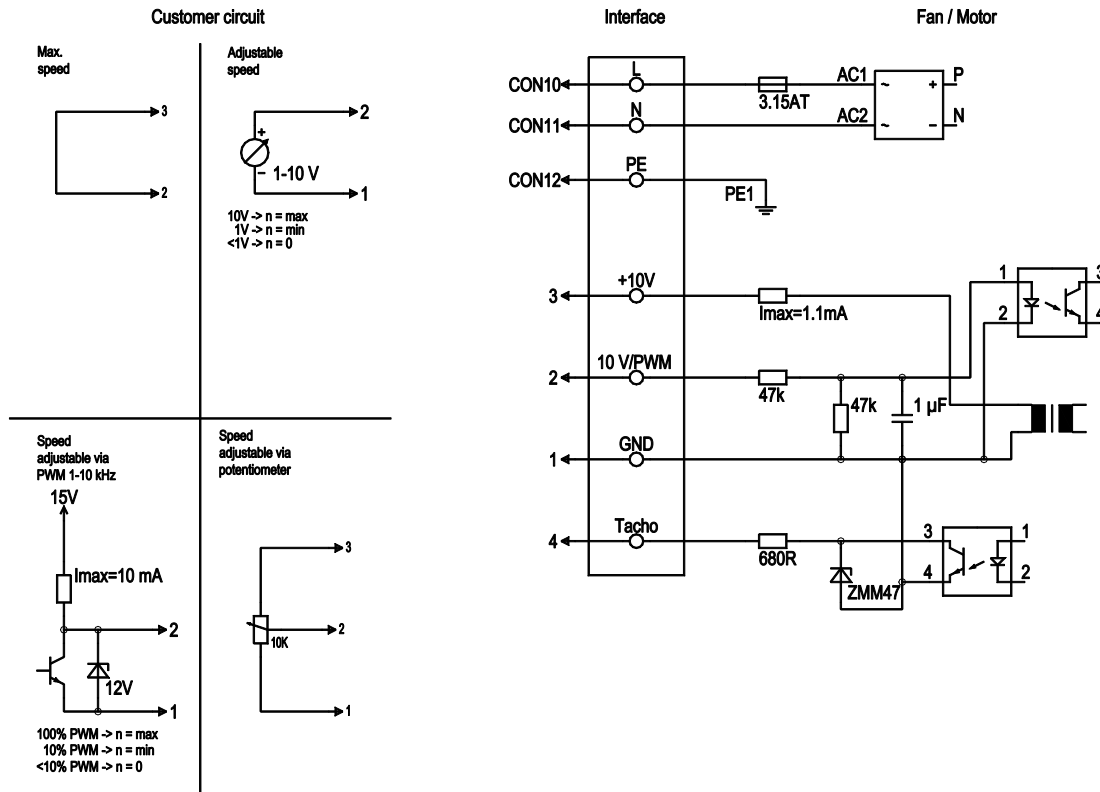

| No. | Conn. | Designation        | Colour       | Function / assignment  |
|-----|-------|--------------------|--------------|--|
|     | CON10 | L                  | black        | Power supply 230 VAC, 50-60 Hz, see type plate for voltage range           |
|     | CON11 | N                  | blue         | Neutral conductor  |
|     | CON12 | PE                 | green/yellow | Protective earth   |
|     | 1     | GND                | blue         | GND connection for control interface                                       |
|     | 2     | 0-10V PWM          | yellow       | Control input 0-10 V or PWM, electrically isolated                         |
|     | 3     | 10 V / max. 1,1 mA | red          | Voltage output 10 VDC 1.1 mA, electrically isolated, short-circuit-proof   |
|     | 4     | Tacho              | white        | Tach output: Open collector, 1 pulse per revolution, electrically isolated |



## Charts: Air flow 50 Hz

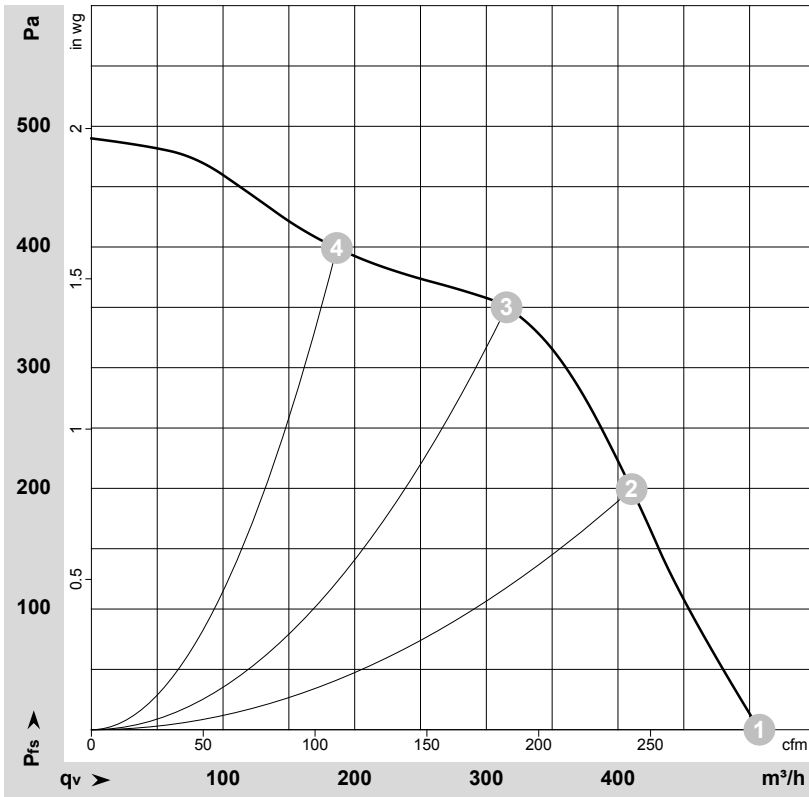

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-142287-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>ed</sub> | I    | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub>    |
|---|-----|----|-------------------|-----------------|------|-------------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W               | A    | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1 | 230 | 50 | 1625              | 85              | 0.70 | 505               | 0               | 300            | 0.00               |
| 2 | 230 | 50 | 1860              | 85              | 0.70 | 410               | 200             | 240            | 0.80               |
| 3 | 230 | 50 | 2170              | 76              | 0.66 | 315               | 350             | 185            | 1.41               |
| 4 | 230 | 50 | 2375              | 57              | 0.52 | 185               | 400             | 110            | 1.61               |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase