

R3G160-RB35-11 ebmpapst Datasheet FansCo

sales@fansco.com

www.fansco.com

Nominal data

Type	R3G160-RB35-11	
Motor	M3G055-BD	
Phase		1~
Nominal voltage	VAC	115
Nominal voltage range	VAC	100 .. 130
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	3900
Power consumption	W	65
Current draw	A	1.0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description

Weight	0.9 kg
Size	160 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PP plastic
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 1.1 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

Product drawing

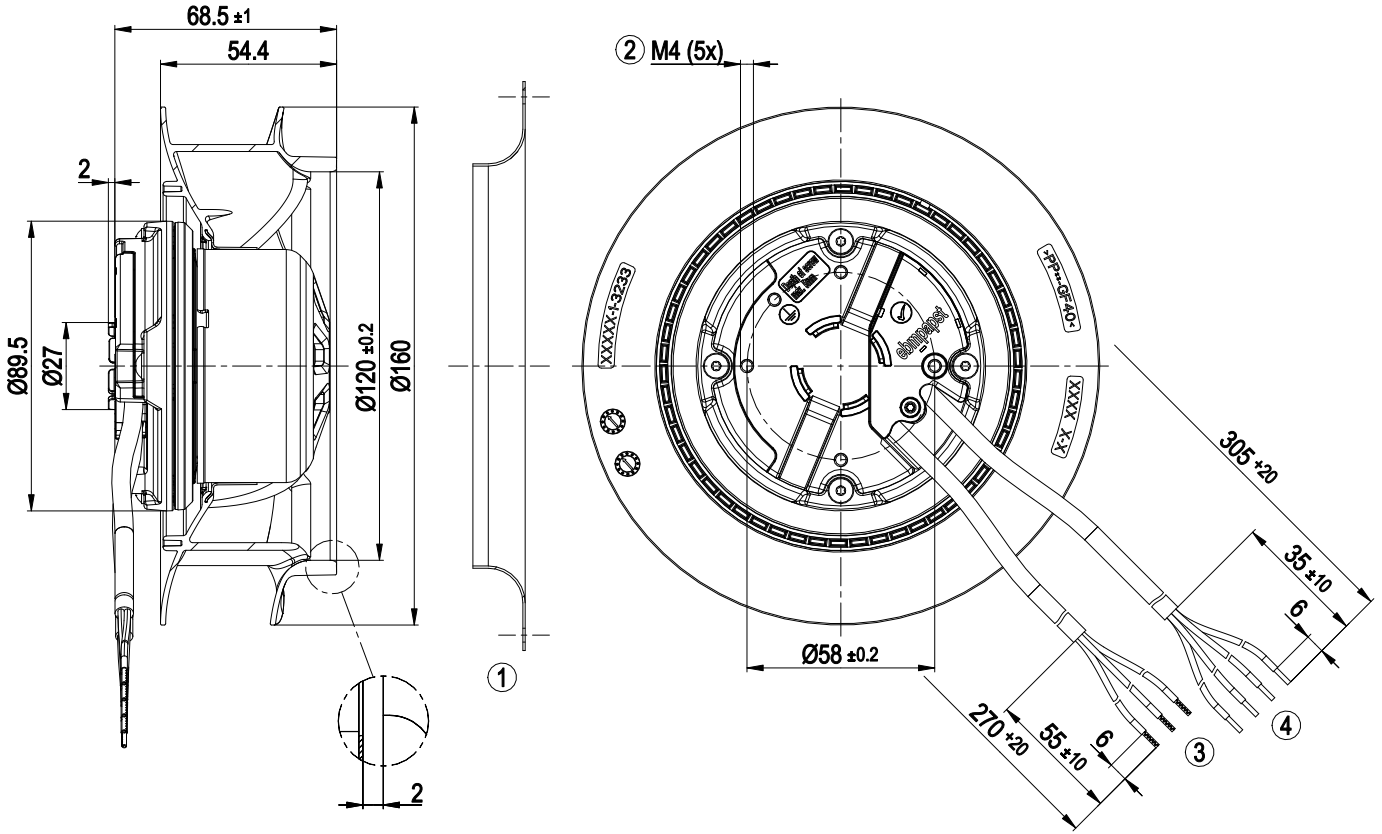


1	Accessory part: inlet ring 09588-2-4013 not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Cable PVC AWG20 3x splice
4	Cable PVC AWG22 4x splice



EC centrifugal fan

forward-curved, single-intake


Accessory part

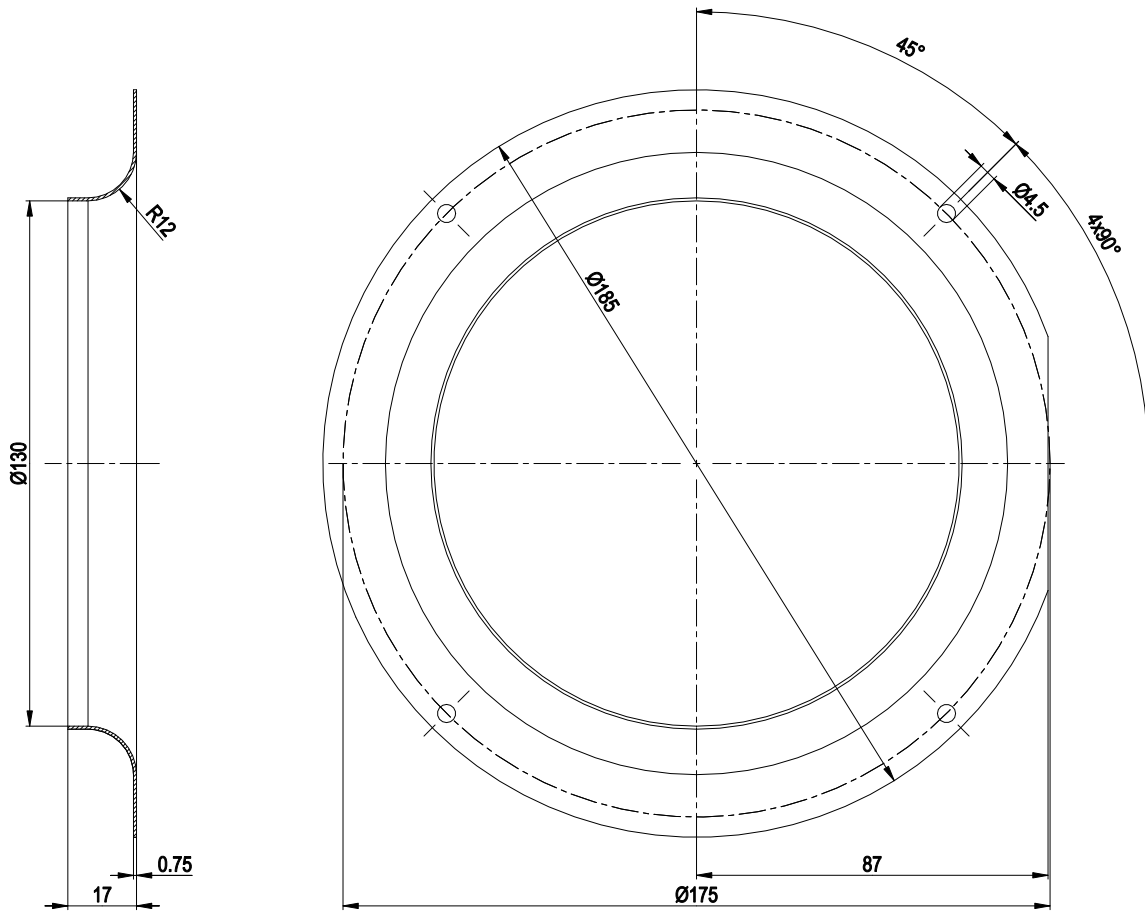

Inlet ring 09588-2-4013




Connection diagram

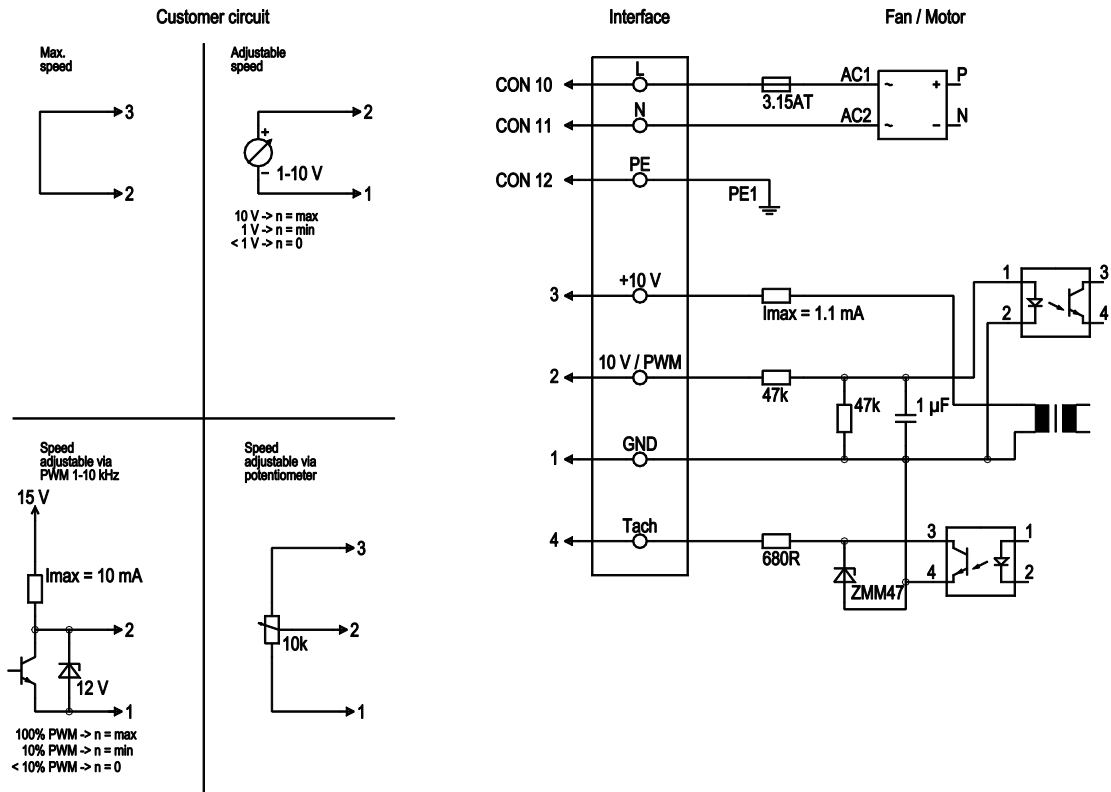

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply 115 VAC, 50-60 Hz, see nameplate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	3	10V/ max 1.1mA	red	Voltage output 10 V / 1.1 mA, electrically isolated, not short-circuit-proof.
	2	0- 10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	1	GND	blue	GND connection for control interface
	4	Tacho	white	Tach output: open collector, 1 pulse per revolution, electrically isolated

Curves: Air performance 50 Hz

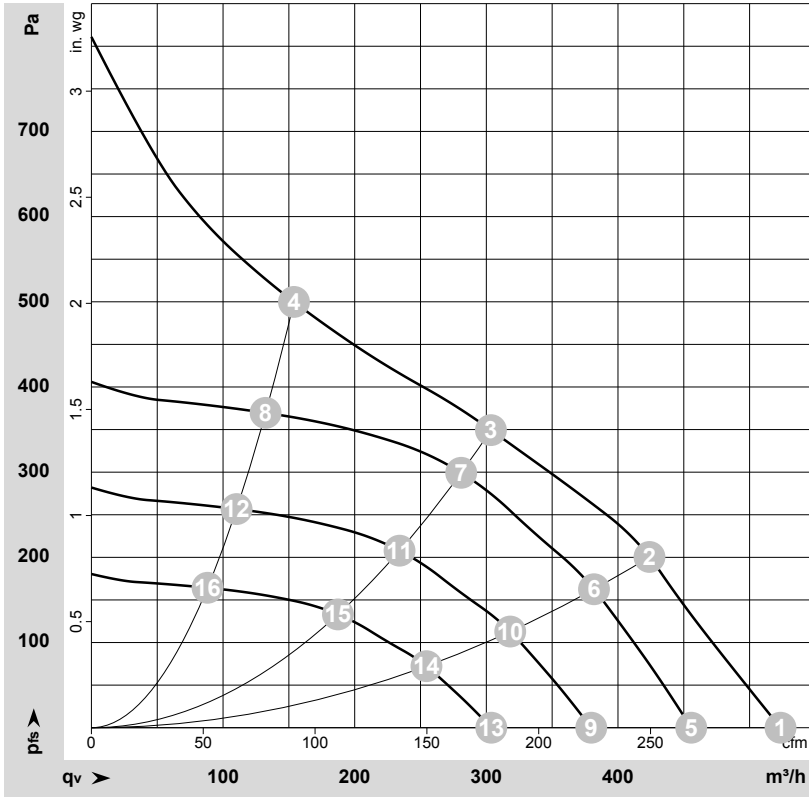

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-205549-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	1~	115	50	4135	65	1.00	525	0	310	0.00
2	1~	115	50	4000	65	1.00	425	200	250	0.80
3	1~	115	50	3900	65	1.00	305	350	180	1.41
4	1~	115	50	4185	65	1.00	155	500	90	2.01
5	1~	115	50	3600	43	0.66	455	0	270	0.00
6	1~	115	50	3600	48	0.74	380	163	225	0.65
7	1~	115	50	3600	52	0.80	280	299	165	1.20
8	1~	115	50	3600	41	0.64	130	370	80	1.49
9	1~	115	50	3000	25	0.38	380	0	225	0.00
10	1~	115	50	3000	28	0.43	320	113	185	0.45
11	1~	115	50	3000	30	0.46	235	208	140	0.84
12	1~	115	50	3000	24	0.37	110	257	65	1.03
13	1~	115	50	2400	13	0.20	305	0	180	0.00
14	1~	115	50	2400	14	0.22	255	73	150	0.29
15	1~	115	50	2400	15	0.24	185	133	110	0.53
16	1~	115	50	2400	12	0.19	90	164	50	0.66

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_s = Pressure increase

