

R3G190-RC05-29 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
 County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
 County court Stuttgart · HRB 590142

Nominal data

Type	R3G190-RC05-29	
Motor	M3G055-BI	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Type of data definition		ml
Speed (rpm)	min ⁻¹	3255
Power input	W	84
Current draw	A	0.75
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60


ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
 Subject to alterations



Technical features


Mass	1.1 kg
Size	190 mm
Surface of rotor	Thick layer passivated
Material of electronics housing	Die-cast aluminium
Material of impeller	PA plastic
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Tach output - Output limit - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Over-temperature protected electronics / motor - Line undervoltage detection
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Locked-rotor protection
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE

Product drawing

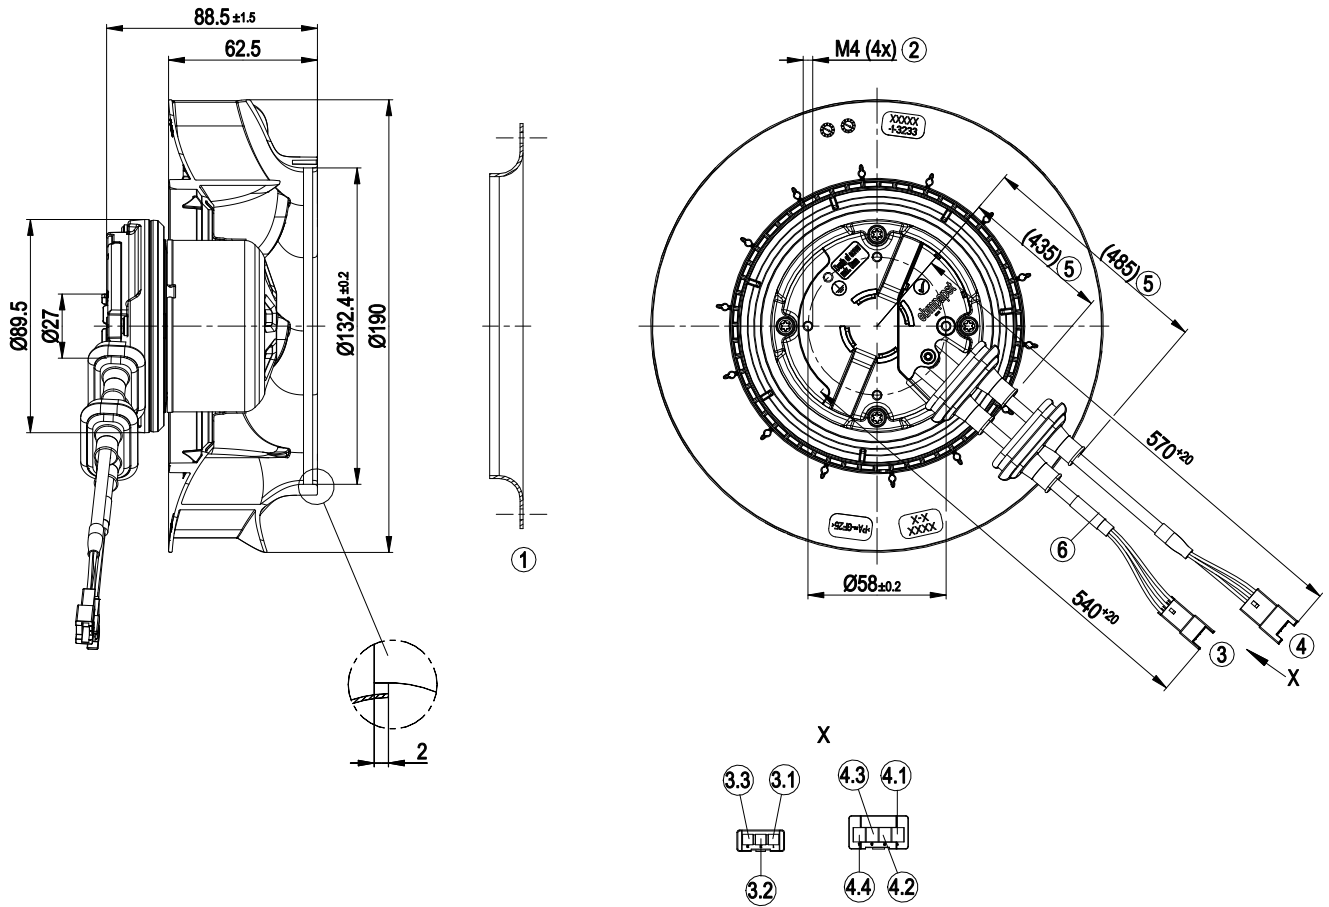


1	Accessory part: Inlet nozzle 09576-2-4013 not included in scope of delivery
2	Thread reach max. 5 mm
3	Connection line PVC AWG20, connector housing 3-pole JST XARR-03VF, 3x plug pin JST SXAM-01T-P0.6
3.1	L (black)
3.2	N (blue)
3.3	PE (green/yellow)
4	Connection line PVC AWG22, connector housing 4-pole JST XARR-04VF, 3x plug pin JST SXAM-01T-P0.6
4.1	0-10 V PWM (yellow)
4.2	GND (blue)
4.3	Tach (white)
4.4	not used
5	The exact position of the grommet cannot be confirmed
6	Heat shrink tube, yellow

Accessory part

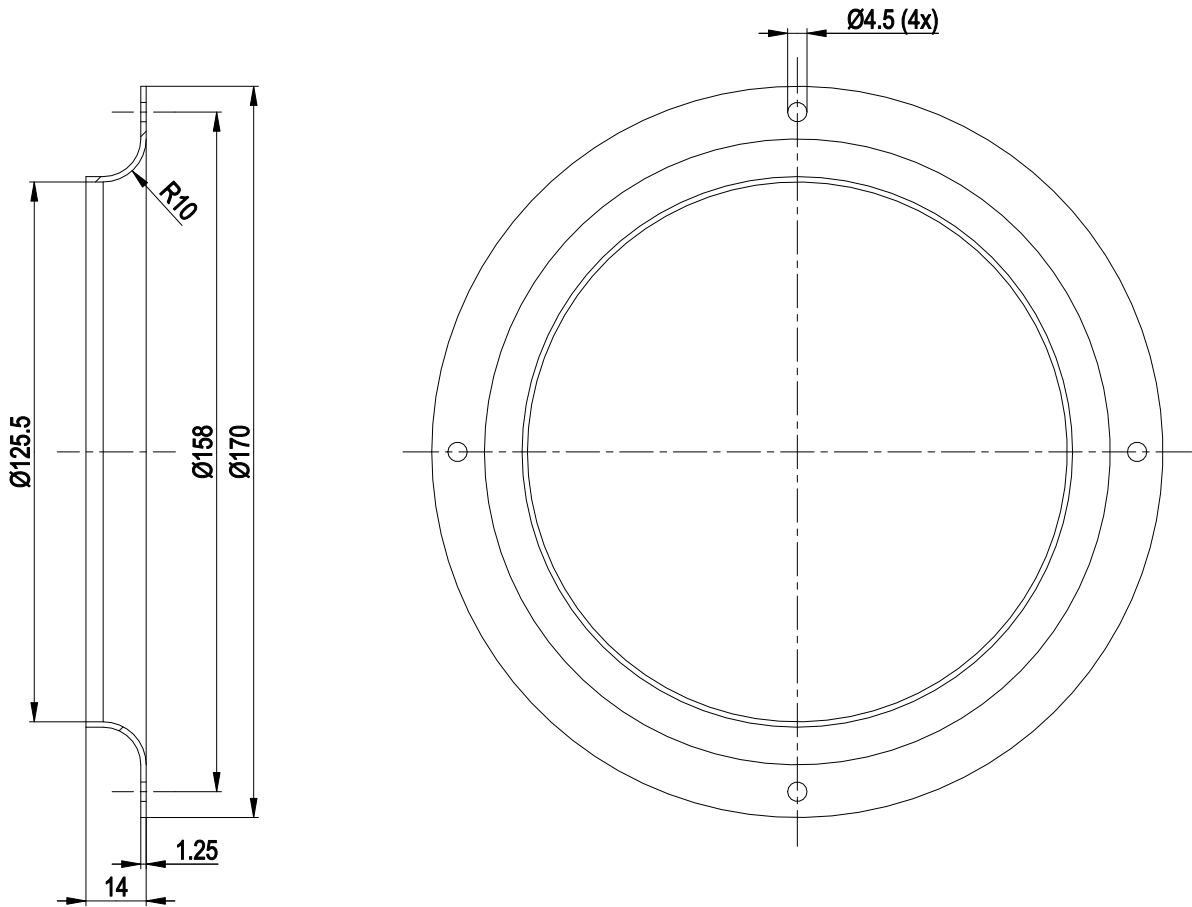


1 Accessory part: Inlet nozzle 09576-2-4013 not included in scope of delivery

Connection screen

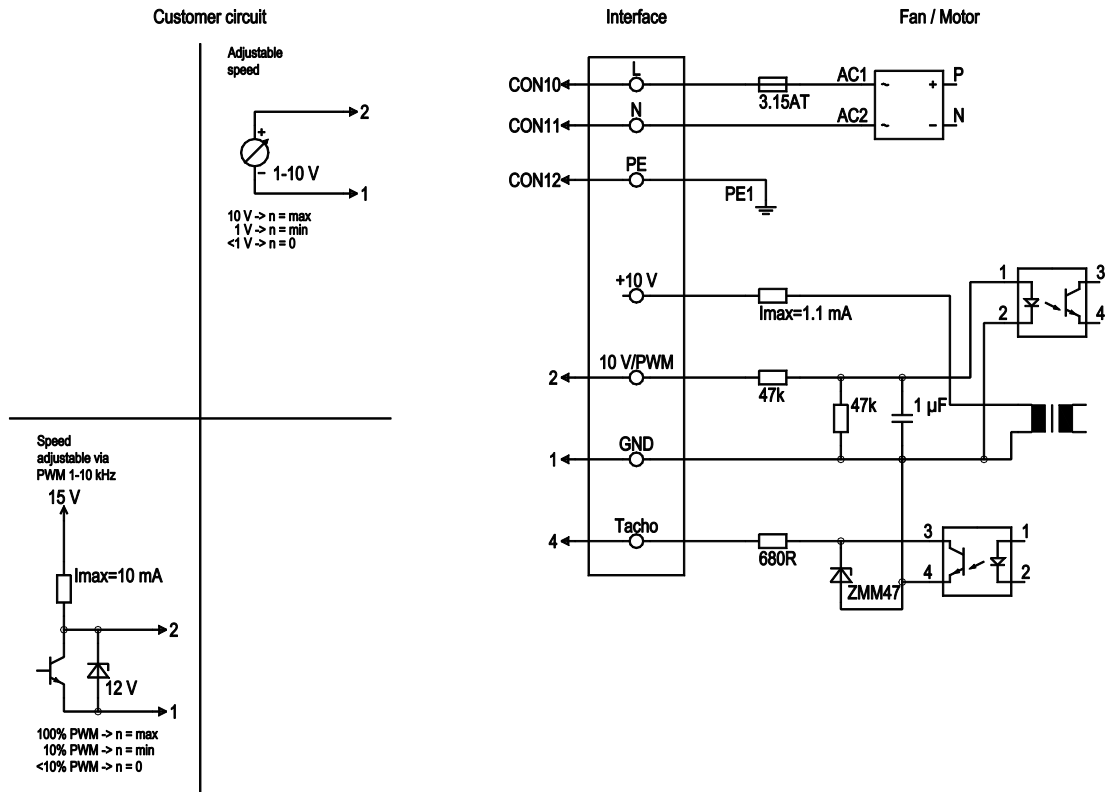

No.	Conn.	Designation	Colour	Function / assignment
	CON10	L	black	Power supply 230 VAC, 50-60 Hz, see type plate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND connection for control interface
	2	0-10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	4	Tacho	white	Tach output: open collector, 1 pulse per revolution, electrically isolated, $I_{sink_max}=10\text{ mA}$

Charts: Air flow 50 Hz

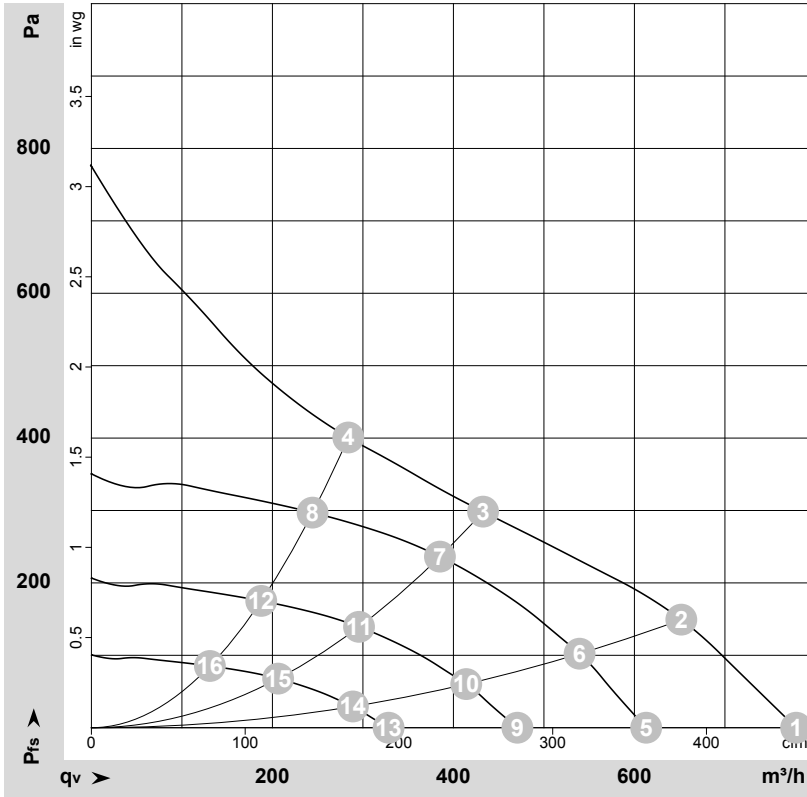

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-167087-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	inH ₂ O
1	230	50	3555	84	0.75	780	0	460	0.00
2	230	50	3385	84	0.75	650	150	385	0.60
3	230	50	3255	84	0.75	435	300	255	1.20
4	230	50	3250	84	0.75	285	400	165	1.61
5	230	50	2800	40	0.36	615	0	360	0.00
6	230	50	2800	47	0.41	540	103	315	0.41
7	230	50	2800	58	0.51	385	237	225	0.95
8	230	50	2800	54	0.47	245	297	145	1.19
9	230	50	2150	18	0.16	470	0	275	0.00
10	230	50	2150	21	0.19	415	61	245	0.24
11	230	50	2150	26	0.23	295	140	175	0.56
12	230	50	2150	24	0.21	190	175	110	0.70
13	230	50	1500	6.0	0.05	330	0	195	0.00
14	230	50	1500	7.0	0.06	290	29	170	0.12
15	230	50	1500	9.0	0.08	205	68	120	0.27
16	230	50	1500	8.0	0.07	130	85	75	0.34

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase

