

R3G190-RD17-24 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R3G190-RD17-24	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	3090
Power consumption	W	73
Current draw	A	0.65
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description

Weight	1.3 kg
Size	190 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 1.1 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE


Product drawing

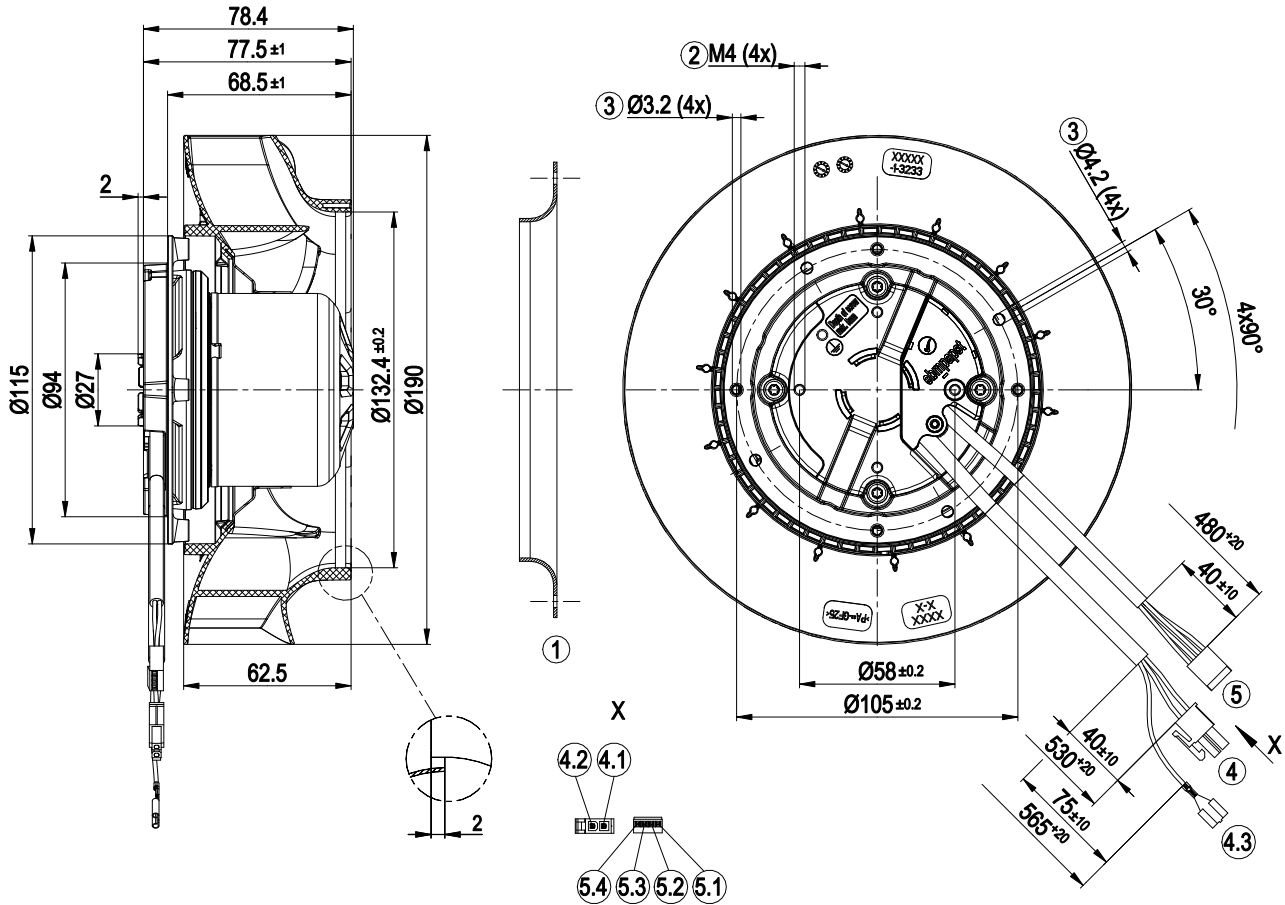

1	Accessory part: inlet ring 09576-2-4013 not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Tapping hole prepared for Ø 4 mm self-tapping screw for fastening plastics, max. clearance for screw 10 mm
4	Cable PVC AWG20 2-pole connector housing Molex 46992-0210, 2x socket Molex 39-00-0059
4.1	L (black)
4.2	N (blue)
4.3	PE (green/yellow), flat push-on receptacle 6.3x0.8
5	Cable PVC AWG22 4-pole connector housing Molex 22-01-3047, 4x plug pin Molex 08-50-0031
5.1	GND (blue)
5.2	+10 V (red)
5.3	0-10 V PWM (yellow)
5.4	Tach (white)




Accessory part

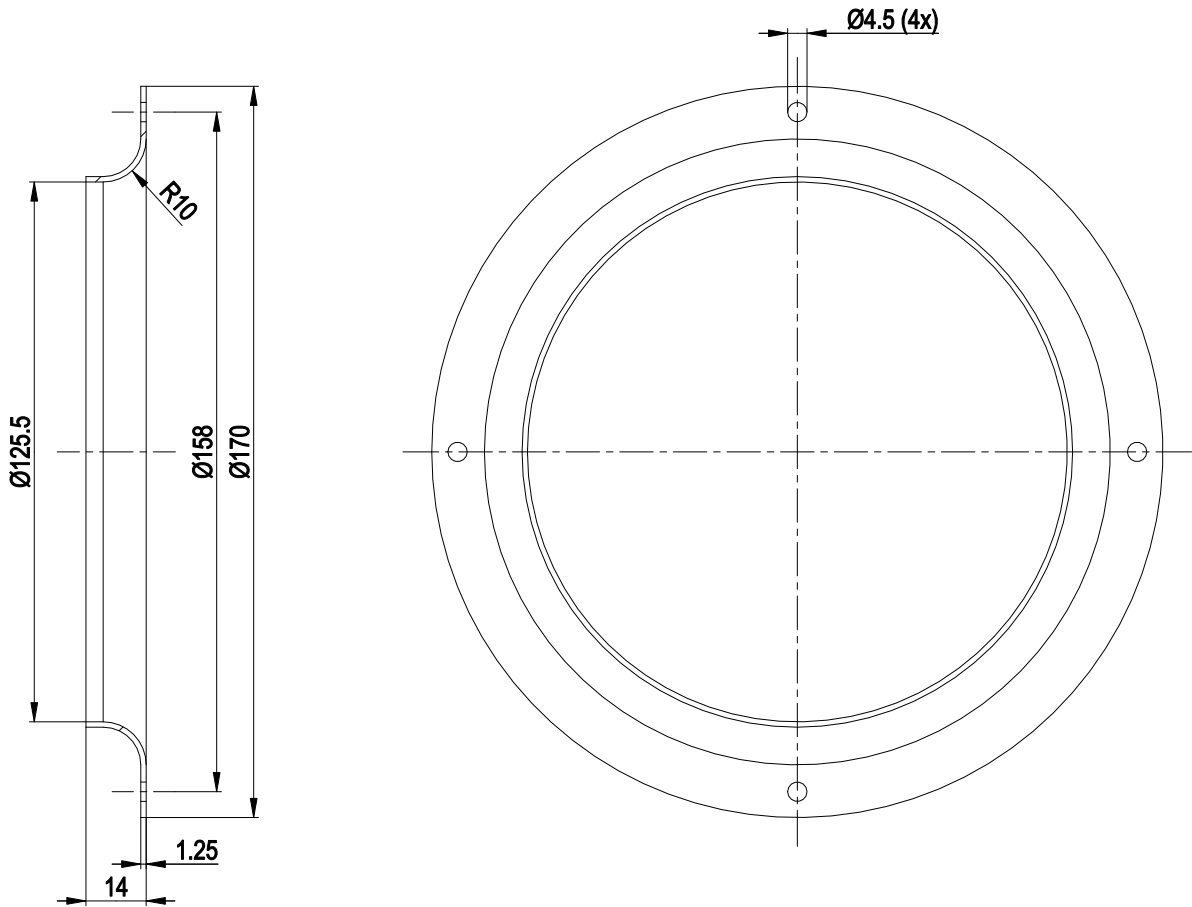

1 Accessory part: inlet ring 09576-2-4013 not included in scope of delivery




Connection diagram

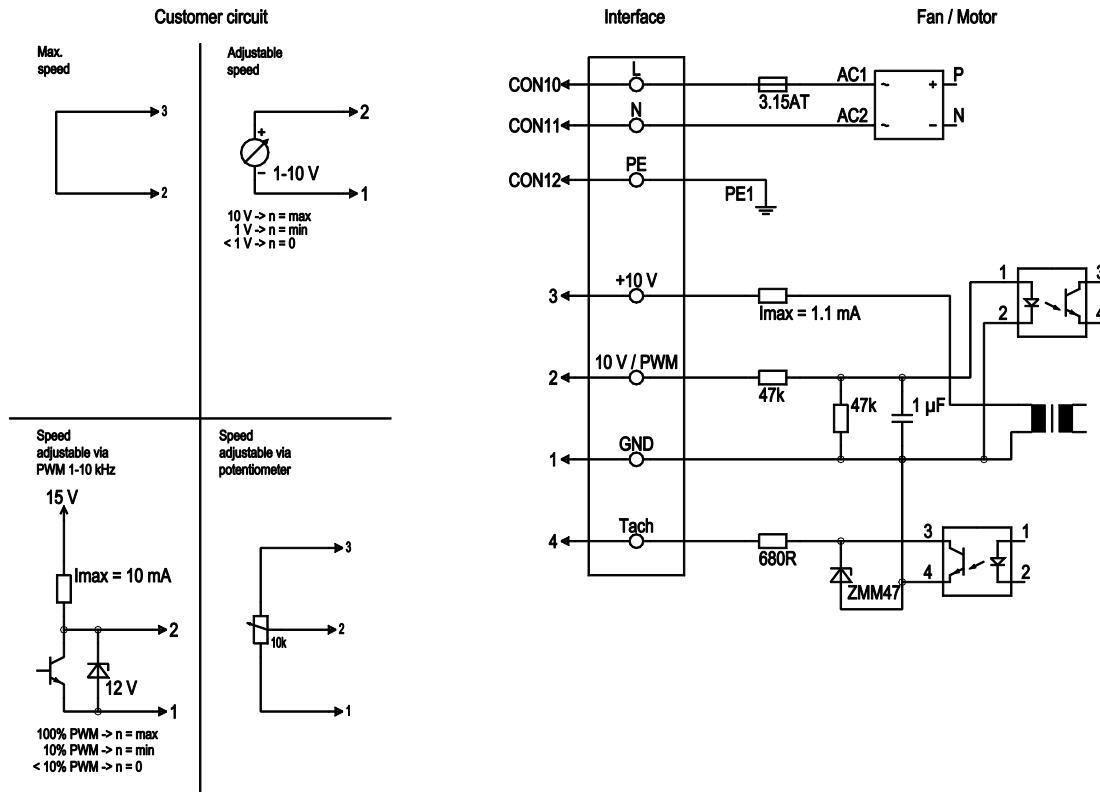

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND connection for control interface
	2	0-10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	3	10 V / max. 1,1 mA	red	Voltage output 10 VDC 1.1 mA, electrically isolated, short-circuit-proof
	4	Tacho	white	Tach output: open collector, 1 pulse per revolution, electrically isolated



Curves: Air performance 50 Hz

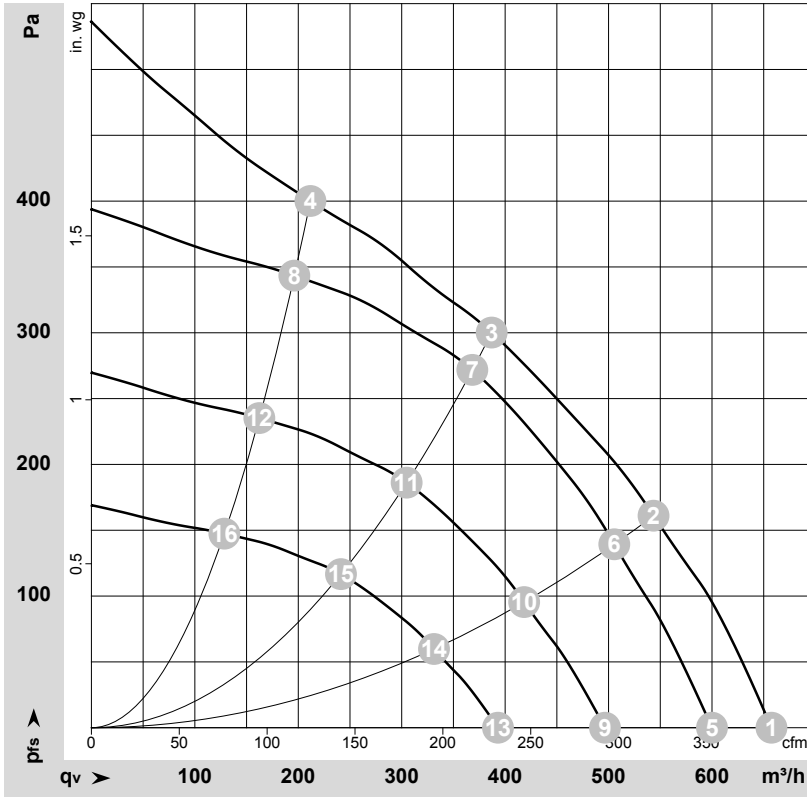

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-160414-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	3180	59	0.54	65	72	655	0	385	0.00
2	1~	230	50	3120	64	0.58	60	67	545	160	320	0.64
3	1~	230	50	3090	73	0.65	58	66	385	300	230	1.20
4	1~	230	50	3130	63	0.57	61	70	210	400	125	1.61
5	1~	230	50	2900	45	0.41	62	70	600	0	355	0.00
6	1~	230	50	2900	51	0.47	58	66	505	139	300	0.56
7	1~	230	50	2900	59	0.53	57	65	370	272	215	1.09
8	1~	230	50	2900	50	0.46	59	68	195	343	115	1.38
9	1~	230	50	2400	25	0.23	58	65	495	0	295	0.00
10	1~	230	50	2400	29	0.27	53	61	420	95	245	0.38
11	1~	230	50	2400	34	0.30	52	60	305	187	180	0.75
12	1~	230	50	2400	28	0.26	55	63	160	235	95	0.94
13	1~	230	50	1900	13	0.12	52	59	395	0	230	0.00
14	1~	230	50	1900	14	0.13	47	55	330	60	195	0.24
15	1~	230	50	1900	17	0.15	46	54	240	117	140	0.47
16	1~	230	50	1900	14	0.13	49	58	130	147	75	0.59

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · P_{fs} = Pressure increase

