

R3G220-RD19-06 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	R3G220-RD19-06	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	3085
Power consumption	W	145
Current draw	A	1.2
Min. ambient temperature	°C	-25

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	58.1	42.6	09 Power consumption $P_{ed}$	kW	0.14
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	805
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	328
04 Efficiency grade N		77.5	62	10 Speed (rpm) n	min <sup>-1</sup>	3095
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_g / 100\,000\text{ Pa}$ 

LU-135496




## Technical description

Weight	1.5 kg
Size	220 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Tach output</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Plug
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1

# EC centrifugal fan

backward-curved, single-intake

## Product drawing

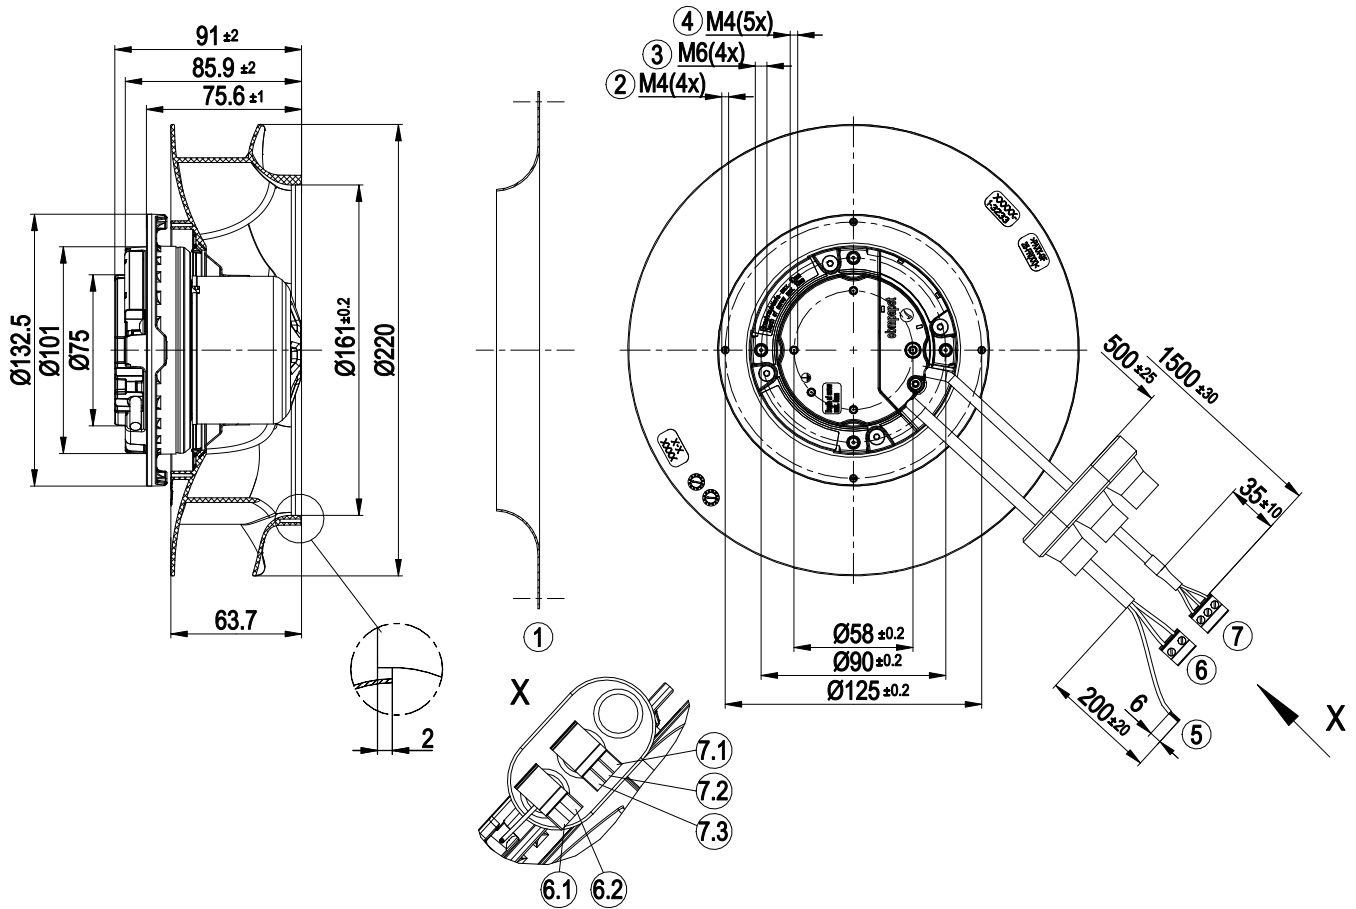


1	Accessory part: inlet ring 09609-2-4013 not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Max. clearance for screw 10 mm
4	Max. screw-in depth 5 mm
5	green/yellow, wire-end splice
6	Cable PVC AWG20, 2-pole connector housing Phoenix GMVSTBR 2.5/2-ST (green)
7	Cable PVC 3x 0.25 mm <sup>2</sup> , 3-pole connector housing Phoenix MVSTBR 2.5/3-ST



# EC centrifugal fan

backward-curved, single-intake


## Accessory part

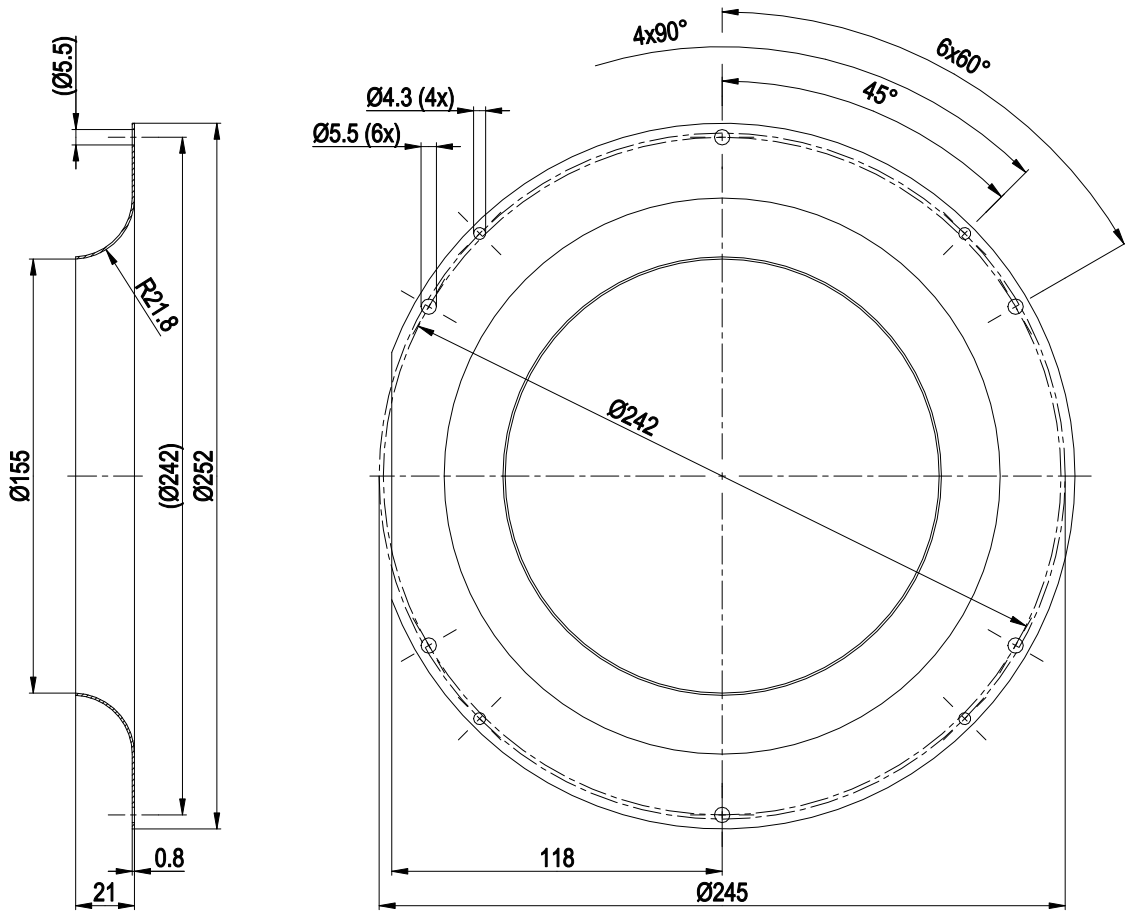

Inlet ring 09609-2-4013 not included in scope of delivery




## Connection diagram

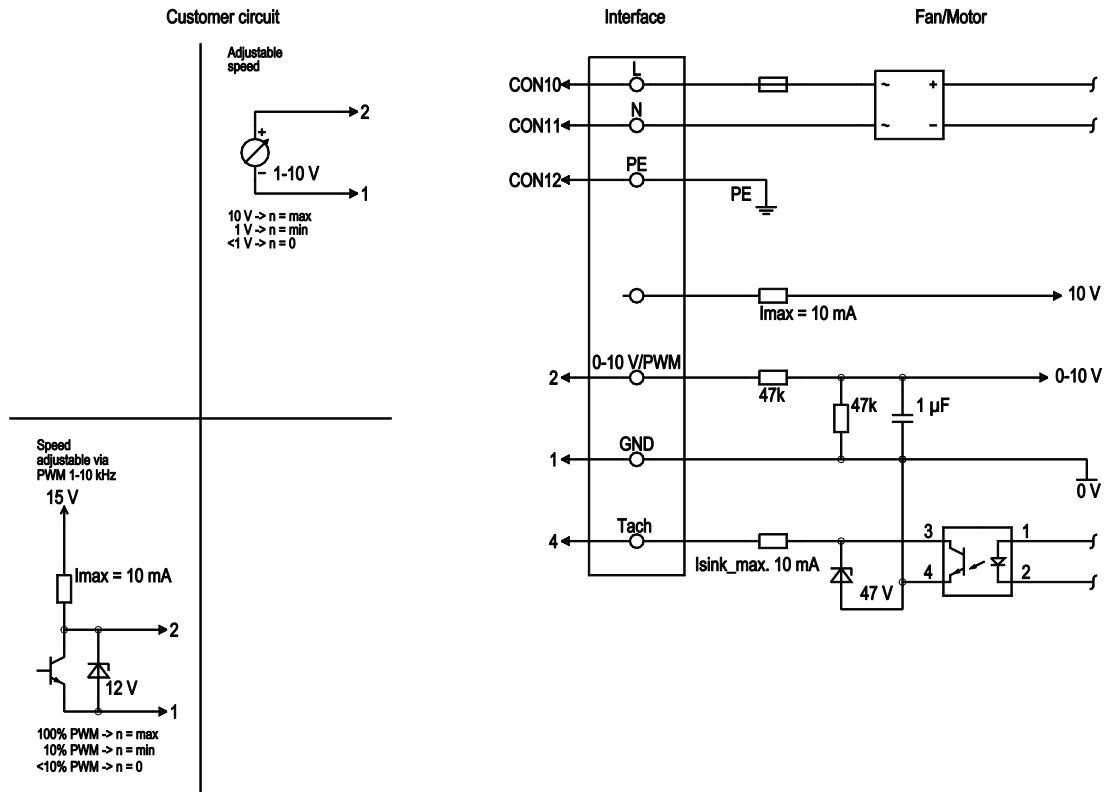

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
	2	0- 10V PWM	yellow	0-10 V / PWM control input, $R_i=100 \text{ k}\Omega$ , SELV
	4	Tach	white	Tach output, open collector, 1 pulse per revolution, $I_{sink \text{ max}} = 10 \text{ mA}$ , SELV
	1	GND	blue	Reference ground for control interface, SELV

## Curves: Air performance 50 Hz

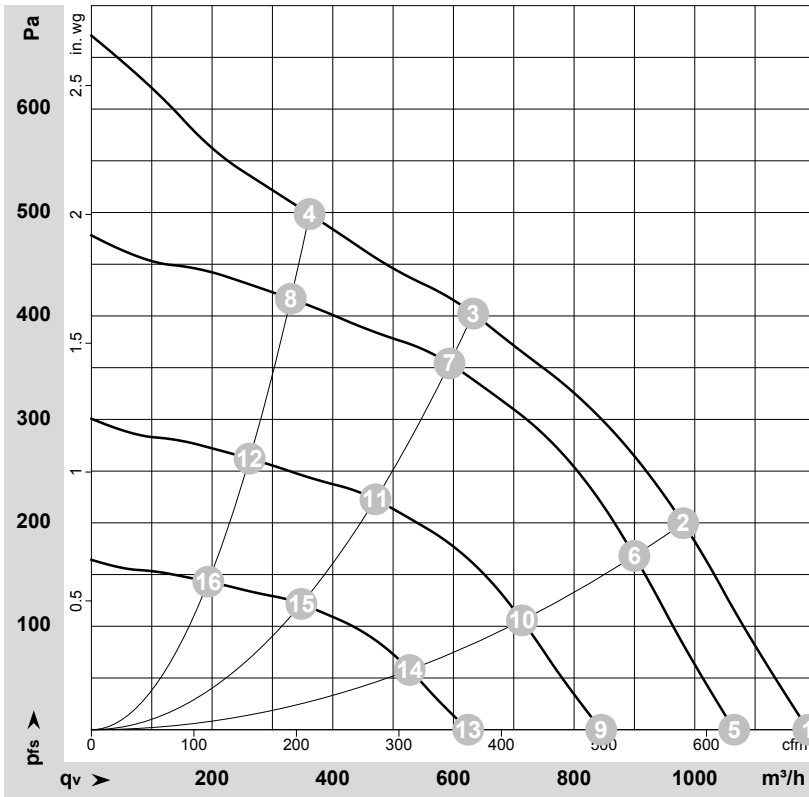

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-135496-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>ed</sub>	I	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	in. wg
1	1~	230	50	3235	120	0.98	1190	0	700	0.00
2	1~	230	50	3160	134	1.10	980	200	575	0.80
3	1~	230	50	3085	145	1.20	635	400	375	1.61
4	1~	230	50	3170	132	1.06	360	500	215	2.01
5	1~	230	50	2900	86	0.71	1065	0	625	0.00
6	1~	230	50	2900	103	0.84	900	169	530	0.68
7	1~	230	50	2900	118	0.95	595	354	350	1.42
8	1~	230	50	2900	101	0.81	330	417	195	1.67
9	1~	230	50	2300	43	0.35	845	0	495	0.00
10	1~	230	50	2300	52	0.42	715	106	420	0.43
11	1~	230	50	2300	59	0.48	470	223	275	0.90
12	1~	230	50	2300	50	0.40	260	262	155	1.05
13	1~	230	50	1700	17	0.14	625	0	370	0.00
14	1~	230	50	1700	21	0.17	530	58	310	0.23
15	1~	230	50	1700	24	0.19	350	122	205	0.49
16	1~	230	50	1700	20	0.16	195	143	115	0.57

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

