

R3G225-AE19-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|-------|
| Type | R3G225-AE19-15 | |
| Motor | M3G055-CF | |
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Frequency | Hz | 50/60 |
| Method of obtaining data | | fa |
| Speed (rpm) | min ⁻¹ | 2850 |
| Power consumption | W | 117 |
| Current draw | A | 0.9 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 40 |


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description


| | |
|--|--|
| Weight | 1.5 kg |
| Fan size | 225 mm |
| Rotor surface | Painted black |
| Impeller material | PA plastic |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP44 |
| Insulation class | "B" |
| Moisture (F) / Environmental (H) protection class | F3-1 |
| Max. permitted ambient temp. for motor (transport/storage) | + 80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | - 40 °C |
| Installation position | Any |
| Condensation drainage holes | On rotor side |
| Cooling hole/opening | On rotor side |
| Mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Control input 0.5-9.5 VDC / PWM - Output 10 VDC, max. 1.1 mA - Tach output - Motor current limitation - Soft start |
| EMC immunity to interference | According to EN 61000-6-2 |
| EMC circuit feedback | According to EN 61000-3-2/3 |
| EMC interference emission | According to EN 61000-6-3 (household environment) |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA |
| Motor protection | Thermal overload protector (TOP) internally connected |
| With cable | Variable |
| Protection class | I (with customer connection of protective earth) |
| Conformity with standards | EN 60335-1 |

Product drawing

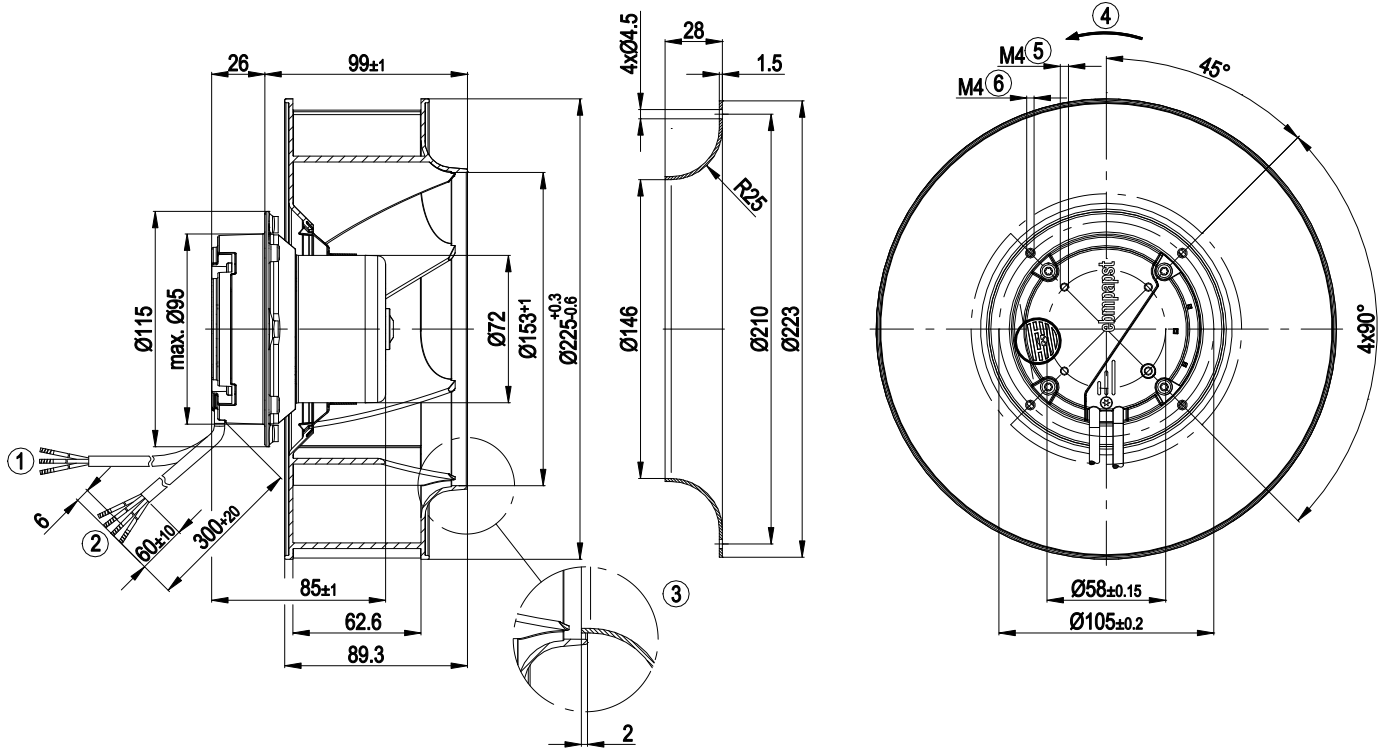

| | |
|---|---|
| 1 | Cable PVC 3G 0.5 mm ² , 3x crimped splices |
| 2 | Cable PVC 4x 0.25 mm ² , 4x crimped splices |
| 3 | Accessory part: inlet ring 96358-2-4013 not included in scope of delivery |
| 4 | Max. clearance for screw 6 mm |
| 5 | Max. clearance for screw 6 mm |


Connection diagram

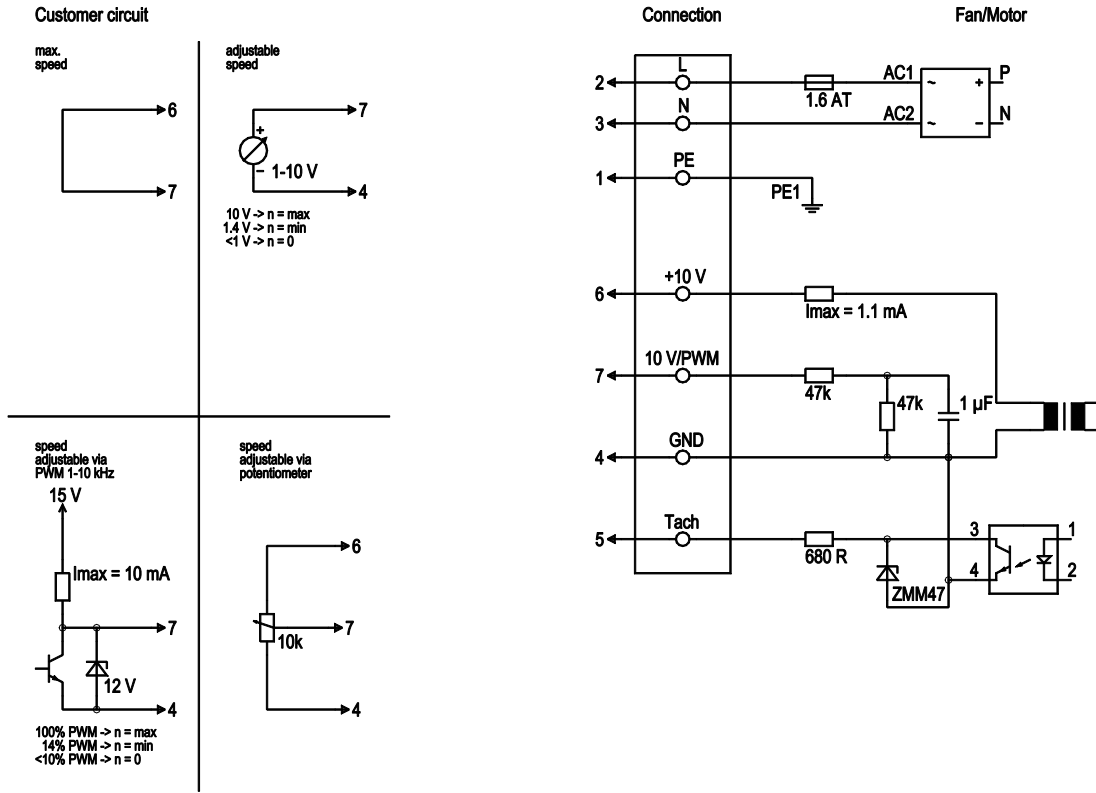

| No. | Conn. | Designation | Color | Function/assignment |
|-----|-------|-------------|--------------|--|
| 1 | 1 | PE | green/yellow | Protective earth |
| 1 | 2 | L | black | Power supply 230 VAC, 50/60 Hz |
| 1 | 3 | N | blue | Neutral conductor |
| 2 | 4 | GND | blue | GND connection for control interface |
| 2 | 5 | Tach | white | Tach output: Open collector, 1 pulse per revolution, electrically isolated |
| 2 | 6 | 10 V | red | Voltage output 10 V / 1 mA, electrically isolated |
| 2 | 7 | 0-10 V PWM | yellow | Control input 0-10 V or PWM, electrically isolated |



Curves: Air performance 50 Hz

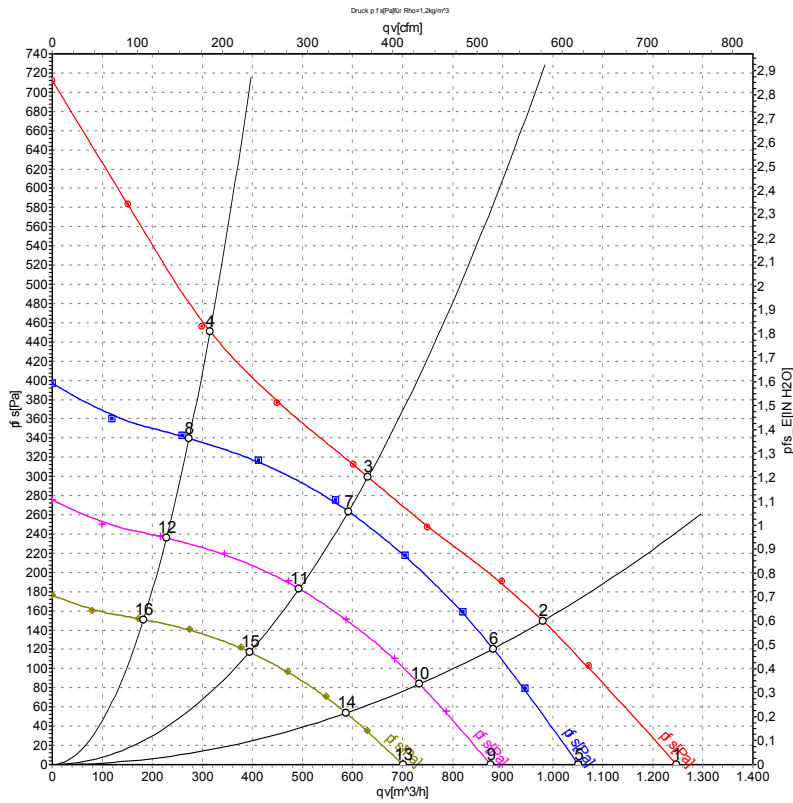

Measurement: LU-67965-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | U | f | n | P _{ed} | I | qv | p _{fs} | qv | p _{fs} |
|----|-----|----|-------------------|-----------------|------|-------------------|-----------------|-----|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa | CFM | inH2O |
| 1 | 230 | 50 | 2850 | 117 | 0.90 | 1250 | 0 | 735 | 0.00 |
| 2 | 230 | 50 | 2675 | 117 | 0.90 | 980 | 150 | 575 | 0.60 |
| 3 | 230 | 50 | 2560 | 120 | 0.90 | 630 | 300 | 370 | 1.20 |
| 4 | 230 | 50 | 2750 | 117 | 0.90 | 315 | 450 | 185 | 1.81 |
| 5 | 230 | 50 | 2400 | 70 | 0.53 | 1050 | 0 | 620 | 0.00 |
| 6 | 230 | 50 | 2400 | 85 | 0.64 | 880 | 121 | 520 | 0.49 |
| 7 | 230 | 50 | 2400 | 96 | 0.74 | 590 | 264 | 350 | 1.06 |
| 8 | 230 | 50 | 2400 | 77 | 0.60 | 275 | 340 | 160 | 1.36 |
| 9 | 230 | 50 | 2000 | 40 | 0.31 | 875 | 0 | 515 | 0.00 |
| 10 | 230 | 50 | 2000 | 49 | 0.37 | 735 | 84 | 430 | 0.34 |
| 11 | 230 | 50 | 2000 | 56 | 0.43 | 495 | 184 | 290 | 0.74 |
| 12 | 230 | 50 | 2000 | 45 | 0.35 | 230 | 236 | 135 | 0.95 |
| 13 | 230 | 50 | 1600 | 21 | 0.16 | 700 | 0 | 415 | 0.00 |
| 14 | 230 | 50 | 1600 | 25 | 0.19 | 585 | 54 | 345 | 0.22 |
| 15 | 230 | 50 | 1600 | 29 | 0.22 | 395 | 118 | 230 | 0.47 |
| 16 | 230 | 50 | 1600 | 23 | 0.18 | 180 | 151 | 105 | 0.61 |

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

