

R3G225-RE07-19 ebmpapst Datasheet  
 sales@fansco.com  
 www.fansco.com

Limited partnership · Headquarters Muldingen  
 Amtsgericht (court of registration) Stuttgart · HRA 590344  
 General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
 Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G225-RE07-19    |            |
| Motor                    | M3G055-DF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 2860       |
| Power consumption        | W                 | 170        |
| Current draw             | A                 | 1.4        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
 Subject to change

## Data according to Commission Regulation (EU) 327/2011

|                                   |   | Actual | Req. 2015 |                                |                   |      |
|-----------------------------------|---|--------|-----------|--------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 61.7   | 43.1      | 09 Power consumption $P_{ed}$  | kW                | 0.16 |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$              | m <sup>3</sup> /h | 705  |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$  | Pa                | 458  |
| 04 Efficiency grade N             |   | 80.6   | 62        | 10 Speed (rpm) n               | min <sup>-1</sup> | 2865 |
| 05 Variable speed drive           |   | Yes    |           | 11 Specific ratio <sup>*</sup> |                   | 1.00 |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

<sup>\*</sup> Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-127001




### Technical description

|   |  |
|---|--|
| <b>Weight</b>   | 1.7 kg   |
| <b>Fan size</b>   | 225 mm   |
| <b>Rotor surface</b>  | Thick-film passivated  |
| <b>Impeller material</b>  | PA plastic   |
| <b>Number of blades</b>   | 7  |
| <b>Direction of rotation</b>  | Clockwise, viewed toward rotor   |
| <b>Degree of protection</b>   | IP54   |
| <b>Insulation class</b>   | "B"  |
| <b>Max. permitted ambient temp. for motor (transport/storage)</b>                 | + 80 °C  |
| <b>Min. permitted ambient temp. for motor (transport/storage)</b>                 | - 40 °C  |
| <b>Installation position</b>  | Shaft horizontal or rotor on bottom; rotor on top on request   |
| <b>Condensation drainage holes</b>  | None, open rotor   |
| <b>Mode</b>   | S1   |
| <b>Motor bearing</b>  | Ball bearing   |
| <b>Technical features</b>   | <ul style="list-style-type: none"> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul> |
| <b>EMC immunity to interference</b>   | According to EN 61000-6-2 (industrial environment)   |
| <b>EMC interference emission</b>  | According to EN 61000-6-4 (industrial environment)   |
| <b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b> | <= 3.5 mA  |
| <b>Motor protection</b>   | Locked-rotor protection  |
| <b>With cable</b>   | Variable   |
| <b>Protection class</b>   | I (with customer connection of protective earth)   |
| <b>Conformity with standards</b>  | EN 60335-1; CE   |




Product drawing

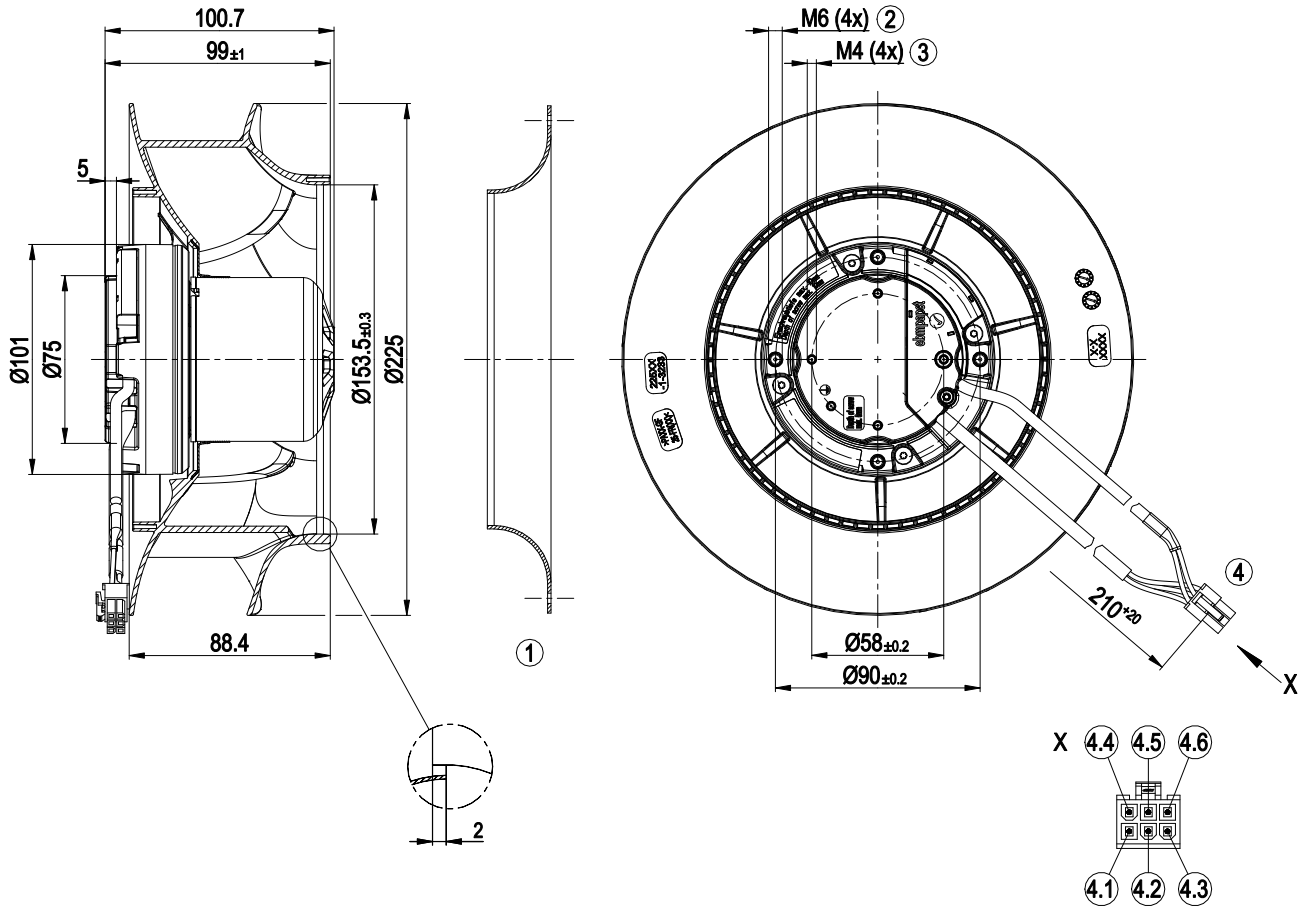

|     |   |
|-----|---|
| 1   | Accessory part: inlet ring 96358-2-4013 not included in scope of delivery               |
| 2   | Max. clearance for screw 10 mm  |
| 3   | Max. clearance for screw 5 mm   |
| 4   | Cable PVC AWG20/AWG22, 6-pole connector housing tyco 1586765-6, 5x socket tyco 794956-1 |
| 4.1 | L (black)   |
| 4.2 | N (blue)  |
| 4.3 | PE (green/yellow)   |
| 4.4 | 0-10 V PWM (yellow)   |
| 4.5 | GND (blue)  |
| 4.6 | not used  |




Accessory part

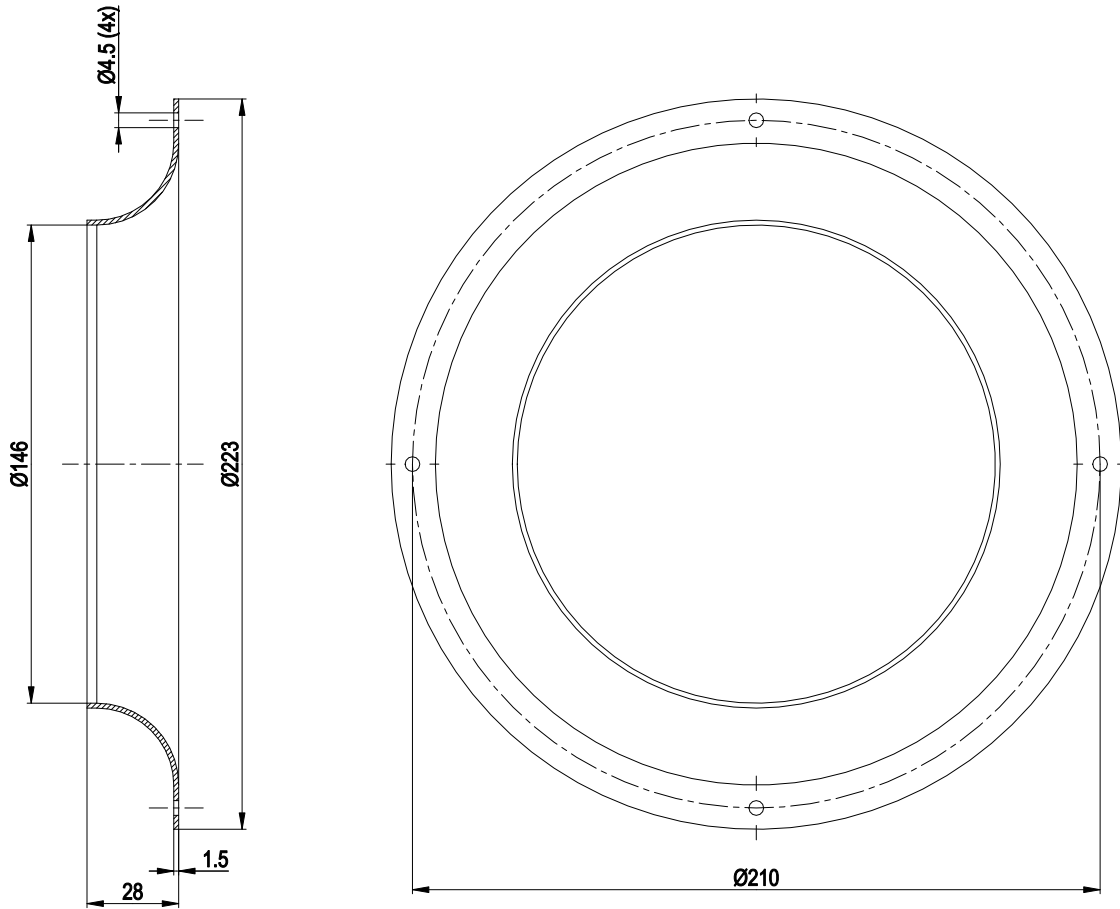

1 Accessory part: inlet ring 96358-2-4013 not included in scope of delivery




## Connection diagram

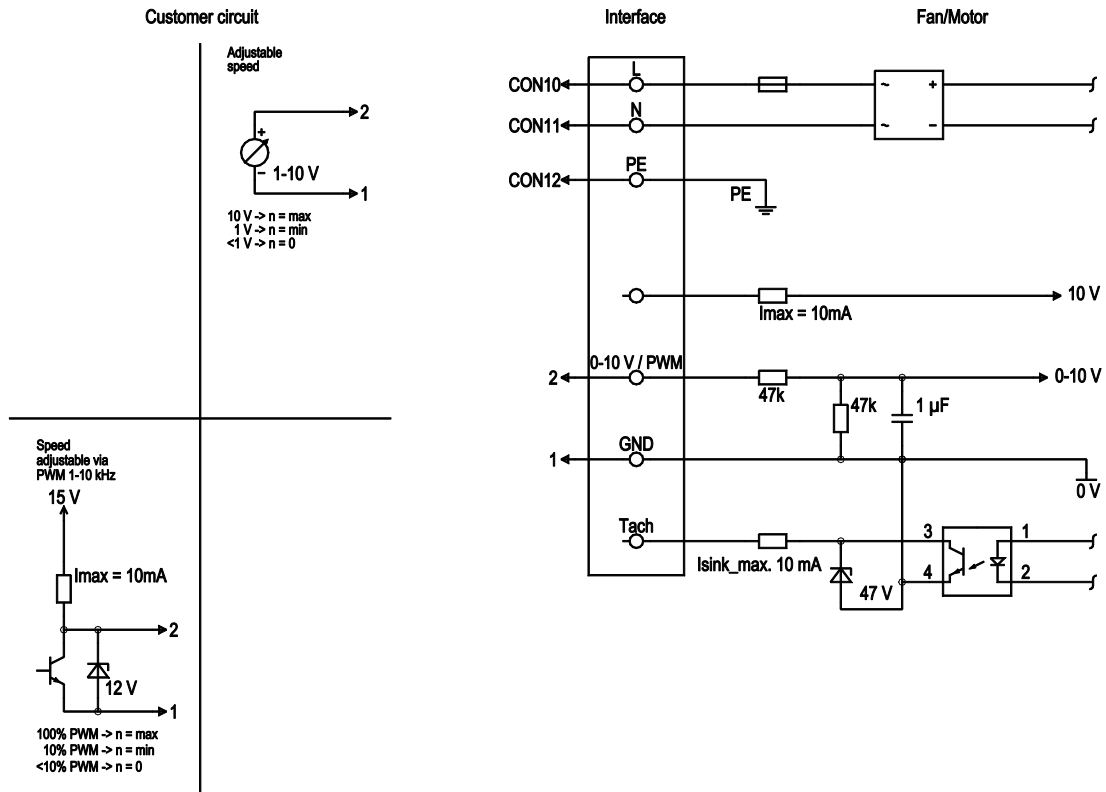

| No. | Conn. | Designation | Color        | Function/assignment   |
|-----|-------|-------------|--------------|---|
|     | CON10 | L           | black        | Supply connection, power supply, phase, see nameplate for voltage range             |
|     | CON11 | N           | blue         | Supply connection, power supply, neutral conductor, see nameplate for voltage range |
|     | CON12 | PE          | green/yellow | Ground connection   |
|     | 2     | 0- 10V PWM  | yellow       | 0-10 V / PWM control input, R <sub>i</sub> =100 kΩ, SELV                            |
|     | 1     | GND         | blue         | Reference ground for control interface, SELV  |



## Curves: Air performance 50 Hz

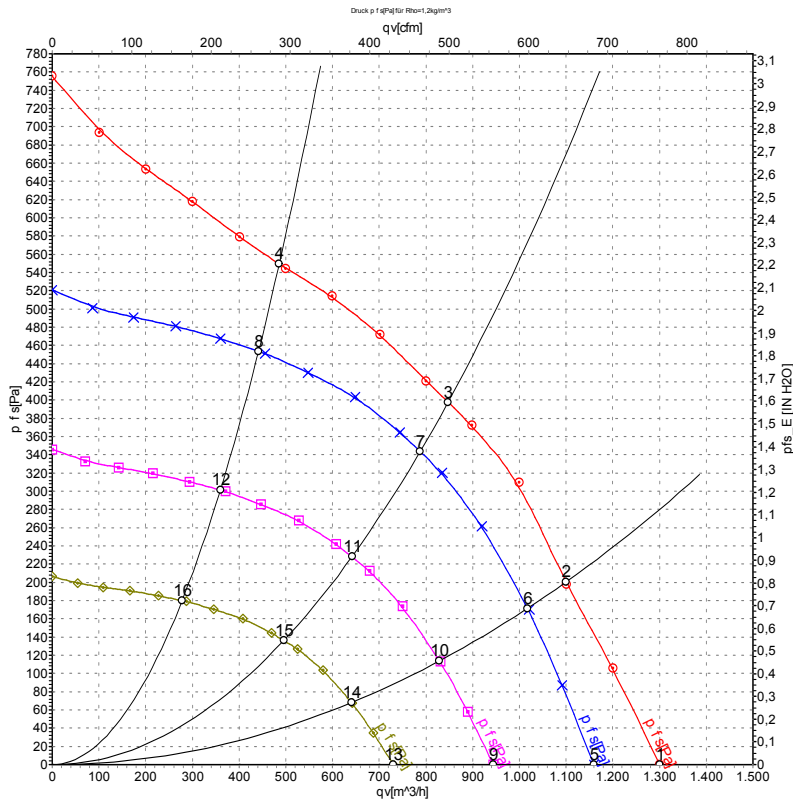

Measurement: LU-129100-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub>    |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|--------------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1  | 230 | 50 | 3030              | 151             | 1.25 | 70                | 78                | 1300              | 0               | 765            | 0.00               |
| 2  | 230 | 50 | 2910              | 168             | 1.40 | 66                | 74                | 1100              | 200             | 645            | 0.80               |
| 3  | 230 | 50 | 2860              | 170             | 1.40 | 60                | 68                | 850               | 400             | 500            | 1.61               |
| 4  | 230 | 50 | 2970              | 157             | 1.35 | 65                | 73                | 485               | 550             | 285            | 2.21               |
| 5  | 230 | 50 | 2700              | 107             | 0.89 | 68                | 76                | 1160              | 0               | 680            | 0.00               |
| 6  | 230 | 50 | 2700              | 134             | 1.11 | 65                | 72                | 1015              | 174             | 600            | 0.70               |
| 7  | 230 | 50 | 2700              | 135             | 1.15 | 59                | 67                | 790               | 344             | 465            | 1.38               |
| 8  | 230 | 50 | 2700              | 118             | 1.01 | 62                | 70                | 440               | 454             | 260            | 1.82               |
| 9  | 230 | 50 | 2200              | 58              | 0.48 | 63                | 70                | 945               | 0               | 555            | 0.00               |
| 10 | 230 | 50 | 2200              | 73              | 0.60 | 59                | 67                | 830               | 115             | 490            | 0.46               |
| 11 | 230 | 50 | 2200              | 73              | 0.62 | 54                | 62                | 640               | 228             | 380            | 0.92               |
| 12 | 230 | 50 | 2200              | 64              | 0.55 | 57                | 65                | 360               | 301             | 210            | 1.21               |
| 13 | 230 | 50 | 1700              | 27              | 0.22 | 56                | 64                | 730               | 0               | 430            | 0.00               |
| 14 | 230 | 50 | 1700              | 33              | 0.28 | 53                | 61                | 640               | 69              | 375            | 0.28               |
| 15 | 230 | 50 | 1700              | 34              | 0.29 | 48                | 56                | 495               | 136             | 290            | 0.55               |
| 16 | 230 | 50 | 1700              | 29              | 0.25 | 50                | 59                | 280               | 180             | 165            | 0.72               |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

