

R3G250-RN46-11 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	R3G250-RN46-11	
Motor	M3G074-CF	
Nominal voltage	VDC	24
Nominal voltage range	VDC	16 .. 28
Method of obtaining data		fa
Status		prelim.
Speed (rpm)	min <sup>-1</sup>	2850
Power consumption	W	175
Current draw	A	7.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	59.6	44.4	09 Power consumption $P_e$	kW	0.21
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	905
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	441
04 Efficiency grade N		77.2	62	10 Speed (rpm) n	min <sup>-1</sup>	2795
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_s / 100\,000\text{ Pa}$ 

LU-164291


The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).  
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.  
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



### Technical description

<b>Weight</b>	2.08 kg
<b>Size</b>	250 mm
<b>Motor size</b>	74
<b>Rotor surface</b>	Painted black
<b>Impeller material</b>	PP plastic
<b>Number of blades</b>	7
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP44; installation- and position-dependent
<b>Insulation class</b>	"B"
<b>Moisture (F) / Environmental (H) protection class</b>	H1
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Shaft horizontal or rotor on top; rotor on bottom on request
<b>Condensation drainage holes</b>	None
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Tach output</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Overvoltage detection</li> <li>- Reverse polarity protection</li> </ul>
<b>Electrical hookup</b>	Connector with cable
<b>With cable</b>	Variable
<b>Conformity with standards</b>	EN 60034-1; EN 60204-1; EN 60335-1; CE; UKCA


Product drawing

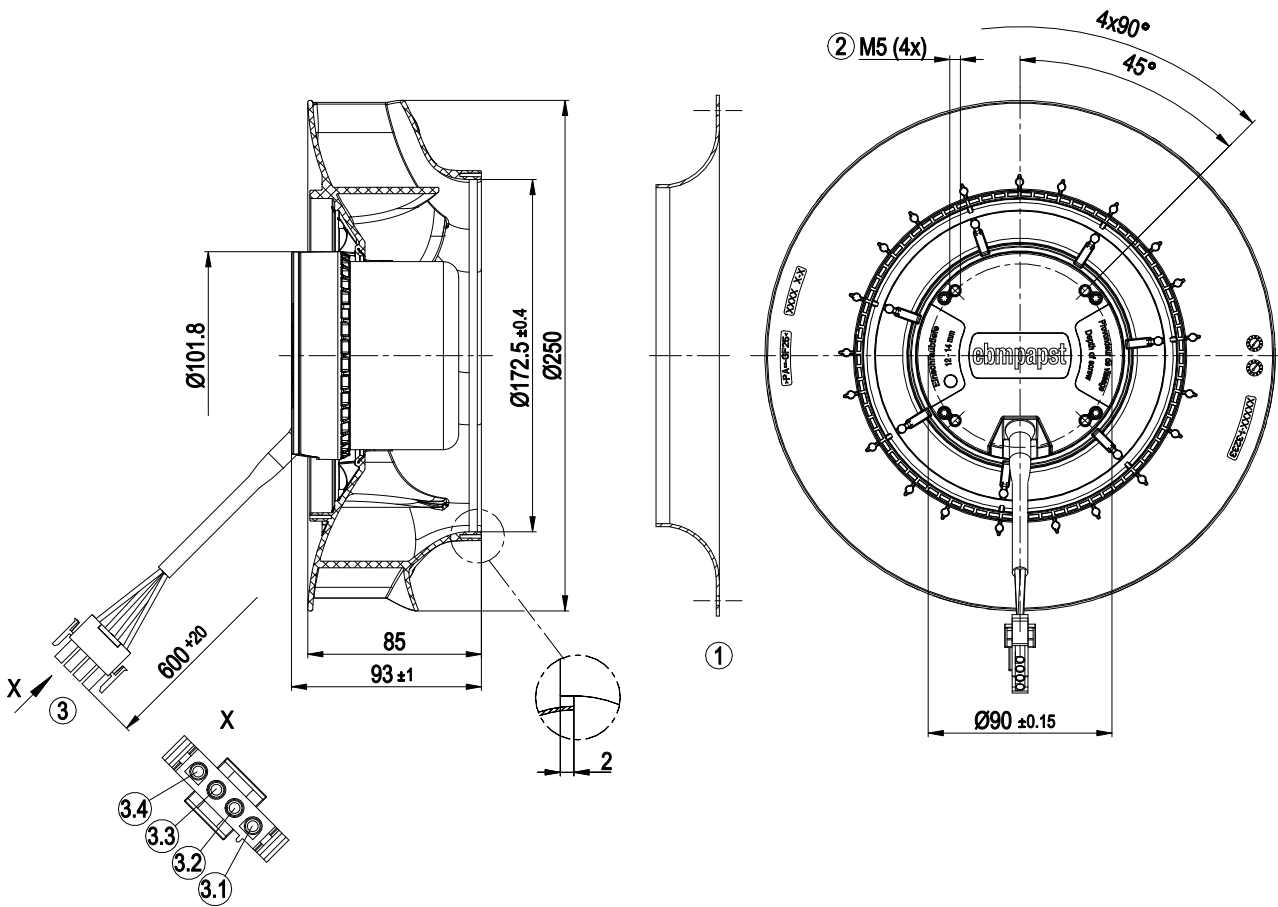

1	Accessory part: inlet ring 96359-2-4013 not included in scope of delivery
2	Max. screw-in depth 12 - 14 mm
3	Cable PVC AWG16 4-pole connector housing TE 1-480702-0, 4x plug pin TE 926882-1
3.1	UN +24 VDC
3.2	0-10 VDC
3.3	Tach
3.4	GND




## Accessory part

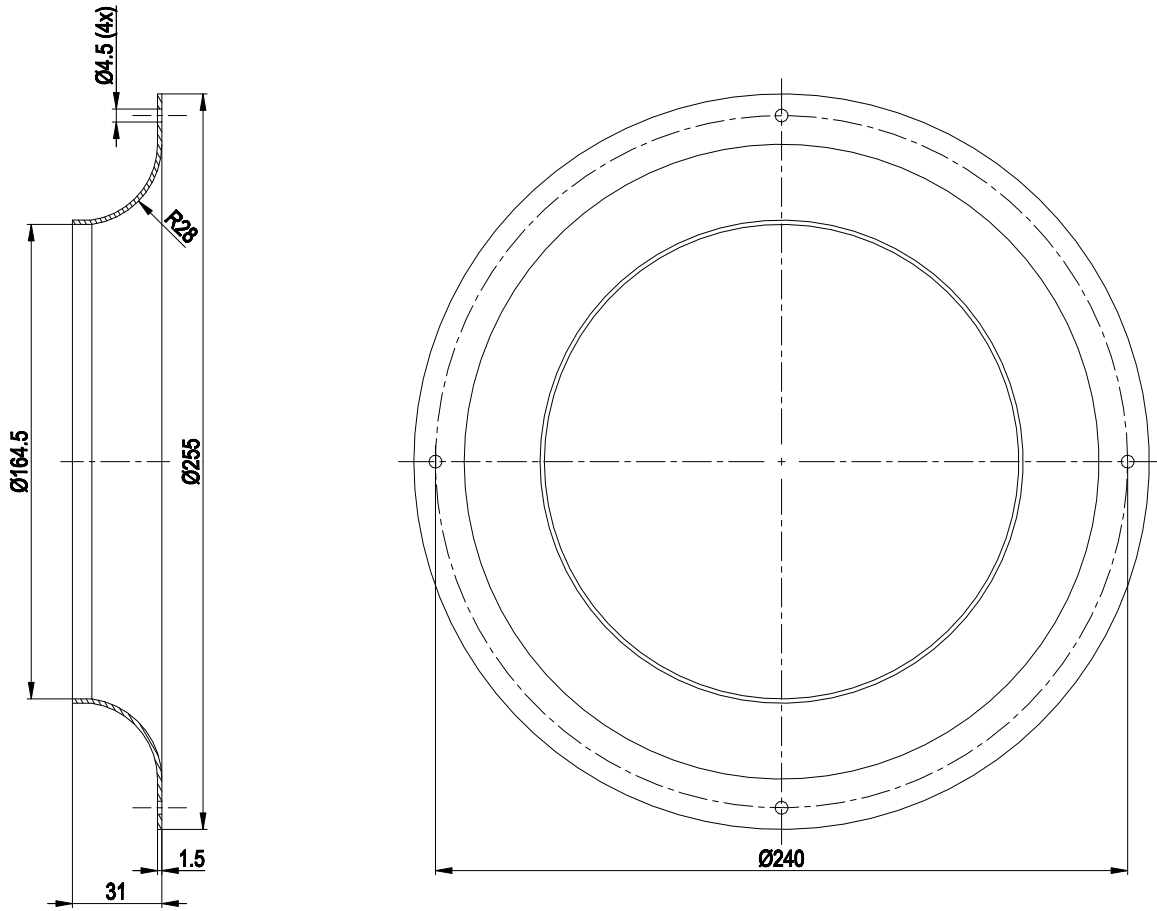

Inlet ring 96359-2-4013


## Connection diagram

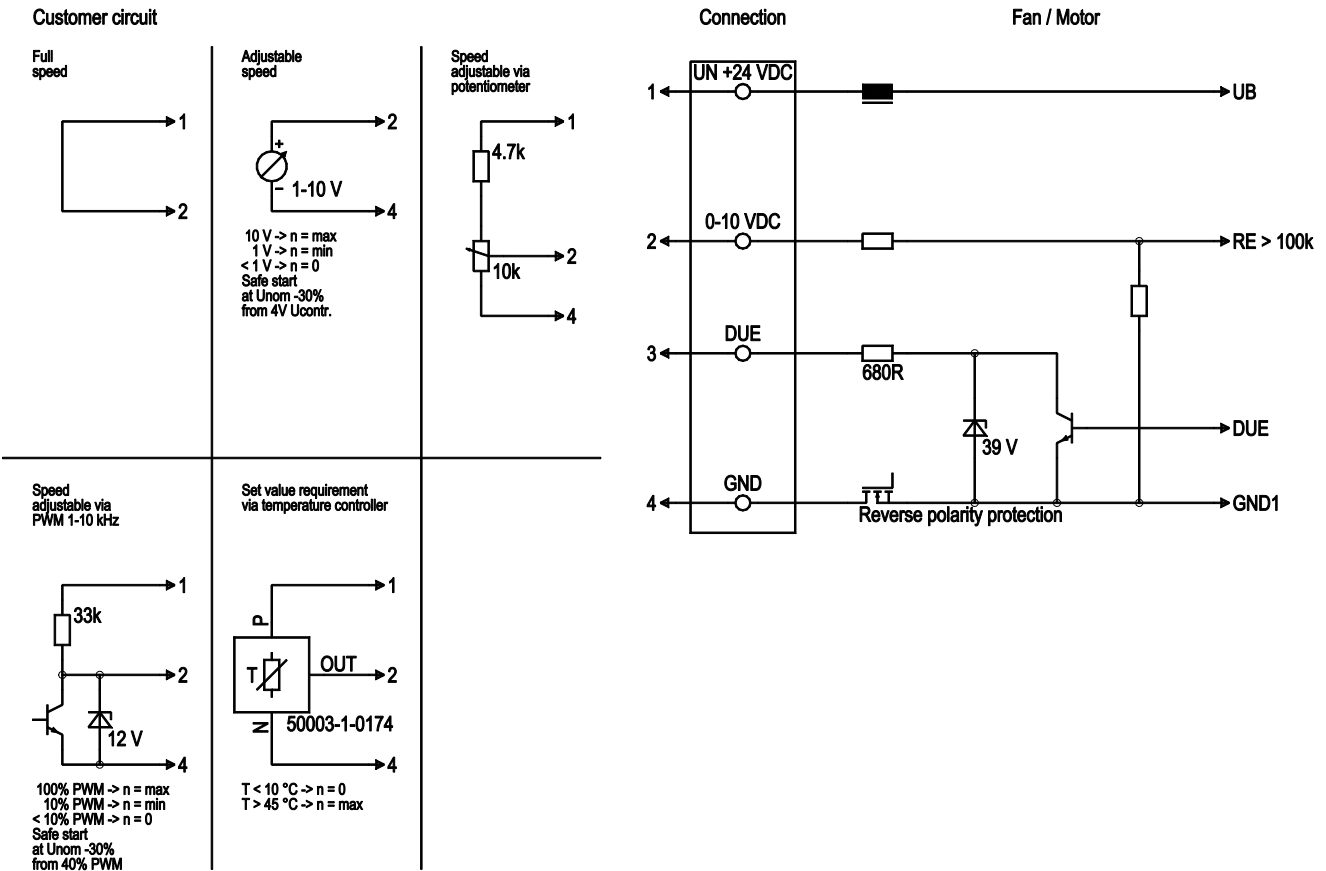

No.	Conn.	Designation	Color	Function/assignment
	1	Un +24 VDC	red	Power supply 24 VDC, maximum ripple 3.5%
	2	0-10 VDC	yellow	Control input Re > 100k
	3	Tach	white	Tach output, 3 pulses per revolution, Isink max = 10 mA
	4	GND	blue	Reference ground



## Curves: Air performance

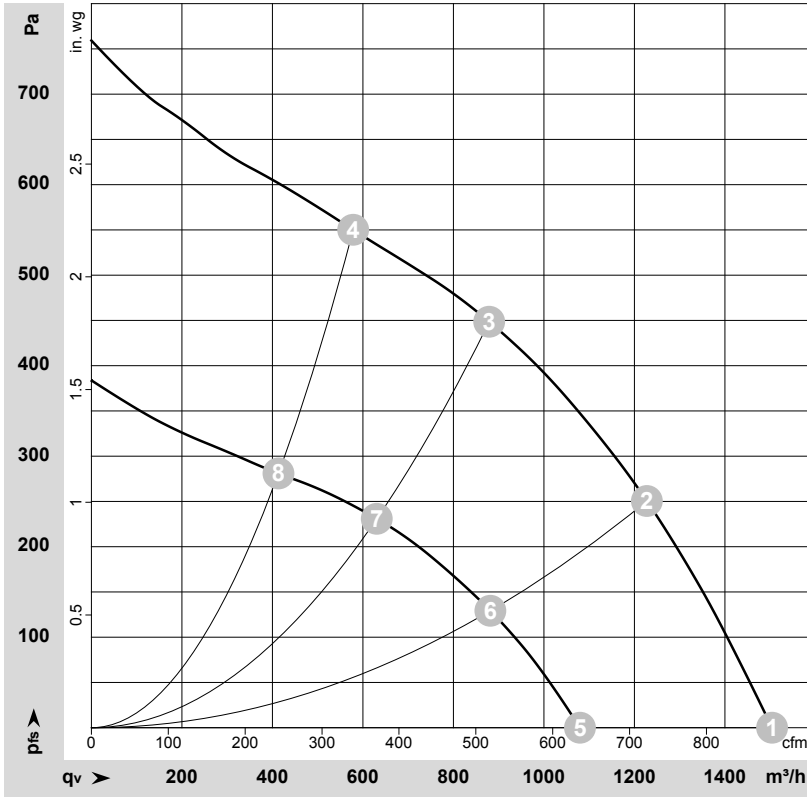

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-164291-1  
Measurement: LU-164393-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	24-28	2850	175	7.20*	74	81	1505	0	885	0.00
2	24-28	2820	195	8.10*	69	77	1225	250	720	1.00
3	24-28	2795	210	8.70*	63	71	880	450	515	1.81
4	24-28	2840	197	8.20*	66	74	580	550	340	2.21
5	16	2065	68	4.26			1080	0	635	0.00
6	16	2035	75	4.70			880	130	520	0.52
7	16	2025	81	5.04			630	231	370	0.93
8	16	2040	75	4.67			415	281	245	1.13

U = Voltage · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · \* = Current measured at nominal voltage · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

