

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications



R3G250-RR15-P2 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|-----------|
| Type | R3G250-RR15-P2 | |
| Motor | M3G084-DF | |
| Nominal voltage | VDC | 80 |
| Nominal voltage range | VDC | 50 .. 100 |
| Type of data definition | | ml |
| Speed (rpm) | min ⁻¹ | 3600 |
| Power input | W | 475 |
| Current draw | A | 5.9 |
| Min. ambient temperature | °C | -40 |
| Max. ambient temperature | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011 (EN 17166)

| | | Actual | Request 2015 | | | |
|-----------------------------------|---|--------|--------------|-------------------------------|-------------------|------|
| 01 Overall efficiency η_{es} | % | 55.2 | 48 | 09 Power input P_e | kW | 0.46 |
| 02 Measurement category | | A | | 09 Air flow q_v | m ³ /h | 1205 |
| 03 Efficiency category | | Static | | 09 Pressure increase p_{fs} | Pa | 694 |
| 04 Efficiency grade N | | 69.2 | 62 | 10 Speed (rpm) n | min ⁻¹ | 3615 |
| 05 Variable speed drive | | Yes | | 11 Specific ratio* | | 1.01 |

Data definition with optimum efficiency.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-205550

The indicated efficiency values for obtaining conformity with the Ecodesign Directive EU 327/2011 were achieved with defined air conduction components (e.g. inlet nozzles). The dimensions are to be requested from ebm-papst. If other air guide geometries are used on the installation side, the ebm-papst evaluation loses its validity/conformity must be confirmed again. The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2(2a) (motors completely integrated into a product).




Technical features

| | |
|---|--|
| Mass | 4.1 kg |
| Size | 250 mm |
| Motor size | 84 |
| Surface of rotor | Coated in black |
| Material of electronics housing | Die-cast aluminium |
| Material of impeller | PA UL94 V0 plastic |
| Number of blades | 7 |
| Direction of rotation | Clockwise, seen on rotor |
| Type of protection | IP55 |
| Insulation class | "F" |
| Humidity (F) / environmental protection class (H) | H3 |
| Max. permissible ambient motor temp. (transp./ storage) | +80 °C |
| Min. permissible ambient motor temp. (transp./storage) | -40 °C |
| Mounting position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes | Rotor-side |
| Operation mode | S1 |
| Motor bearing | Ball bearing; (sealed) |
| Technical features | <ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Alarm relay - Run monitoring - Motor current limit - RS485 MODBUS RTU - Soft start -Maximum EEPROM write cycles 100,000 - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected motor - Line undervoltage detection |
| EMC directives | According to EN 50121-3-2 |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Cable exit | Lateral |
| Safety classification | <p>I; If a protective earth is connected by the customer</p> <p>This component to be built-in can have several local protection class ratings. The specification refers to the basic design of this component.</p> <p>The final protection class is based on the intended installation and connection of the component.</p> |
| Product conforming to standard | EN 15085-1, CPC3: 2007; EN 45545-2, HL3: 2013; EN 50155: 2008; EN 61373, Cat. 1B: 2010; CE |
| Approval | EAC |
| Remark | <p>If voltage (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation, meaning they only have basic insulation</p> <p>The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay; EMC regulation: EN 50121-3-2 in preparation</p> |

EC centrifugal fan - RadiCal

backward curved, single inlet
for railway applications

Product drawing

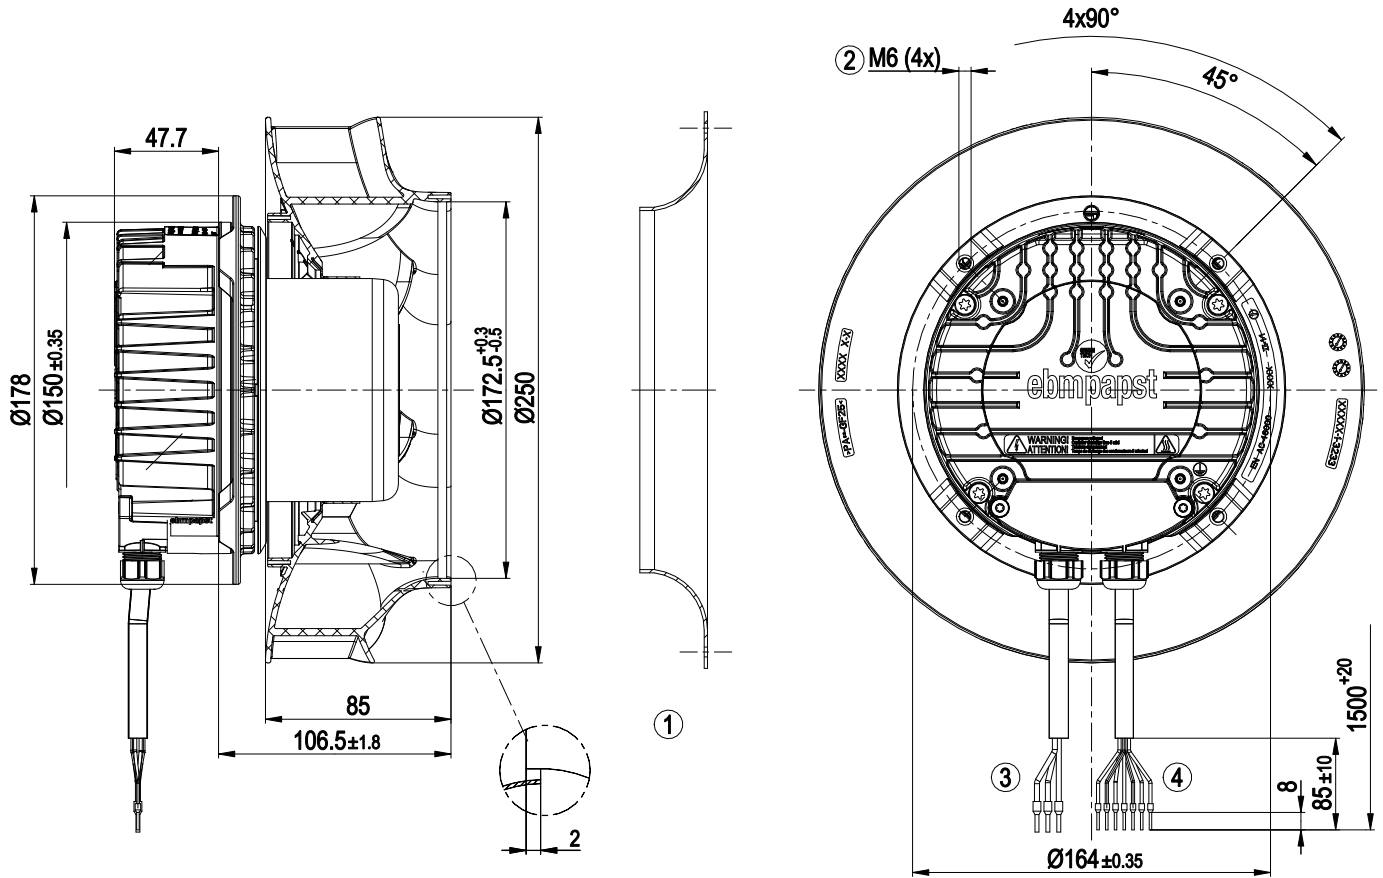


| | |
|---|--|
| 1 | Accessory part: Inlet nozzle 96420-2-4013 (not included in scope of delivery) |
| 2 | Thread reach max. 16 mm |
| 3 | Connection line, halogen-free, railway application EN 45545, 4G 1.5 mm ² 3x core-end sleeve, 1x lead not brought out |
| 4 | Connection line, halogen-free, railway application EN 45545, 7x 0.5 mm ² 7x core-end sleeve |

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Accessory part

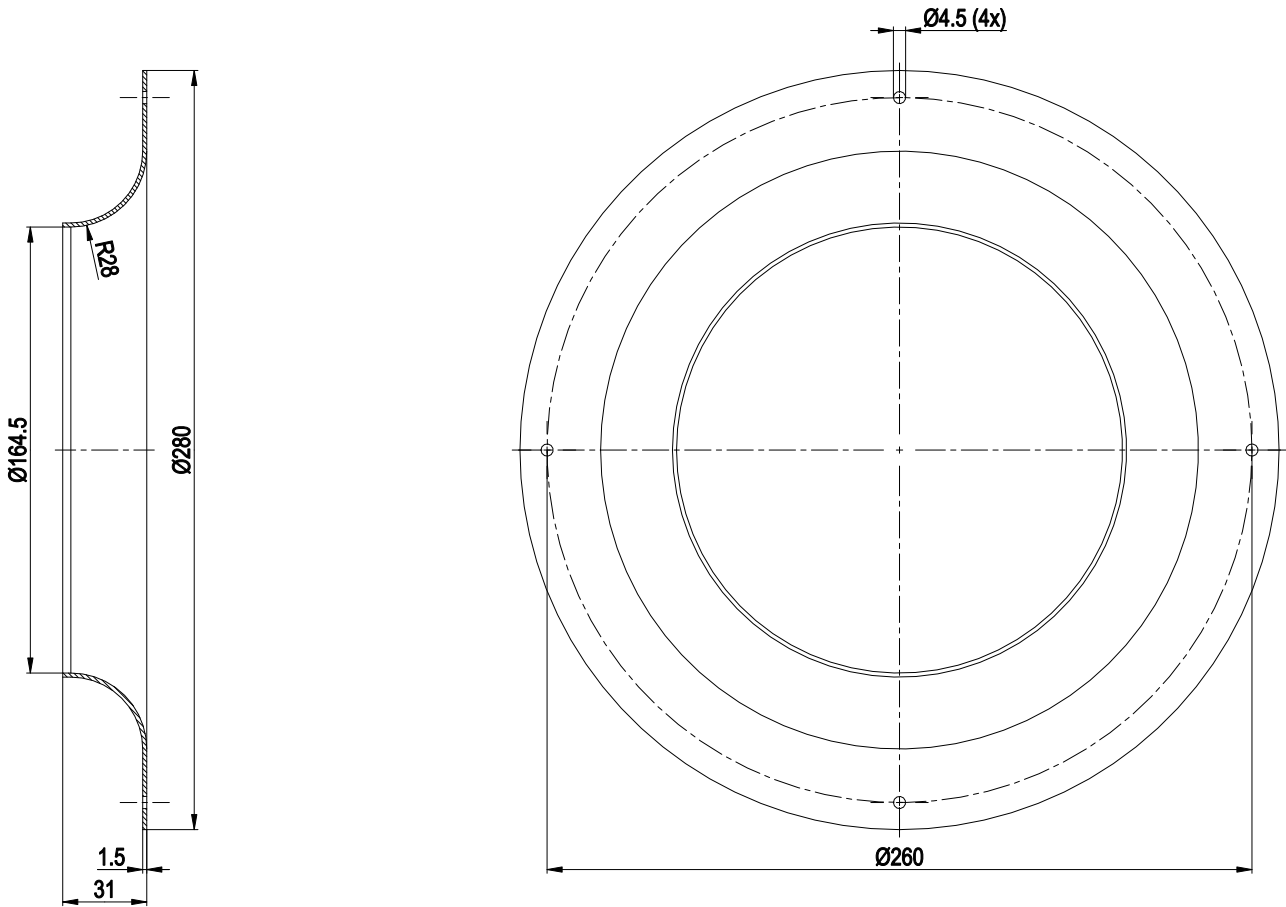

Inlet nozzle 96420-2-4013




EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications


Connection screen

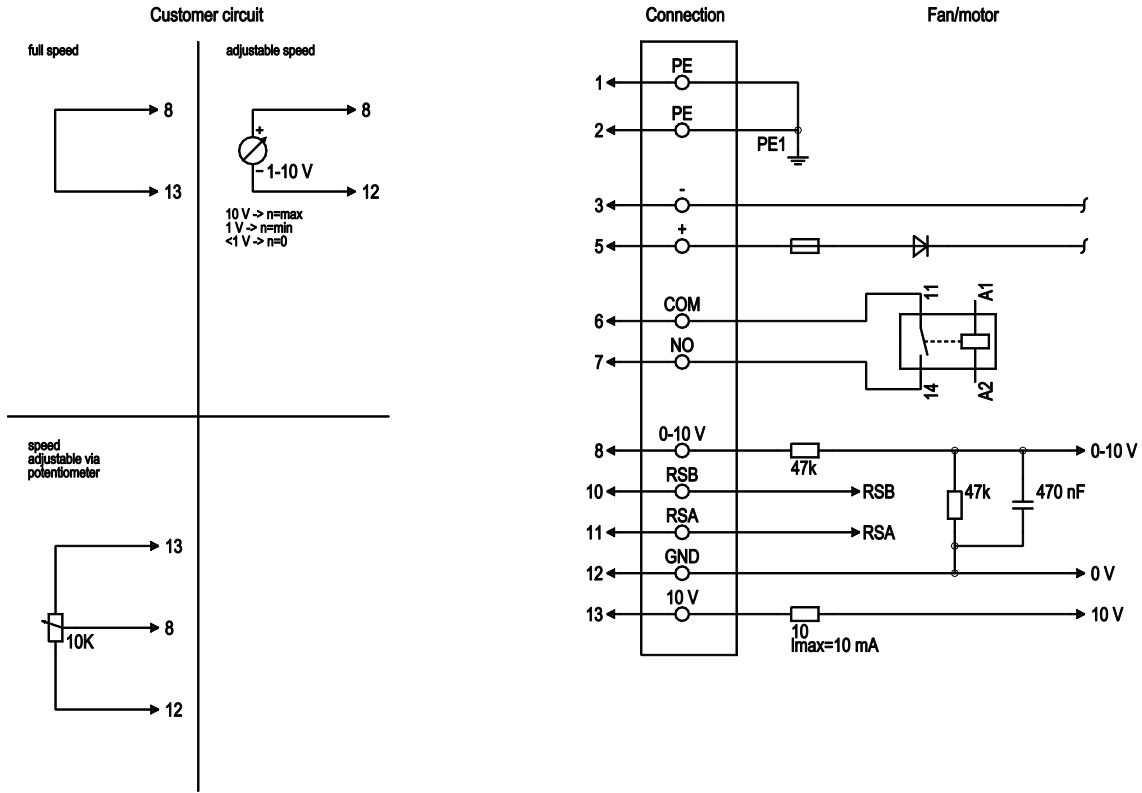

| No. | Conn. | Designation | Colour | Function / assignment |
|-----|-------|-------------|--------------|---|
| 1 | 1 | PE | green/yellow | Protective earth |
| 1 | 2 | PE | - | not brought out via lead |
| 1 | 3 | - | black | Power supply, GND, see type plate for voltage range |
| 1 | 5 | + | brown | Power supply, see type plate for voltage range |
| 2 | 6 | COM | grey | Status relay, floating status contact, common connection, contact rating 250 VAC/ 30 VDC max. 2 A (AC1), min. 1 mA/5 VDC, reinforced insulation with respect to control interface, basic insulation on mains side in accordance with EN 50124-1 |
| 2 | 7 | NO | orange | Status relay, floating status contact, make contact, contact rating 250 VAC/30 VDC max. 2 A (AC1), min. 1 mA/5 VDC, reinforced insulation with respect to control interface, basic insulation on mains side in accordance with EN 50124-1 |
| 2 | 8 | 0-10 V | yellow | Analogue input (set value) SELV, 0-10 V, R _i =100kΩ, parametrisable curve |
| 2 | 10 | RSB | brown | RS 485 interface for MODBUS, RSB; SELV, bus termination resistor provided by customer |
| 2 | 11 | RSA | white | RS 485 interface for MODBUS, RSA; SELV, bus termination resistor provided by customer |
| 2 | 12 | GND | blue | Reference ground for control interface; SELV |
| 2 | 13 | +10 V | red | Fixed voltage output 10 VDC, SELV, +10 V +/-3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometers) |



Charts: Air flow

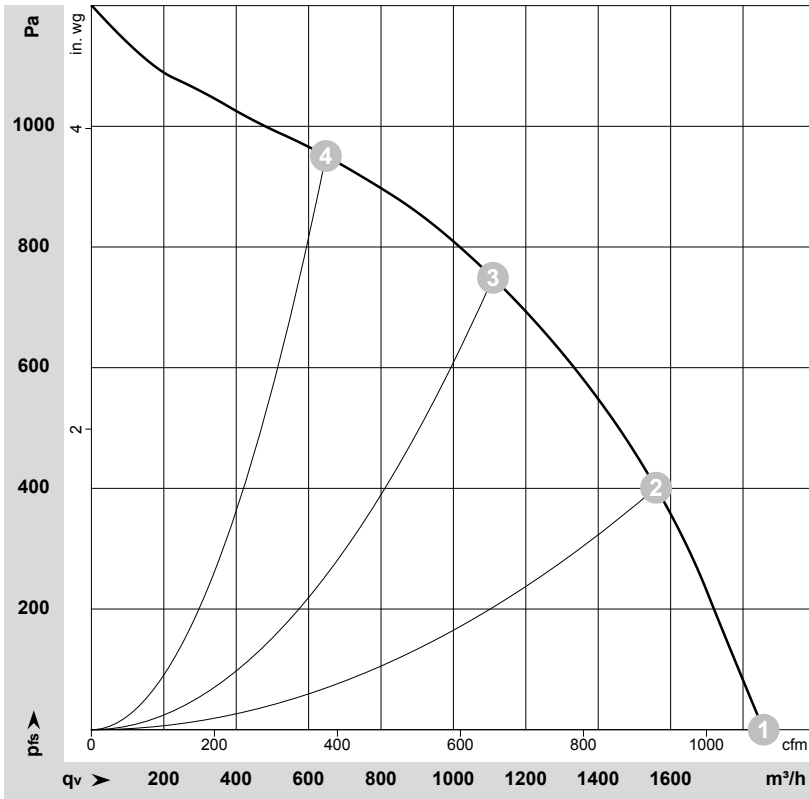

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-205550-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | n | P _{ed} | I | q _v | p _{fs} | q _v | p _{fs} |
|---|----|-------------------|-----------------|------|-------------------|-----------------|----------------|-----------------|
| | V | min ⁻¹ | W | A | m ³ /h | Pa | cfm | in. wg |
| 1 | 80 | 3675 | 386 | 4.82 | 1855 | 0 | 1095 | 0.00 |
| 2 | 80 | 3640 | 433 | 5.41 | 1560 | 400 | 920 | 1.61 |
| 3 | 80 | 3600 | 475 | 5.90 | 1110 | 750 | 655 | 3.01 |
| 4 | 80 | 3655 | 418 | 5.22 | 650 | 950 | 380 | 3.81 |

U = Supply voltage · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

