

# EC centrifugal fan - RadiCal

backward-curved, single-intake  
for rail applications



**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                   |          |
|--------------------------|-------------------|----------|
| Type                     | R3G250-RU27-81    |          |
| Motor                    | M3G084-CF         |          |
| Nominal voltage          | VDC               | 26       |
| Nominal voltage range    | VDC               | 16 .. 32 |
| Method of obtaining data |                   | fa       |
| Speed (rpm)              | min <sup>-1</sup> | 3860     |
| Power consumption        | W                 | 410      |
| Current draw             | A                 | 15.8     |
| Min. ambient temperature | °C                | -40      |
| Max. ambient temperature | °C                | 70       |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change




## Technical description

|                                                            |                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                     | 2.7 kg                                                                                                                                                                                                                                                                                                                                                                           |
| Size                                                       | 250 mm                                                                                                                                                                                                                                                                                                                                                                           |
| Motor size                                                 | 84                                                                                                                                                                                                                                                                                                                                                                               |
| Rotor surface                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                    |
| Electronics housing material                               | Die-cast aluminum, painted black                                                                                                                                                                                                                                                                                                                                                 |
| Impeller material                                          | PA plastic, sheet-metal plate painted black                                                                                                                                                                                                                                                                                                                                      |
| Number of blades                                           | 7                                                                                                                                                                                                                                                                                                                                                                                |
| Direction of rotation                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                   |
| Degree of protection                                       | Motor IP24 KM, electronics IP6K9K (mating connector installed)                                                                                                                                                                                                                                                                                                                   |
| Insulation class                                           | "B"                                                                                                                                                                                                                                                                                                                                                                              |
| Moisture (F) / Environmental (H) protection class          | H3                                                                                                                                                                                                                                                                                                                                                                               |
| Max. permitted ambient temp. for motor (transport/storage) | +80 °C                                                                                                                                                                                                                                                                                                                                                                           |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C                                                                                                                                                                                                                                                                                                                                                                           |
| Installation position                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                     |
| Cooling hole/opening                                       | On rotor side                                                                                                                                                                                                                                                                                                                                                                    |
| Mode                                                       | S1                                                                                                                                                                                                                                                                                                                                                                               |
| Motor bearing                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                     |
| Technical features                                         | <ul style="list-style-type: none"> <li>- Error output (high-side switch)</li> <li>- Load dump (58 V)</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Temperature derating</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics</li> <li>- Line undervoltage detection</li> </ul> |
| EMC regulations                                            | According to EN 50121-3-2                                                                                                                                                                                                                                                                                                                                                        |
| Electrical hookup                                          | Standby current less than 500 µA                                                                                                                                                                                                                                                                                                                                                 |
| With cable                                                 | Lateral                                                                                                                                                                                                                                                                                                                                                                          |
| Protection class assignment                                | <p>III; Requires supply with safety extra-low voltage SELV.</p> <p>This component for installation may have several local protection classes. This information relates to this component's basic design.</p> <p>The final protection class is based on the component's intended installation and connection.</p>                                                                 |
| Conformity with standards                                  | EN 15085-1, CPC3; EN 45545-2, HL3; EN 50155; EN 61373, Cat. 1B                                                                                                                                                                                                                                                                                                                   |
| Approval                                                   | EAC                                                                                                                                                                                                                                                                                                                                                                              |

# EC centrifugal fan - RadiCal

backward-curved, single-intake  
for rail applications

## Product drawing

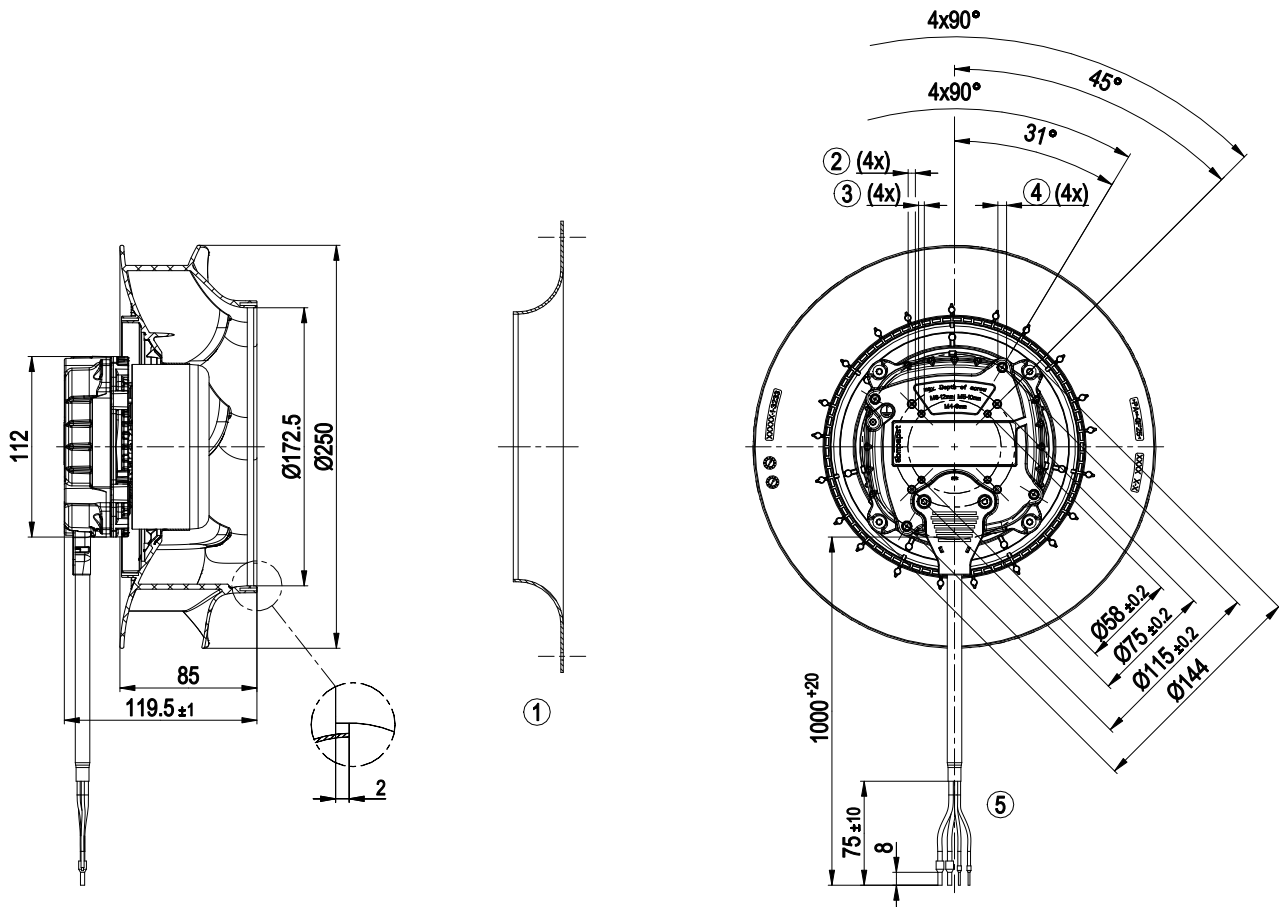


|   |                                                                             |
|---|-----------------------------------------------------------------------------|
| 1 | Accessory part: Inlet ring 96420-2-4013 (not included in scope of delivery) |
| 2 | Tapping hole prepared for self-tapping M5 screw, max. screw-in depth 10 mm  |
| 3 | Tapping hole prepared for self-tapping M4 screw, max. screw-in depth 8 mm   |
| 4 | Tapping hole prepared for self-tapping M6 screw, max. screw-in depth 12 mm  |
| 5 | Cable, halogen-free, railway application EN 45545, 2x 2.5 mm², 2x 1.0 mm²   |
|   | 4x wire-end ferrule                                                         |

# EC centrifugal fan - RadiCal

backward-curved, single-intake

for rail applications

## Accessory part

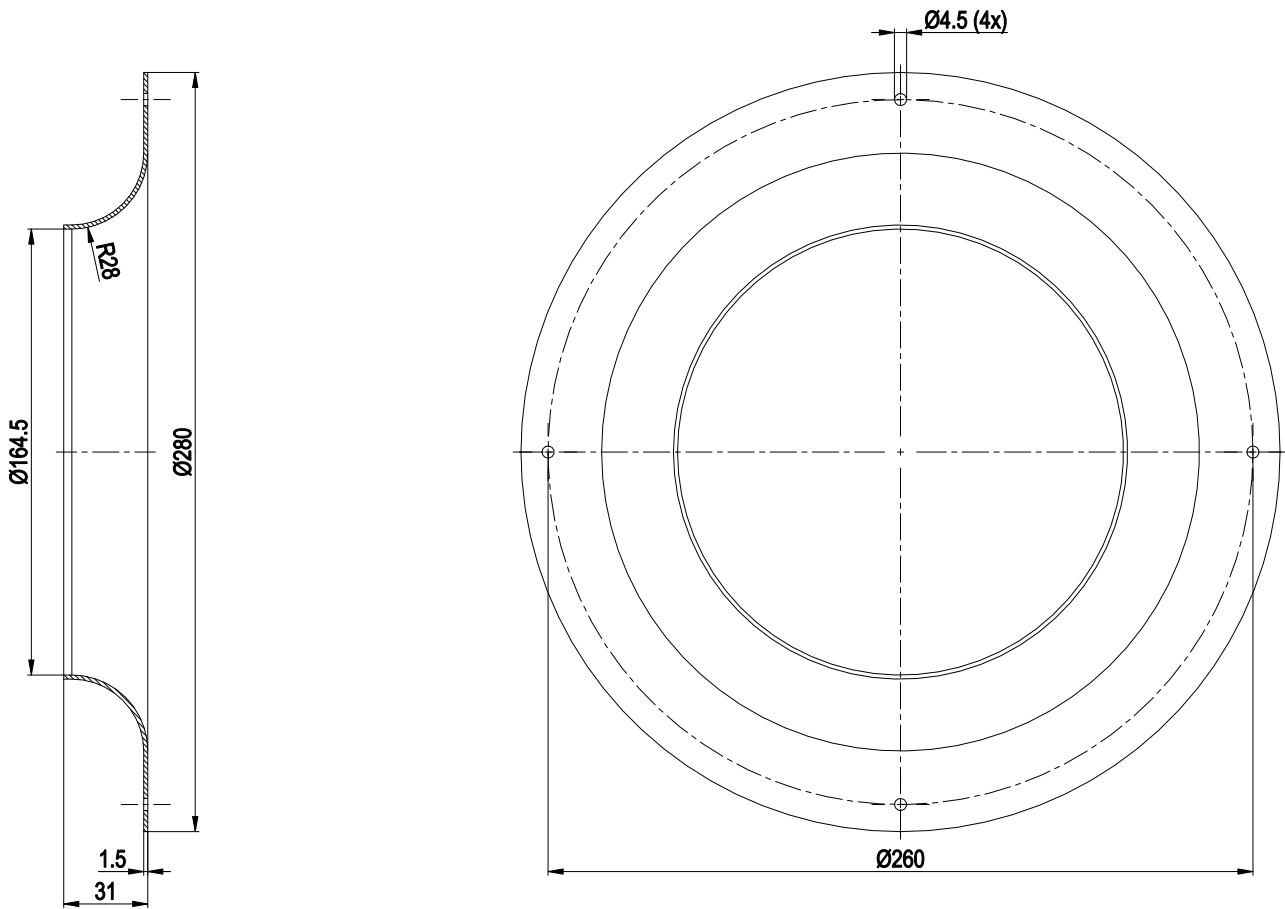


Inlet ring 96420-2-4013

# EC centrifugal fan - RadiCal

backward-curved, single-intake


for rail applications

## Connection diagram

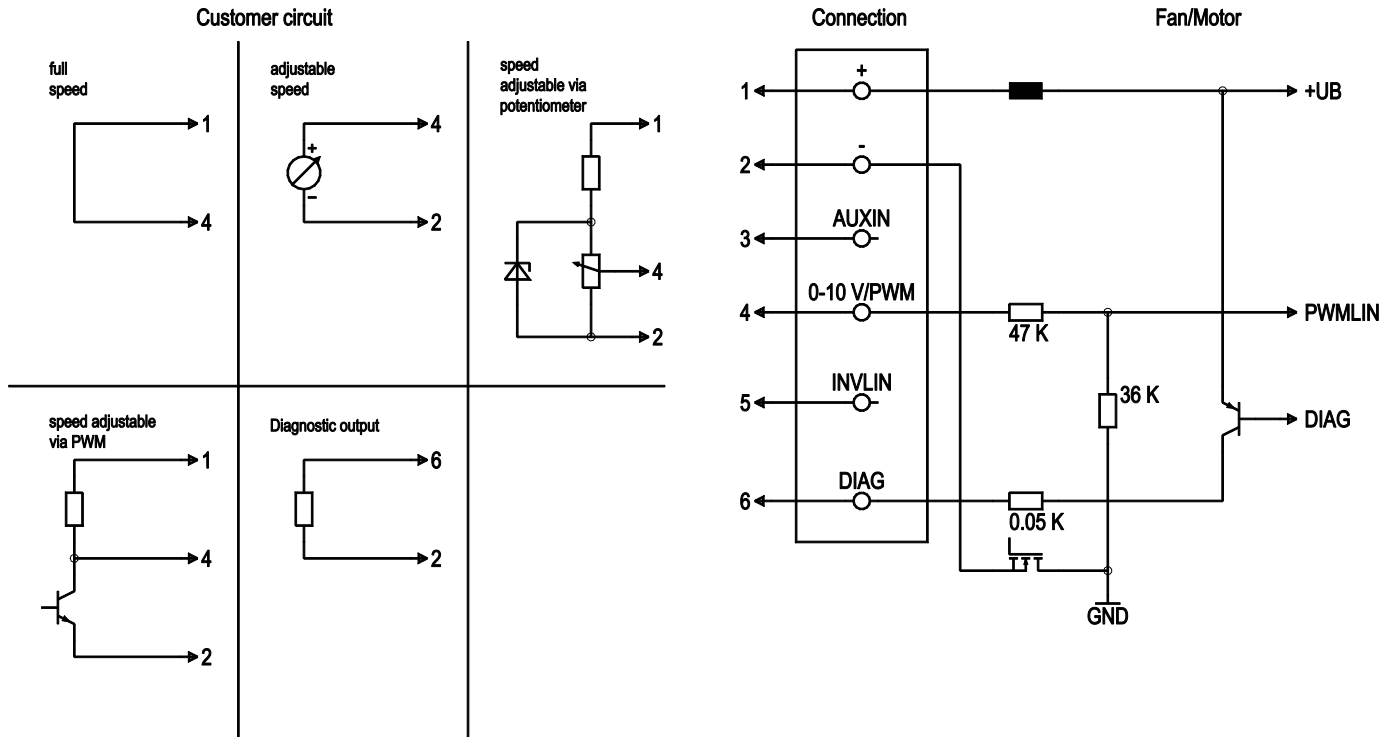

| No. | Conn. | Designation  | Color  | Function/assignment                                                                                                                                                                                                                                                                                                           |
|-----|-------|--------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|     | 1     | +            | black  | Power supply, see nameplate for voltage range                                                                                                                                                                                                                                                                                 |
|     | 2     | -            | brown  | Power supply, see nameplate for voltage range                                                                                                                                                                                                                                                                                 |
|     | 3     | AUXIN        |        | not used                                                                                                                                                                                                                                                                                                                      |
|     | 4     | 0-10 V / PWM | yellow | Control input: $R_i > 47 \text{ k}\Omega$<br>0-10 V (typ. $< 1 \text{ V} \rightarrow n=0$ ; $1.5 \text{ V} \rightarrow n=\text{min}$ ; $> 10 \text{ V} \rightarrow n=\text{max}$ )<br>PWM (amplitude 10 V; 1-50 kHz; typ. $< 5 \% \rightarrow n=0$ ; $15 \% \rightarrow n=\text{min}$ ; $> 100 \% \rightarrow n=\text{max}$ ) |
|     | 5     | INVLIN       |        | not used                                                                                                                                                                                                                                                                                                                      |
|     | 6     | DIAG         | white  | Diagnostic output: Open collector, $I_{\text{source max}} = 20 \text{ mA}$ ,<br>Fan OK $\rightarrow$ low; fan error $\rightarrow$ high                                                                                                                                                                                        |

## Curves: Air performance

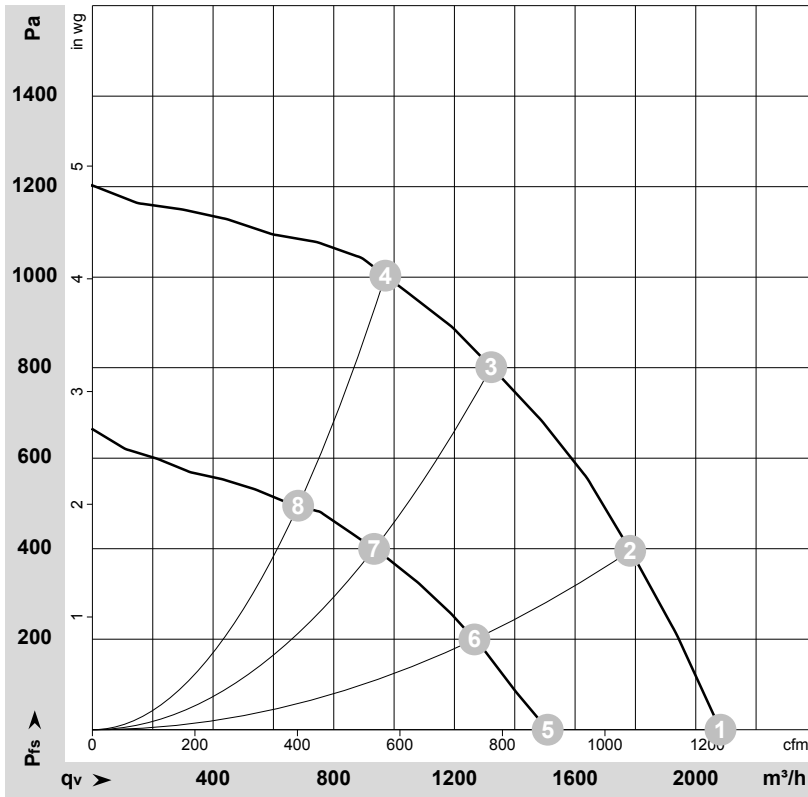

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-162027-1  
Measurement: LU-162195-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U     | n                 | P <sub>ed</sub> | I      | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|---|-------|-------------------|-----------------|--------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
|   | V     | min <sup>-1</sup> | W               | A      | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 26-32 | 3860              | 410             | 15.80* | 80                | 87                | 2080              | 0               | 1225           | 0.00            |
| 2 | 26-32 | 3860              | 513             | 19.80* | 78                | 85                | 1785              | 400             | 1050           | 1.61            |
| 3 | 26-32 | 3860              | 568             | 21.90* | 74                | 81                | 1320              | 800             | 780            | 3.21            |
| 4 | 26-32 | 3860              | 560             | 21.60* | 76                | 82                | 970               | 1000            | 570            | 4.01            |
| 5 | 16    | 2800              | 166             | 10.43  |                   |                   | 1510              | 0               | 890            | 0.00            |
| 6 | 16    | 2755              | 187             | 11.72  |                   |                   | 1265              | 200             | 745            | 0.80            |
| 7 | 16    | 2730              | 204             | 12.78  |                   |                   | 935               | 400             | 550            | 1.61            |
| 8 | 16    | 2730              | 197             | 12.39  |                   |                   | 680               | 495             | 400            | 1.99            |

U = Voltage · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · \* = Current measured at nominal voltage · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase