

R3G280-AC66-30

# EC centrifugal fan

backward-curved, single-intake



R3G280-AC66-30 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

Type	R3G280-AC66-30	
Motor	M3G084-CA	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 57
Method of obtaining data		fa
Speed (rpm)	min <sup>-1</sup>	2000
Power consumption	W	135
Current draw	A	2.85
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency $\eta_{es}$	%	53.1	43.7
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		71.4	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption $P_e$	kW	0.18
09 Air flow $q_v$	m <sup>3</sup> /h	1270
09 Pressure increase $p_{fs}$	Pa	250
10 Speed (rpm) n	min <sup>-1</sup>	1925
11 Specific ratio*		1.00

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$


LU-61034



## Technical description

<b>Weight</b>	3.3 kg
<b>Fan size</b>	280 mm
<b>Rotor surface</b>	Painted black
<b>Electronics housing material</b>	Die-cast aluminum
<b>Impeller material</b>	Sheet steel, galvanized
<b>Number of blades</b>	11
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP42
<b>Insulation class</b>	"B"
<b>Moisture (F) / Environmental (H) protection class</b>	H1
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Any
<b>Condensation drainage holes</b>	None
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Tach output</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Thermal overload protection for motor</li> </ul>
<b>EMC immunity to interference</b>	According to EN 61000-6-2 (industrial environment)
<b>EMC interference emission</b>	According to EN 55022 (Class B)
<b>Motor protection</b>	Thermal overload protector (TOP) internally connected
<b>With cable</b>	Variable
<b>Conformity with standards</b>	EN 60950-1; CE
<b>Approval</b>	CSA C22.2 No. 100; EAC; CCC; UL 1004-1

Product drawing


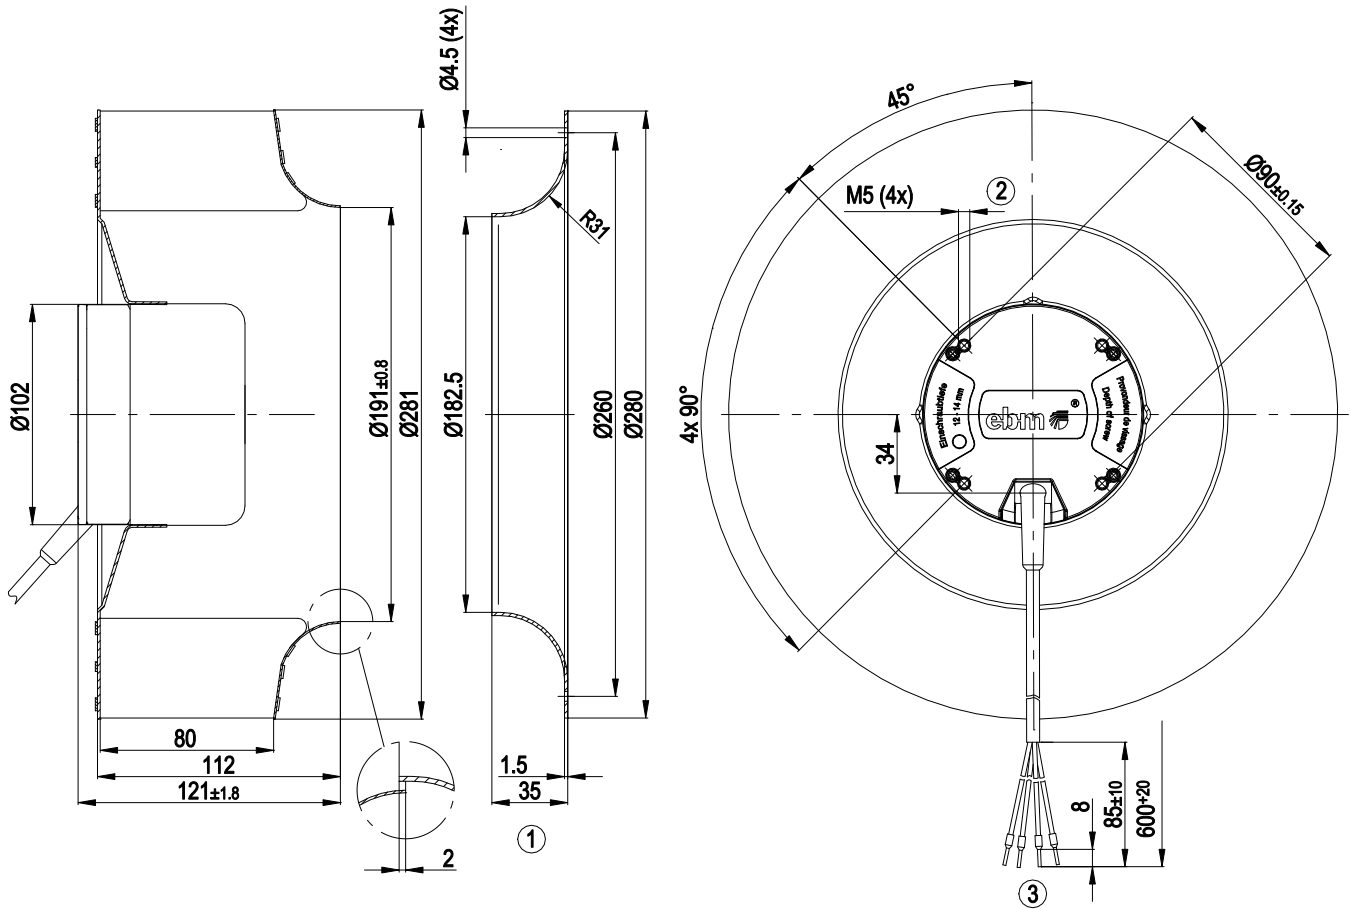


- |   |   |
|---|---|
| 1 | Accessory part: inlet ring 96360-2-4013 not included in scope of delivery |
| 2 | Clearance for screw 12-14 mm  |
| 3 | Cable PVC AWG16, 4x crimped ferrules                                      |


## Connection diagram

**Customer circuit**

**Application notes for various control options**

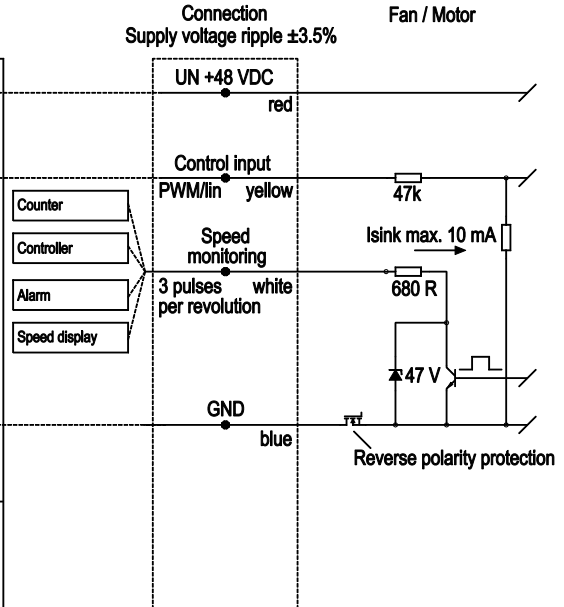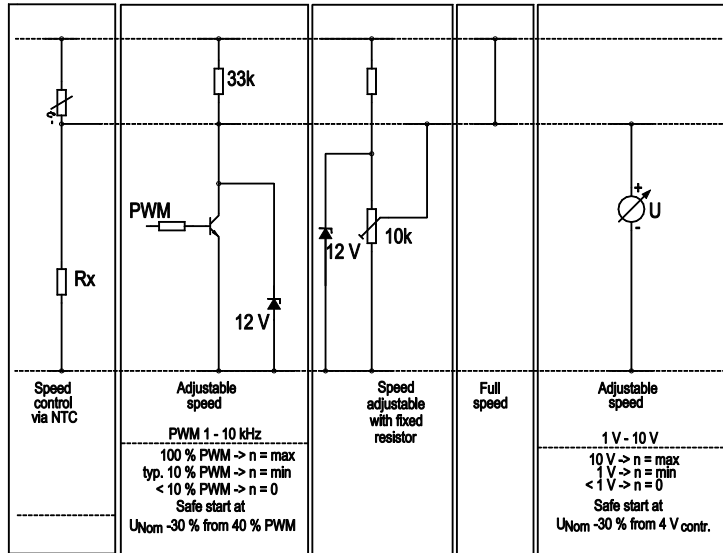

## Curves: Air performance

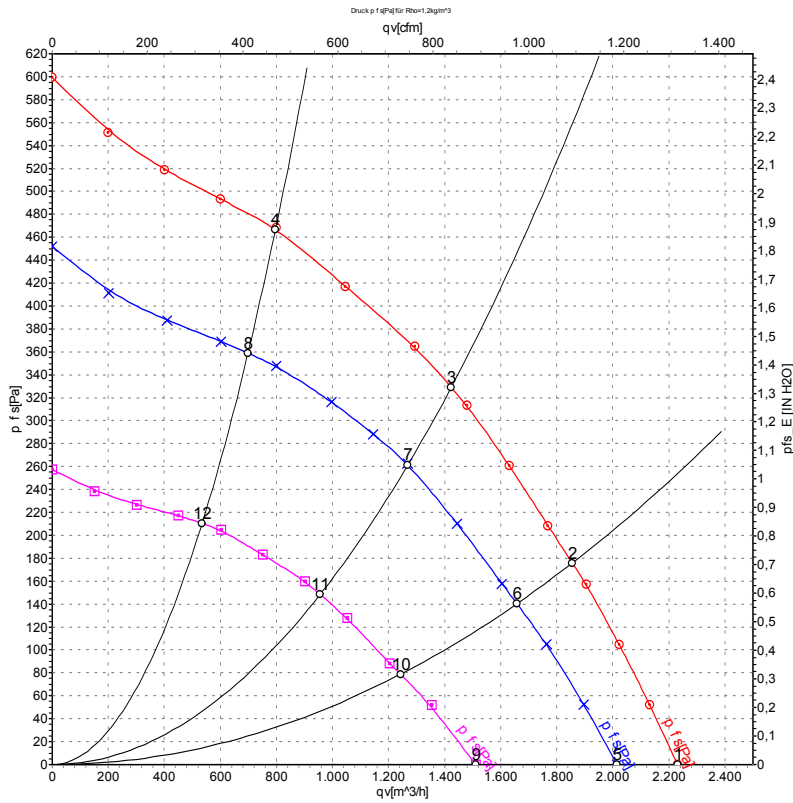

Measurement: LU-72884-1  
 Measurement: LU-61034-1  
 Measurement: LU-72885-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	n	P <sub>ed</sub>	I	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
	V	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	57	2305	212	3.74	2230	0	1315	0.00
2	57	2245	257	4.55	1855	176	1090	0.71
3	57	2210	281	4.97	1425	329	840	1.32
4	57	2270	242	4.27	795	469	470	1.88
5	48	2000	135	2.85	2015	0	1185	0.00
6	48	1955	173	3.64	1660	140	975	0.56
7	48	1920	185	3.80	1270	260	745	1.04
8	48	1980	160	3.35	700	360	410	1.45
9	36	1550	65	1.81	1510	0	890	0.00
10	36	1520	80	2.23	1245	79	730	0.32
11	36	1505	87	2.45	955	149	565	0.60
12	36	1530	75	2.09	535	210	315	0.84

U = Power supply · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

