

EC centrifugal fan - RadiPac

backward curved, single inlet

for railway applications

R3G280-BC01-N1 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142

Nominal data

Type	R3G280-BC01-N1	
Motor	M3G084-FA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	3140
Power input	W	940
Current draw	A	1.5
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features

Mass	6.9 kg
Size	280 mm
Motor size	84
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	Aluminium sheet
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP55
Insulation class	"F"
Humidity (F) / environmental protection class (H)	H3
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Alarm relay - Integrated PID controller - Run monitoring - Output limit - Motor current limit - Emergency operation - PFC, passive - RS485 MODBUS RTU - Soft start -Maximum EEPROM write cycles 100,000 - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
EMC directives	According to EN 50121-3-2
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Safety classification	<p>I; If a protective earth is connected by the customer</p> <p>This component to be built-in can have several local protection class ratings. The specification refers to the basic design of this component.</p> <p>The final protection class is based on the intended installation and connection of the component.</p>
Product conforming to standard	EN 15085-1, CPC3; EN 45545-2, HL3; EN 50155; EN 61373, Cat. 1B
Approval	EAC

EC centrifugal fan - RadiPac

backward curved, single inlet

for railway applications

Remark

A prerequisite for operation is a Class 1 vehicle electrical system architecture according to EN 50533; if voltage (e.g. 230 VAC) is passed through the alarm relay, the reinforced insulation property of the SELV signal wires will be lost and they will then only have basic insulation


The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay.



EC centrifugal fan - RadiPac

backward curved, single inlet
for railway applications

Product drawing

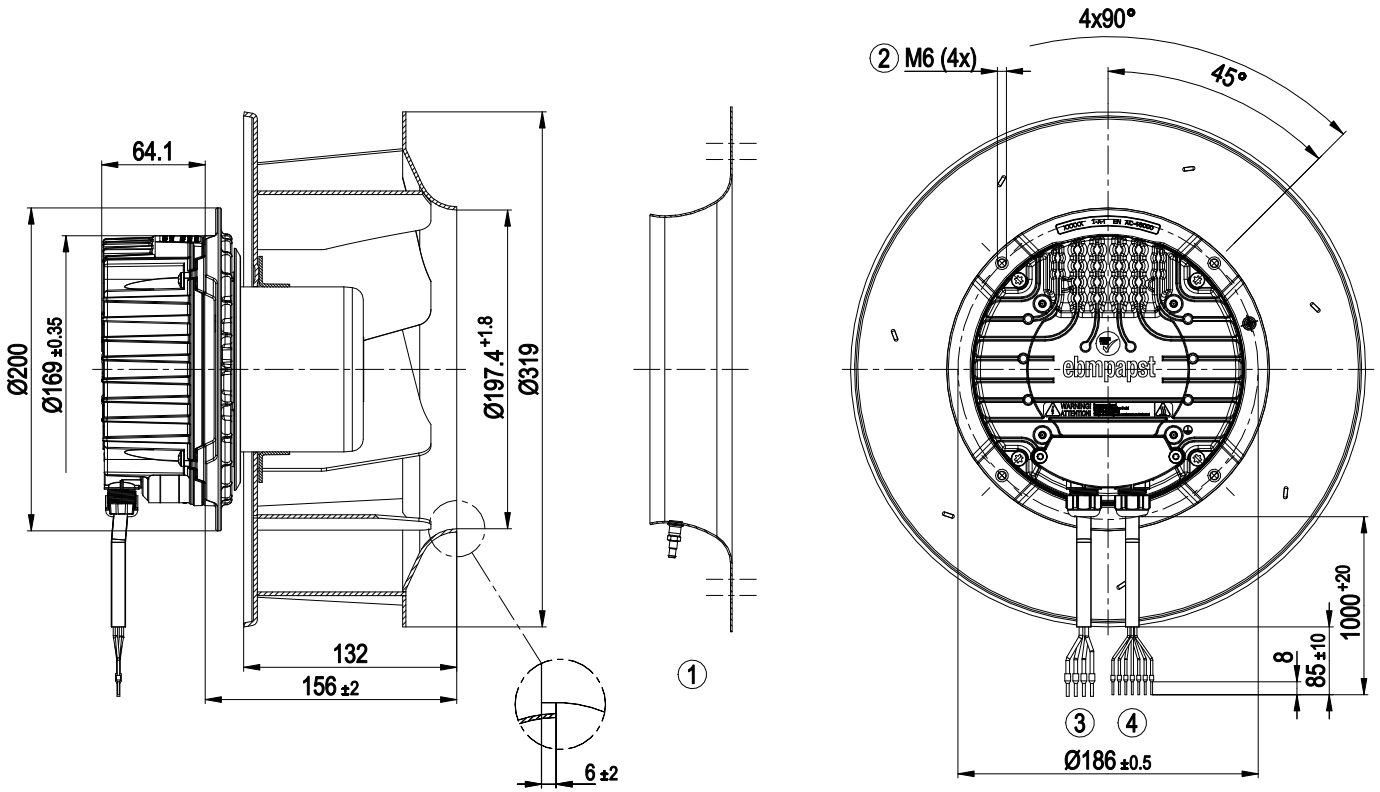

1	Accessory part: Inlet nozzle 28075-2-4013 with pressure tap (k-factor: 93) not included in scope of delivery
2	Thread reach max. 16 mm
3	Connection line, halogen-free, railway application EN 45545, 4G 1.5 mm ² 4x core-end sleeve
4	Connection line, halogen-free, railway application EN 45545, 7x 0.5 mm ² 7x core-end sleeve




EC centrifugal fan - RadiPac

backward curved, single inlet

for railway applications

Accessory part

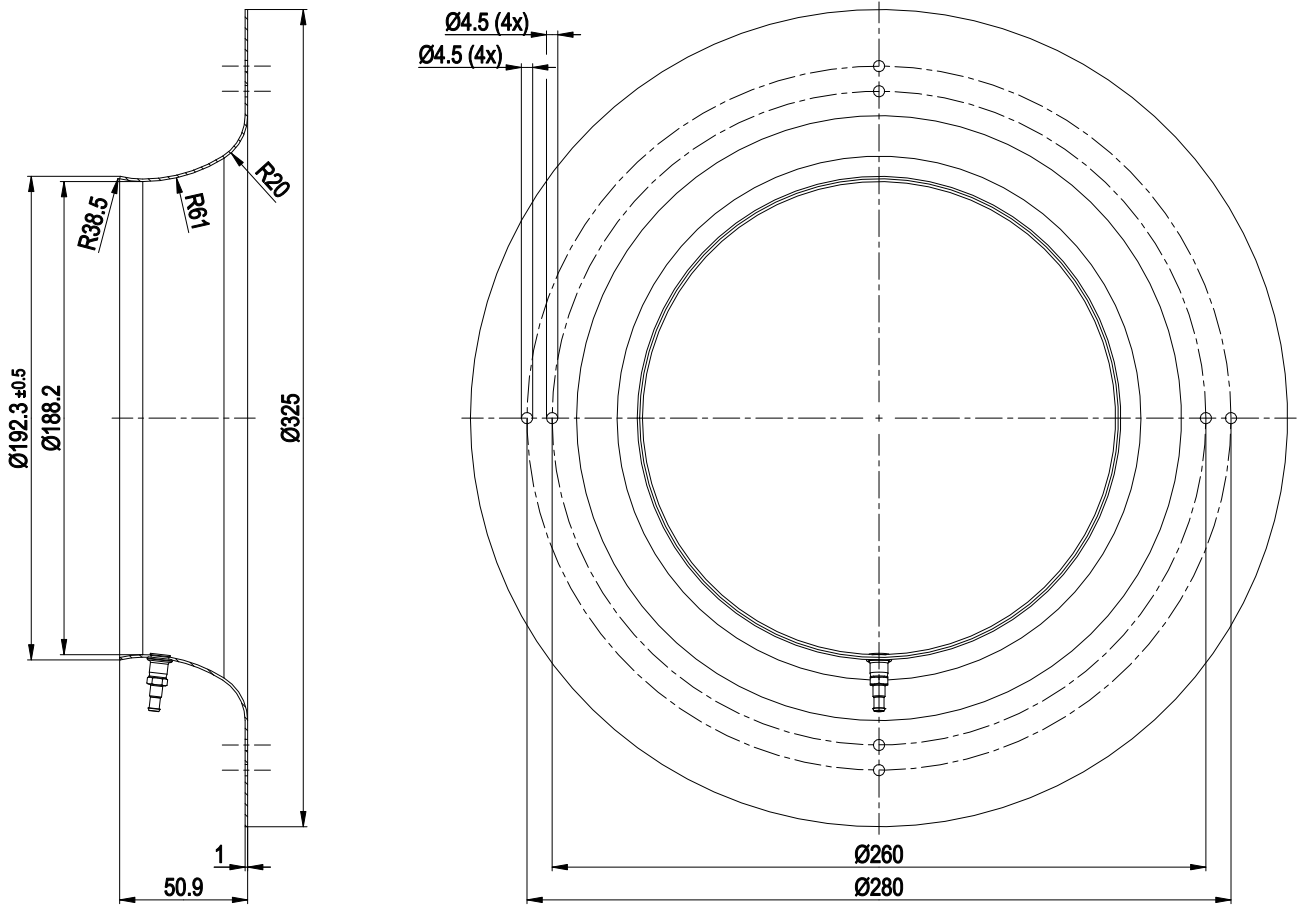


Inlet nozzle 28075-2-4013 with pressure tap (k-factor: 93)

EC centrifugal fan - RadiPac

backward curved, single inlet
for railway applications


Connection screen

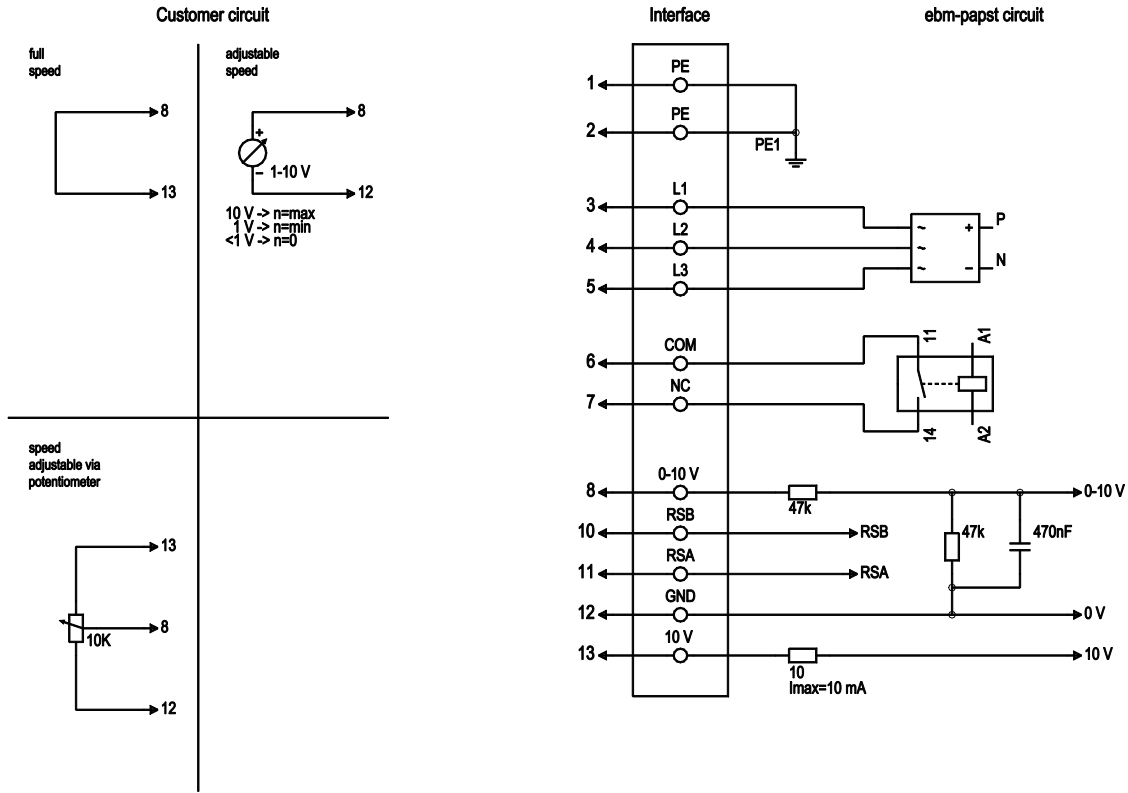

No.	Conn.	Designation	Colour	Function / assignment
1	1	PE	green/yellow	Protective earth
1	2	PE	-	not brought out via lead
1	3	L1	black	Power supply, phase, 50/60 Hz
1	4	L2	blue	Power supply, phase, 50/60 Hz
1	5	L3	brown	Power supply, phase, 50/60 Hz
2	6	COM	grey	Status relay, floating status contact, common connection, contact rating, 250 VAC / max. 2 A (AC1), min. 1 mA / 5 VDC, reinforced insulation with respect to control interface, basic insulation on mains side according to EN 50124-1
2	7	NC	orange	Status relay, floating status contact, break for failure, contact rating 250 VAC / max. 2 A (AC1), min. 1 mA / 5 VDC, reinforced insulation on control interface side, basic insulation on supply side according to EN 50124-1
2	8	0-10V	yellow	Analogue input (set value) SELV, 0-10 V, Ri=100kΩ, parametrisable curve
2	10	RSB	brown	RS485 interface for MODBUS, RSB; SELV
2	11	RSA	white	RS485 interface for MODBUS, RSA; SELV
2	12	GND	blue	Signal ground for control interface, SELV
2	13	+10V	red	Fixed voltage output 10 VDC, +10 V +/-3 %, max. 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometer); SELV



Charts: Air flow 50 Hz

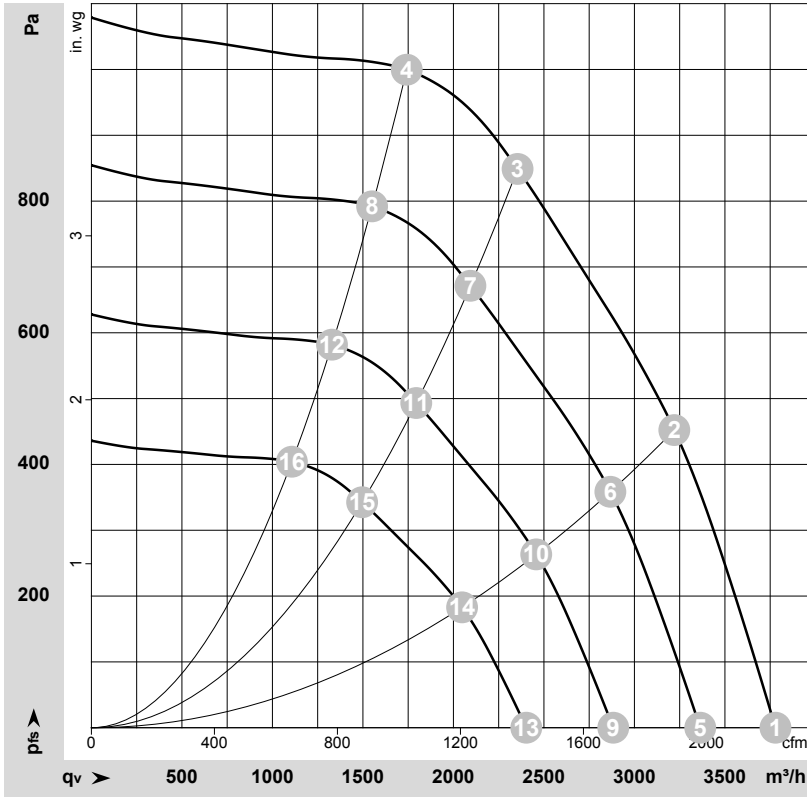

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-195494-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _{ed}	I	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	3140	697	1.09	3780	0	2225	0.00
2	3~	400	50	3140	885	1.37	3220	450	1895	1.81
3	3~	400	50	3140	940	1.50	2355	850	1385	3.41
4	3~	400	50	3140	889	1.37	1740	1000	1025	4.01
5	3~	400	50	2800	491	0.77	3365	0	1980	0.00
6	3~	400	50	2800	625	0.96	2865	360	1685	1.45
7	3~	400	50	2800	659	1.01	2095	672	1230	2.70
8	3~	400	50	2800	627	0.97	1550	794	915	3.19
9	3~	400	50	2400	309	0.48	2885	0	1695	0.00
10	3~	400	50	2400	393	0.61	2460	265	1445	1.06
11	3~	400	50	2400	415	0.64	1795	494	1055	1.98
12	3~	400	50	2400	395	0.61	1330	583	780	2.34
13	3~	400	50	2000	179	0.28	2405	0	1415	0.00
14	3~	400	50	2000	228	0.35	2050	184	1205	0.74
15	3~	400	50	2000	240	0.37	1495	343	880	1.38
16	3~	400	50	2000	229	0.35	1110	405	650	1.63

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

