

R3G280-RR04-I7 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	R3G280-RR04-I7	
Motor	M3G084-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	2900
Power consumption	W	660
Current draw	A	2.9
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	66.6	49.6	09 Power consumption $P_{ed}$	kW	0.65
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	2100
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	682
04 Efficiency grade N		79	62	10 Speed (rpm) n	min <sup>-1</sup>	2905
05 Variable speed drive		Yes		11 Specific ratio <sup>*</sup>		1.01

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

<sup>\*</sup> Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 


LU-151716



## Technical description

Weight	4.62 kg
Size	280 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted black
Impeller material	PP plastic
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up between -40°C and -25°C is permissible. For continuous operation at temperatures below -25°C (e.g. refrigeration applications) we recommend our fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- PFC, active</li> <li>- Soft start</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; EN 60335-1; CE
Approval	UL 1004-7 + 60730-1; EAC; CSA C22.2 No. 77 + CAN/CSA-E60730-1


Product drawing

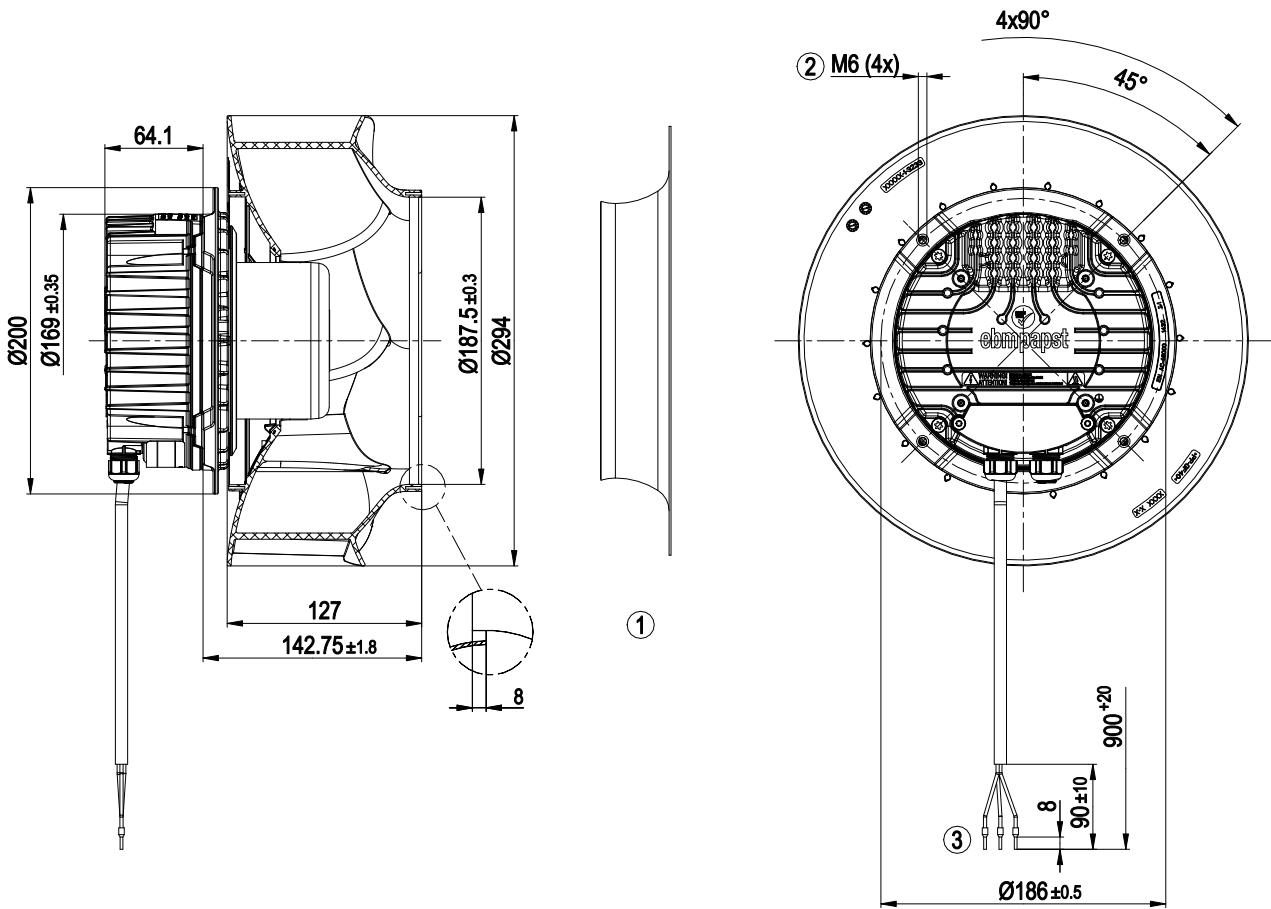

- 1 Accessory part: inlet ring 28000-2-4013 not included in scope of delivery
- 2 Max. clearance for screw 16 mm
- 3 Cable silicone 3G 1.0 mm<sup>2</sup>, 3x crimped ferrules




## Accessory part

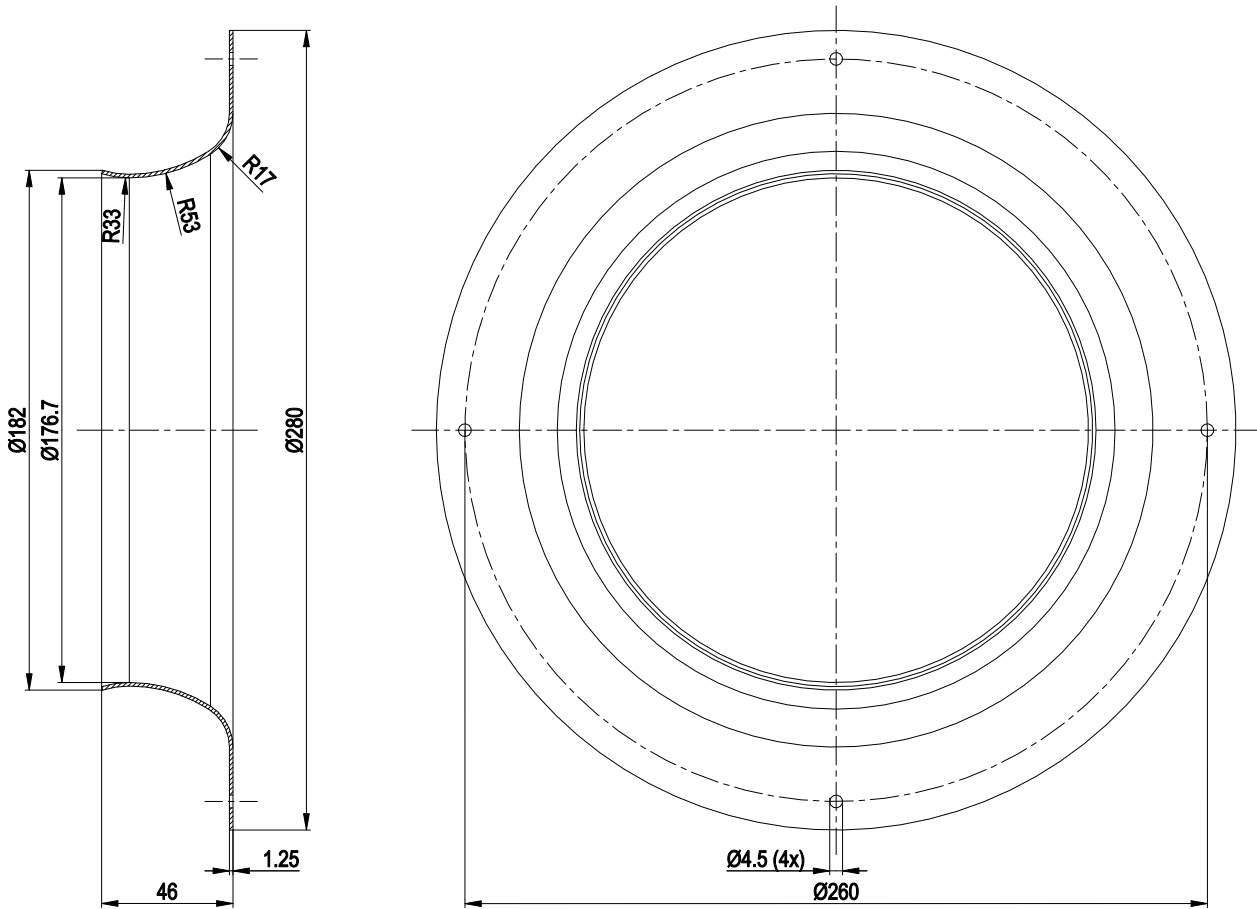

Accessory part: inlet ring 28000-2-4013 not included in scope of delivery




## Connection diagram

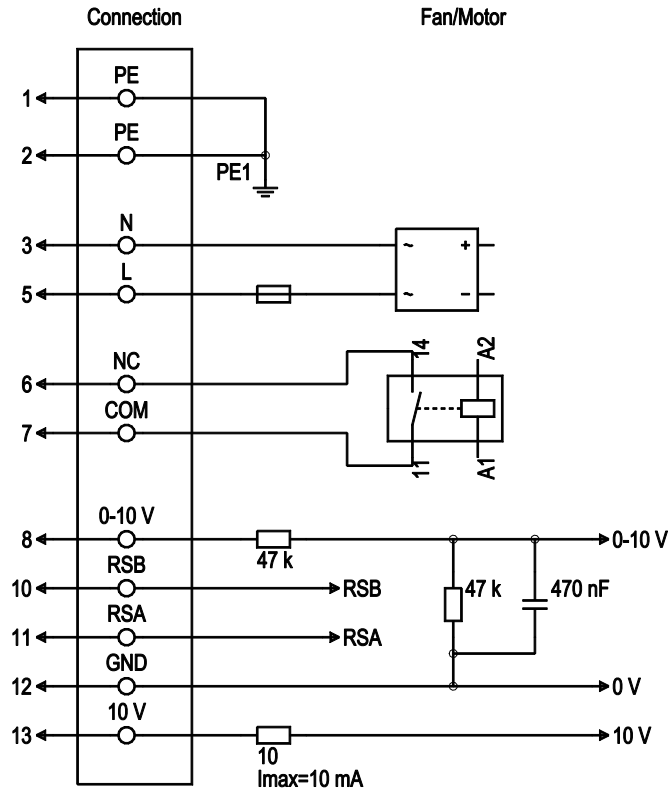

No.	Conn.	Designation	Color	Function/assignment
1	1	PE	green/yellow	Protective earth
1	2	PE	-	not brought out via wire
1	3	N	blue	Power supply, neutral conductor, 50/60 Hz
1	5	L	brown	Power supply, phase, 50/60 Hz
1	6	NC	-	not brought out via wire
1	7	COM	-	not brought out via wire
2	8	0-10V	-	not brought out via wire
2	10	RSB	-	not brought out via wire
2	11	RSA	-	not brought out via wire
2	12	GND	-	not brought out via wire
2	13	+10V	-	not brought out via wire



## Curves: Air performance 50 Hz

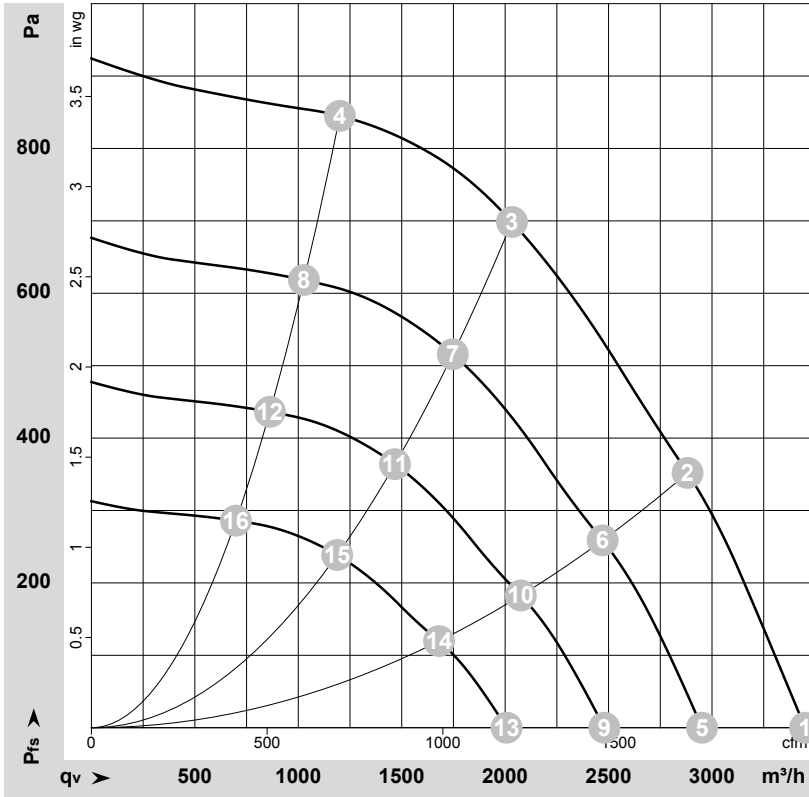

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-151716-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	230	50	2900	487	2.18	79	86	3450	0	2030	0.00
2	230	50	2900	604	2.67	73	81	2880	350	1695	1.41
3	230	50	2900	660	2.90	68	76	2035	700	1195	2.81
4	230	50	2900	571	2.53	74	81	1200	850	705	3.41
5	230	50	2500	305	1.37	75	82	2950	0	1735	0.00
6	230	50	2500	381	1.69	69	77	2470	259	1455	1.04
7	230	50	2500	417	1.84	64	72	1745	517	1030	2.08
8	230	50	2500	357	1.58	70	77	1025	619	605	2.49
9	230	50	2100	181	0.81	70	78	2480	0	1460	0.00
10	230	50	2100	226	1.00	65	73	2075	183	1220	0.73
11	230	50	2100	247	1.09	60	67	1470	365	865	1.47
12	230	50	2100	212	0.94	65	73	865	437	510	1.75
13	230	50	1700	96	0.43	65	72	2005	0	1180	0.00
14	230	50	1700	120	0.53	60	67	1680	120	990	0.48
15	230	50	1700	131	0.58	54	62	1190	239	700	0.96
16	230	50	1700	112	0.50	60	67	700	286	410	1.15

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

