

R3G280-RR10-P2

Carrier-LG Korea

EC centrifugal fan - RadiCal

backward-curved, single-intake

for rail applications



R3G280-RR10-P2 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|-----------|
| Type | R3G280-RR10-P2 | |
| Motor | M3G084-DF | |
| Nominal voltage | VDC | 110 |
| Nominal voltage range | VDC | 77 .. 138 |
| Method of obtaining data | | ml |
| Status | | prelim. |
| Speed (rpm) | min ⁻¹ | 2600 |
| Power consumption | W | 475 |
| Current draw | A | 4.3 |
| Min. ambient temperature | °C | -40 |
| Max. ambient temperature | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R3G280-RR10-P2

Carrier-LG Korea

EC centrifugal fan - RadiCal

backward-curved, single-intake

for rail applications

Technical description

| | |
|---|--|
| Weight | 4.2 kg |
| Size | 280 mm |
| Motor size | 84 |
| Rotor surface | Painted black |
| Electronics housing material | Die-cast aluminum |
| Impeller material | PA66 plastic, sheet-metal plate painted black |
| Number of blades | 6 |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP55 |
| Insulation class | "F" |
| Moisture (F) / Environmental (H) protection class | H3 |
| Max. permitted ambient temp. for motor (transport/storage) | +80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C |
| Installation position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes | On rotor side |
| Mode | S1 |
| Motor mounting | Ball bearing |
| Motor bearing | (sealed) |
| Technical features | <ul style="list-style-type: none">- Output 10 VDC, max. 10 mA- Operation and alarm display- Alarm relay- Motor current limitation- RS-485 MODBUS-RTU- Soft start- EEPROM write cycles: 100,000 maximum- Control input 0-10 VDC / PWM- Control interface with SELV potential safely disconnected from the mains- Overvoltage detection- Thermal overload protection for electronics/motor- Line undervoltage detection |
| EMC regulations | According to EN 50121-3-2 |
| Electrical hookup | Plug |
| Motor protection | Thermal overload protector (TOP) internally connected |
| With cable | Lateral |
| Protection class | I (with customer connection of protective earth) |
| Conformity with standards | EN 15085-1, CPC3: 2007; EN 45545-2, HL3: 2013; EN 50155: 2008; EN 61373, Cat. 1B: 2010 |
| Comment | If voltage (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation, meaning they then have only basic insulation The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay. |



R3G280-RR10-P2


Carrier-LG Korea

EC centrifugal fan - RadiCal

backward-curved, single-intake

for rail applications

Product drawing

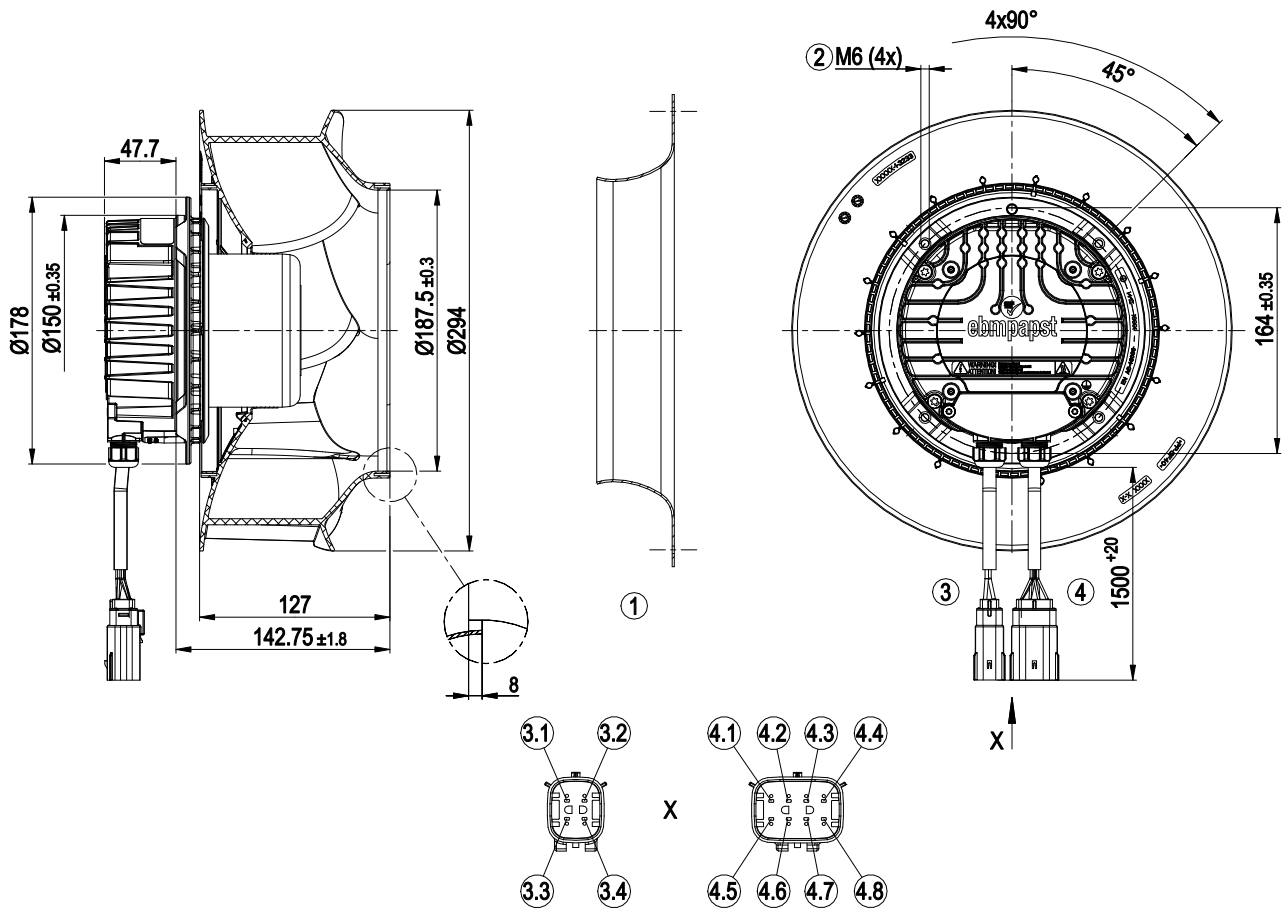


| | |
|-----|--|
| 1 | Accessory part: inlet ring 28000-2-4013 not included in scope of delivery |
| 2 | Max. clearance for screw 16 mm |
| 3 | Cable halogen-free, BETAtrans® 3 GKW flex, 4G 1.5 mm ² 1x 4-pole connector housing Molex MX150L 19419-0004 3x flat plug Molex MX150L 0194170047 |
| 3.1 | PE |
| 3.2 | 0 V |
| 3.3 | +10 V |
| 3.4 | Not used / no function |
| 4 | Cable halogen-free, BETAtrans® 3 GKW flex, 7x 0.5 mm ² 1x 8-pole connector housing Molex MX150L 19419-0002 7x flat plug Molex MX150L 0194170048 |
| 4.1 | COM |
| 4.2 | NC |
| 4.3 | PWM |
| 4.4 | RSB |
| 4.5 | RSA |
| 4.6 | 0 V |
| 4.7 | +110 V |
| 4.8 | Not used / no function |



EC centrifugal fan - RadiCal

backward-curved, single-intake
for rail applications


Connection diagram

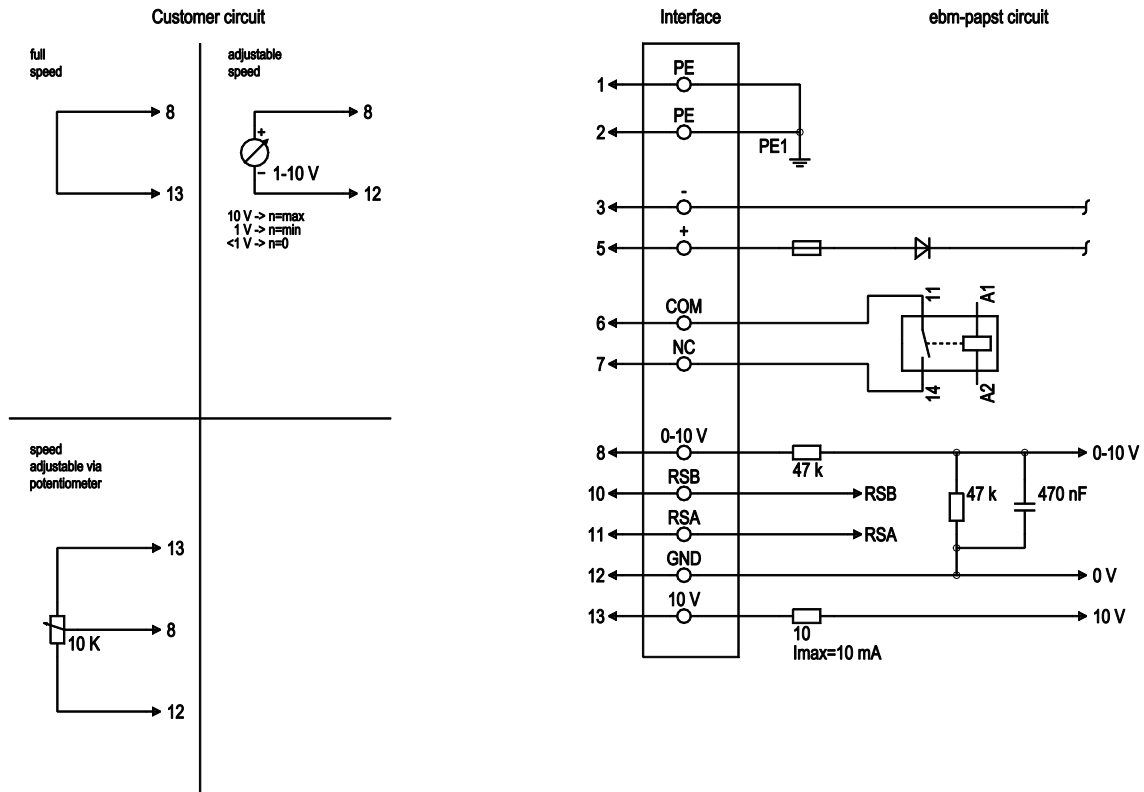

| No. | Conn. | Designation | Function/assignment |
|-----|-------|-------------|--|
| | 1, 2 | PE | Protective earth |
| | 3 | - | Power supply, GND, voltage range see nameplate |
| | 5 | + | Power supply, voltage range see nameplate |
| | 6 | COM | Status relay, floating status contact, break for failure, contact rating 250 VAC / max. 2 A (AC1) / min. 1 mA / 5 V, basic insulation on supply side and on control interface side |
| | 7 | NC | Status relay, floating status contact, common connection, contact rating 250 VAC / max. 2 A (AC1) / min. 1 mA / 5 V, basic insulation on supply side and on control interface side |
| | 8 | 0-10 V | Analog input 1, set value: 0-10 V, $R_i = 100\text{ k}\Omega$, adjustable curve; SELV |
| | 10 | RSB | RS485 interface for MODBUS, RSB; SELV |
| | 11 | RSA | RS485 interface for MODBUS, RSA; SELV |
| | 12 | GND | Reference ground for control interface; SELV |
| | 13 | +10 V | Fixed voltage output 10 VDC, +10 V $\pm 3\%$, max. 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometers); SELV |



Curves: Air performance

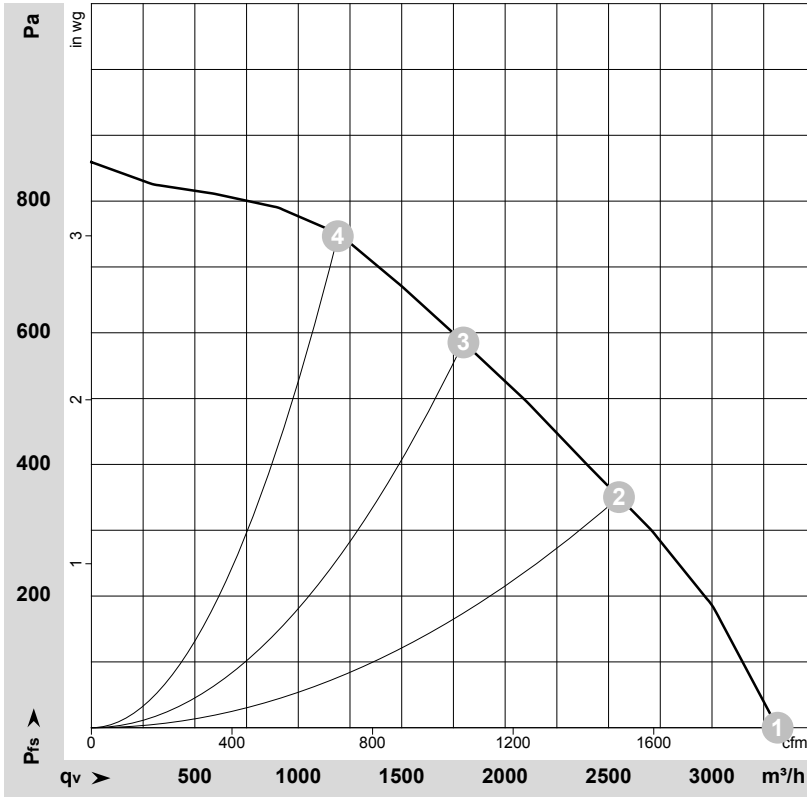

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-177987-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | U | n | P _{ed} | I | LpA _{in} | LwA _{in} | q _v | p _{fs} | q _v | p _{fs} |
|---|-----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
| | V | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | in. wg |
| 1 | 110 | 2810 | 436 | 3.96 | 77 | 84 | 3315 | 0 | 1950 | 0.00 |
| 2 | 110 | 2715 | 496 | 4.50 | 70 | 77 | 2550 | 350 | 1500 | 1.41 |
| 3 | 110 | 2635 | 495 | 4.50 | 66 | 73 | 1800 | 586 | 1060 | 2.35 |
| 4 | 110 | 2760 | 491 | 4.46 | 69 | 75 | 1190 | 751 | 700 | 3.01 |

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · q_v = Air flow
 p_{fs} = Pressure increase

