

R3G310-AY63-13 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-----------------------|------------|
| Type | R3G310-AY63-13 | |
| Motor | M3G112-EA | |
| Phase | | 3~ |
| Nominal voltage | VAC | 200 |
| Nominal voltage range | VAC | 200 .. 240 |
| Frequency | Hz | 50/60 |
| Type of data definition | | ml |
| State | | prelim. |
| Speed | min ⁻¹ | 3360 |
| Power input | W | 1730 |
| Current draw | A | 5.3 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

| | |
|--|--|
| Mass | 12.5 kg |
| Size | 310 mm |
| Surface of rotor | Coated in black |
| Material of electronics housing | Die-cast aluminium |
| Material of impeller | Aluminium sheet |
| Number of blades | 7 |
| Direction of rotation | Clockwise, seen on rotor |
| Type of protection | IP 54 |
| Insulation class | "B" |
| Humidity class | F4-1 |
| Max. permissible ambient motor temp. (transp./ storage) | +80 °C |
| Min. permissible ambient motor temp. (transp./storage) | -40 °C |
| Mounting position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensate discharge holes | Rotor-side |
| Operation mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Operation and alarm display - Input for sensor 0-10 V or 4-20 mA - External 24 V input (programming) - External release input - Alarm relay - Integrated PID controller - Motor current limit - PFC, active - RS485 MODBUS RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA |
| Electrical leads | Via terminal box |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Protection class | I (if protective earth is connected by customer) |
| Product conforming to standard | EN 61800-5-1; CE |
| Approval | GOST; UL 1004-7 + 60730 |

EC centrifugal fan - Plug fan

backward curved, single inlet


Product drawing

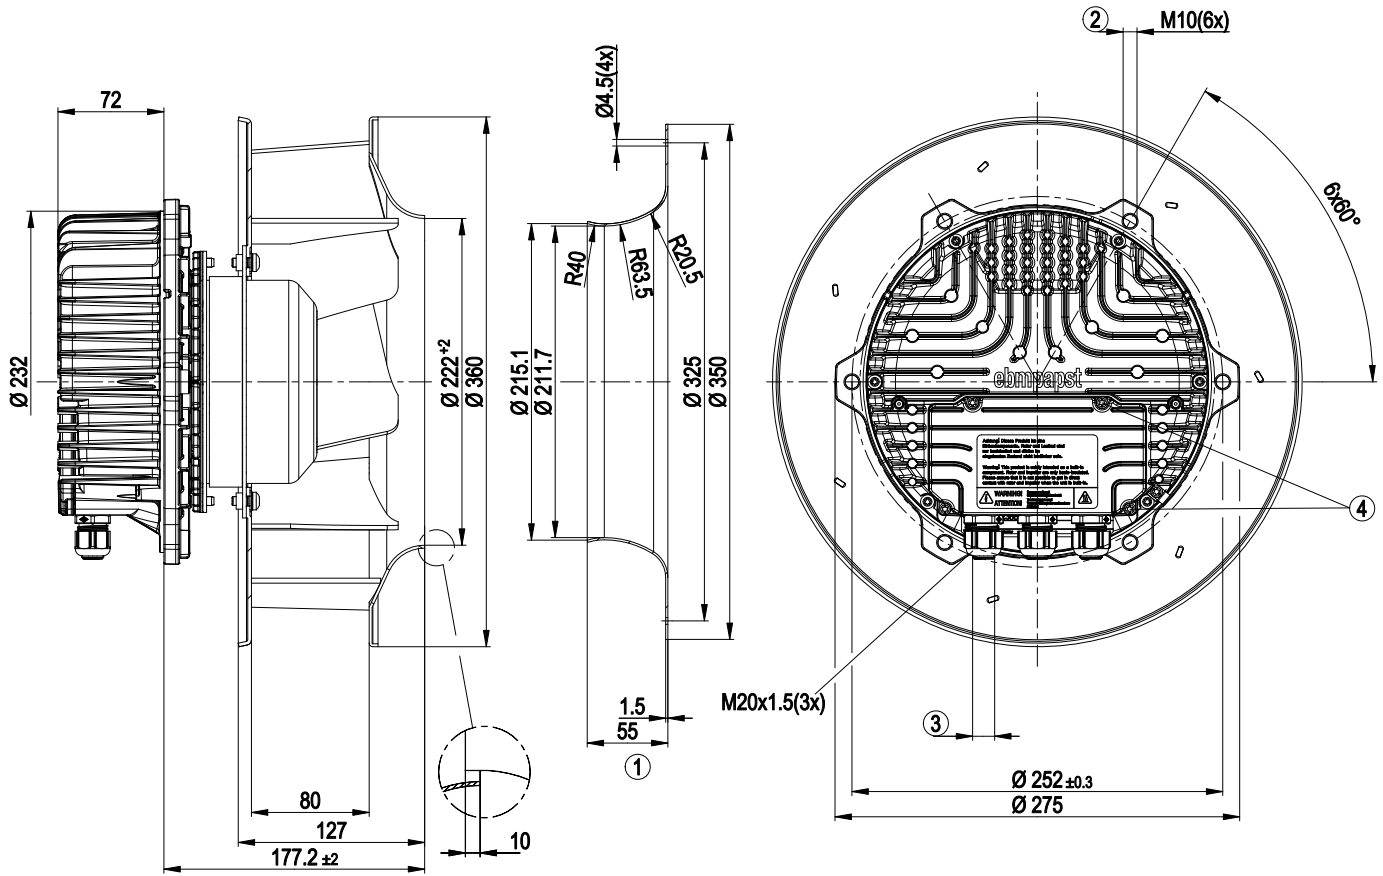

| | |
|---|---|
| 1 | Accessory part: Inlet nozzle 31570-2-4013, not included in the standard scope of delivery |
| 2 | Depth of screw max. 20 mm |
| 3 | Cable diameter: min. 4 mm, max. 10 mm, tightening torque: 4±0.6 Nm |
| 4 | Tightening torque 3.5±0.5 Nm |



Connection screen

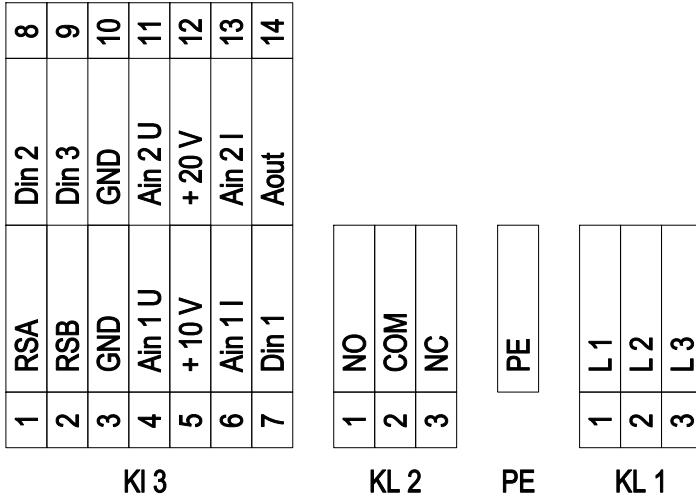

| No. | Conn. | Designation | Function / assignment |
|------|--------|-------------|--|
| KL 1 | 1 | L1 | Mains supply connection, supply voltage 3~200-240 VAC; 50/60 Hz |
| KL 1 | 2 | L2 | Mains supply connection, supply voltage 3~200-240 VAC; 50/60 Hz |
| KL 1 | 3 | L3 | Mains supply connection, supply voltage 3~200-240 VAC; 50/60 Hz |
| PE | | PE | Earth connection, PE connection |
| KL 2 | 1 | NO | Status relay, floating status contact; normally open; close with error |
| KL2 | 2 | COM | Status relay; floating status contact; changeover contact; common connection; contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA |
| KL2 | 3 | NC | Status relay, floating status contact; break with error |
| KL 3 | 1 | RSA | Bus connection RS-485, RSB, MODBUS RTU; SELV |
| KL 3 | 2 | RSB | Bus connection RS-485, RSA, MODBUS RTU; SELV |
| KL 3 | 3 / 10 | GND | Signal ground for control interface; SELV |
| KL 3 | 4 | Ain1 U | Analogue input 1, set value: 0-10 V, Ri = 100 kΩ, parametrisable curve, only usable as alternative to input Ain1; SELV |
| KL 3 | 5 | + 10 V | Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometer), SELV |
| KL 3 | 6 | Ain1 I | Analogue input 1, set value: 4-20 mA; Ri = 100 Ω, parametrisable curve, only usable as alternative to input Ain1 U; SELV |
| KL 3 | 7 | Din1 | Digital input 1: enabling of electronics, enabling: open pin or applied voltage 5-50 VDC disabling: bridge to GND or applied voltage <1 VDC reset function: triggers software reset after a level change to <1 VDC; SELV |
| KL 3 | 8 | Din2 | Digital input 2: parameter set switch 1/2, according to EEPROM setting, the valid/used parameter set can be selected via bus or via digital input DIN2. Parameter set 1: open pin or applied voltage 5-50 VDC Parameter set 2: bridge to GND or applied voltage <1 VDC; SELV |
| KL 3 | 9 | Din3 | Digital input 3: controller function of integrated controller, according to EEPROM setting, the controller function of the integrated controller is normally/inversely selectable per bus or per digital input normal: open pin or applied voltage 5-50 VDC inverse: bridge to GND or applied voltage <1 VDC; SELV |
| KL 3 | 11 | Ain2 U | Analogue input 2, actual value: 0-10 V, Ri = 100 kΩ, parametrisable curve, only usable as alternative to input Ain2; SELV |
| KL 3 | 12 | + 20 V | Fixed voltage output 20 VDC, +20 V ±25/-10%, max. 50 mA, short-circuit-proof, power supply for external devices (e.g. sensors); SELV |


EC centrifugal fan - Plug fan

backward curved, single inlet

| No. | Conn. | Designation | Function / assignment |
|------|-------|-------------|--|
| KL 3 | 13 | Ain2 I | Analogue input 2, actual value: 4-20 mA, $R_i = 100 \Omega$, parametrisable curve, only usable as alternative to input Ain2 U; SELV |
| KL 3 | 14 | Aout | Analogue output 0-10 VDC, max. 5 mA, output of the current motor level control coefficient / motor speed parametrisable curve; SELV |



Charts: Air flow 50 Hz

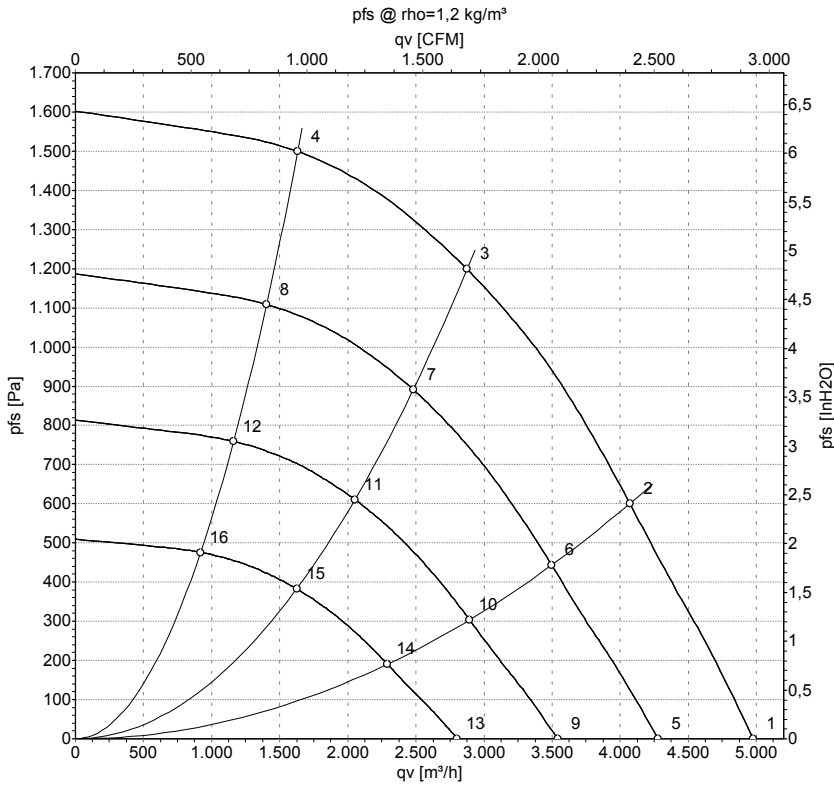

Measurement: LU-143828

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _{ed} | I | LpA _{in} | LwA _{in} | LwA _{out} | qv | p _{fs} |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | dB(A) | m ³ /h | Pa |
| 1 | 200 | 50 | 3360 | 1164 | 3.63 | 86 | 93 | 99 | 4975 | 0 |
| 2 | 200 | 50 | 3360 | 1485 | 4.57 | 78 | 86 | 92 | 4070 | 600 |
| 3 | 200 | 50 | 3360 | 1730 | 5.30 | 77 | 84 | 90 | 2875 | 1200 |
| 4 | 200 | 50 | 3360 | 1608 | 4.96 | 83 | 91 | 95 | 1630 | 1500 |
| 5 | 200 | 50 | 2900 | 739 | 2.31 | 82 | 89 | 96 | 4275 | 0 |
| 6 | 200 | 50 | 2900 | 941 | 2.90 | 74 | 82 | 88 | 3495 | 444 |
| 7 | 200 | 50 | 2900 | 1103 | 3.41 | 73 | 81 | 86 | 2480 | 892 |
| 8 | 200 | 50 | 2900 | 1022 | 3.15 | 79 | 87 | 92 | 1405 | 1113 |
| 9 | 200 | 50 | 2400 | 419 | 1.31 | 78 | 84 | 91 | 3540 | 0 |
| 10 | 200 | 50 | 2400 | 534 | 1.64 | 69 | 77 | 84 | 2895 | 304 |
| 11 | 200 | 50 | 2400 | 625 | 1.93 | 68 | 76 | 81 | 2055 | 611 |
| 12 | 200 | 50 | 2400 | 579 | 1.79 | 75 | 82 | 87 | 1160 | 763 |
| 13 | 200 | 50 | 1900 | 208 | 0.65 | 72 | 78 | 85 | 2800 | 0 |
| 14 | 200 | 50 | 1900 | 265 | 0.82 | 63 | 71 | 78 | 2290 | 190 |
| 15 | 200 | 50 | 1900 | 310 | 0.96 | 62 | 70 | 76 | 1625 | 383 |
| 16 | 200 | 50 | 1900 | 287 | 0.89 | 69 | 76 | 81 | 920 | 478 |

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side
 qv = Air flow · p_{fs} = Pressure increase

