

**R3G310-BF02-N3**

Faiveley Transport Leipzig GmbH & C

# EC centrifugal fan

backward-curved, single-intake

for rail applications

R3G310-BF02-N3 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G310-BF02-N3    |            |
| Motor                    | M3G084-GF         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 480        |
| Nominal voltage range    | VAC               | 400 .. 510 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 3000       |
| Power consumption        | W                 | 1100       |
| Current draw             | A                 | 1.47       |
| Min. ambient temperature | °C                | -40        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



R3G310-BF02-N3

Faiveley Transport Leipzig GmbH & C

# EC centrifugal fan

backward-curved, single-intake  
for rail applications

## Technical description

|  |  |
|--|--|
| Weight   | 8.2 kg   |
| Fan size   | 310 mm   |
| Rotor surface  | Painted black  |
| Impeller material  | Sheet aluminum   |
| Housing material   | Die-cast aluminum  |
| Number of blades   | 7  |
| Direction of rotation  | Clockwise, viewed toward rotor   |
| Degree of protection   | IP55   |
| Insulation class   | "F"  |
| Moisture (F) / Environmental (H) protection class                          | H3   |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C   |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C   |
| Installation position  | Rotor on top   |
| Condensation drainage holes  | None   |
| Mode   | S1   |
| Motor bearing  | Ball bearing   |
| Technical features   | <ul style="list-style-type: none"><li>- Output 10 VDC, max. 10 mA</li><li>- Alarm relay</li><li>- Integrated PID controller</li><li>- Run monitoring</li><li>- Power limiter</li><li>- Motor current limitation</li><li>- Emergency operation</li><li>- PFC, passive</li><li>- RS-485 MODBUS-RTU</li><li>- Soft start</li><li>- EEPROM write cycles: 100,000 maximum</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Overvoltage detection</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage / phase failure detection</li></ul> |
| EMC regulations  | According to EN 50121-3-2  |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA  |
| Motor protection   | Thermal overload protector (TOP) internally connected  |
| With cable   | Lateral  |
| Protection class   | I (with customer connection of protective earth)   |
| Conformity with standards  | EN 15085-1, CPC3: 2007; EN 45545-2, HL3: 2013; EN 50155: 2008; EN 61373, Cat. 1B: 2010   |



R3G310-BF02-N3

Faiveley Transport Leipzig GmbH & C

# EC centrifugal fan

backward-curved, single-intake

for rail applications

## Comment

Prerequisite for operation is a Class 1 vehicle electrical system architecture according to EN 50533. If voltage (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation, meaning they then have only basic insulation.

The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay.




R3G310-BF02-N3

Faiveley Transport Leipzig GmbH & C

# EC centrifugal fan

backward-curved, single-intake  
for rail applications

## Product drawing

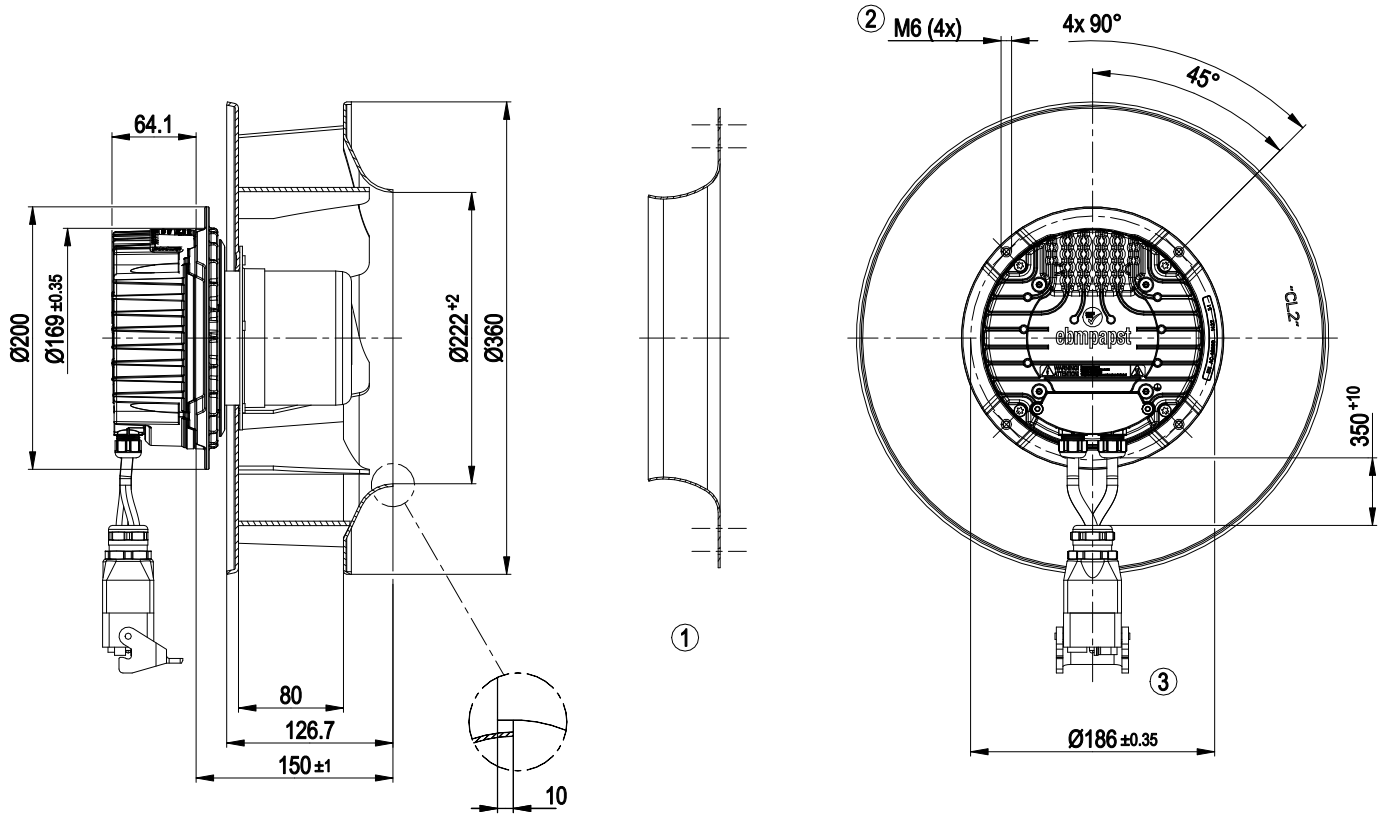

|   |   |
|---|---|
| 1 | Accessory part: inlet ring 31570-2-4013 not included in scope of delivery   |
| 2 | Max. clearance for screw 16 mm  |
| 3 | Connector housing Harting HAN Modular TWIN 09 14 002 0301 with Han E Protected Modul 9140063041 and Han DD Modul 9140123001 |



R3G310-BF02-N3


Faiveley Transport Leipzig GmbH & C

# EC centrifugal fan

backward-curved, single-intake

for rail applications

## Accessory part

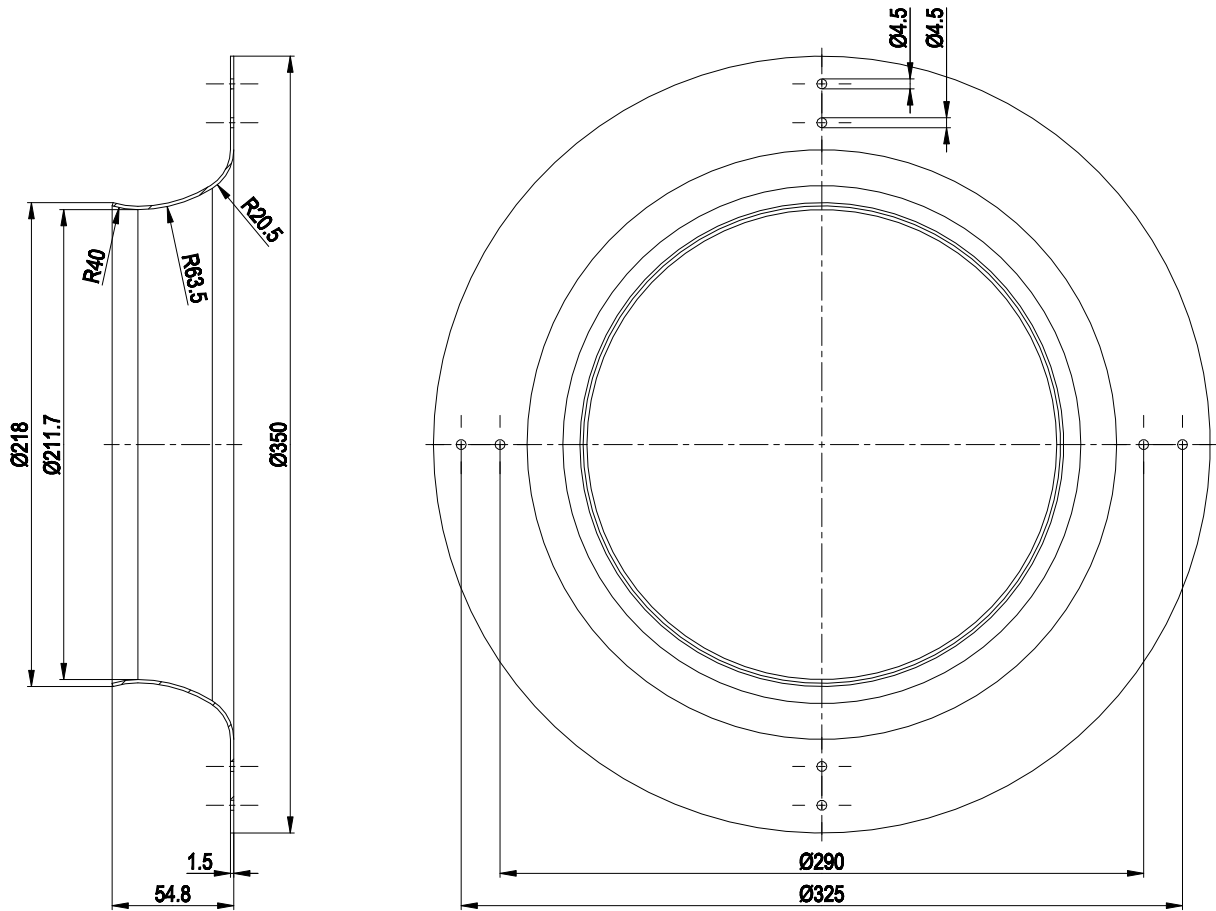


Accessory part: inlet ring 31570-2-4013 not included in scope of delivery



# EC centrifugal fan


backward-curved, single-intake  
for rail applications

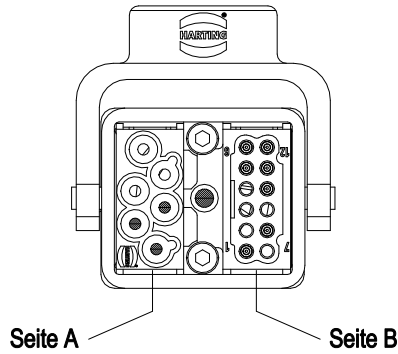

| Motorseite                                     |                  |            |   |                  |                         |
|--|------------------|------------|---|------------------|-------------------------|
| Versorgung (Seite A)                           |                  |            | Signale (Seite B)                             |                  |                         |
| BETAtrans 3 GKW flex sw 4G 1,5 mm <sup>2</sup> |                  |            | BETAtrans 3 GKW C-flex 7x 0,5 mm <sup>2</sup> |                  |                         |
| Pin-Nr.  | Ader-Nr. / Farbe | Funktion   | Pin-Nr.                                       | Ader-Nr. / Farbe | Funktion                |
| 1  | 1 / sw           | 3~480 V L1 | 1   | 1 / gr           | Fehlermelderelais (COM) |
| 2  | 2 / bl           | 3~480 V L2 | 2   |                  | Reserve                 |
| 3  | 3 / br           | 3~480 V L3 | 3   |                  | Reserve                 |
| 4  |                  | Reserve    | 4   |                  | Reserve                 |
| 5  |                  | Reserve    | 5   | 2 / ws           | RSA (MODBUS)            |
| 6  |                  | Reserve    | 6   | 3 / br           | RSB (MODBUS)            |
| Gehäuse  | 4 / gn/ge        | PE         | 7   |                  | Reserve                 |
|  |                  |            | 8   | 4 / or           | Fehlermelderelais (NC)  |
|  |                  |            | 9   |                  | Reserve                 |
|  |                  |            | 10  | 5 / bl           | GND (SELV)              |
|  |                  |            | 11  | 6 / ge           | PWM/LIN                 |
|  |                  |            | 12  | 7 / rt           | P+10 V / 10 mA (SELV)   |



## Connection diagram

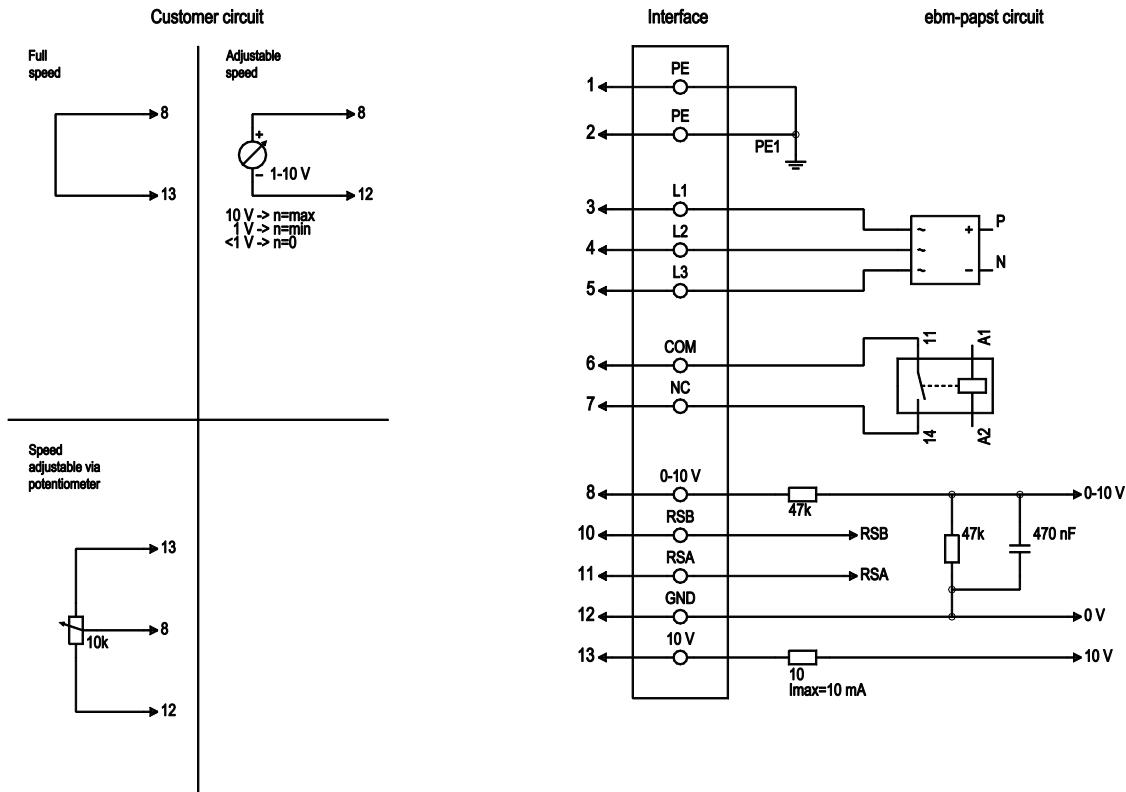

| No. | Conn. | Designation | Color        | Function/assignment   |
|-----|-------|-------------|--------------|---|
| 1   | 1, 2  | PE          | green/yellow | Protective earth  |
| 1   | 3     | L1          | black        | Power supply, phase, 50/60 Hz   |
| 1   | 4     | L2          | blue         | Power supply, phase, 50/60 Hz   |
| 1   | 5     | L3          | brown        | Power supply, phase, 50/60 Hz   |
| 2   | 6     | COM         | gray         | Status relay, floating status contact, common connection, contact rating 250 VAC / 30 VDC 5 A minimum contact separation 1 mA / 5 VDC, reinforced insulation on supply side, basic insulation on control interface side |
| 2   | 7     | NC          | orange       | Status relay, floating status contact, break for failure, contact rating 250 VAC / 30 VDC 5 A minimum contact separation 1 mA / 5 VDC, reinforced insulation on supply side, basic insulation on control interface side |
| 2   | 8     | 0-10V       | yellow       | Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve  |
| 2   | 10    | RSB         | brown        | RS485 interface for MODBUS, RSB; SELV   |
| 2   | 11    | RSA         | white        | RS485 interface for MODBUS, RSA; SELV   |
| 2   | 12    | GND         | blue         | Reference ground for control interface, SELV  |
| 2   | 13    | +10V        | red          | Fixed voltage output 10 VDC, +10 V ± 3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); SELV  |




# R3G310-BF02-N3

Faiveley Transport Leipzig GmbH & C

# EC centrifugal fan

backward-curved, single-intake  
for rail applications

## Curves: Air performance 50 Hz

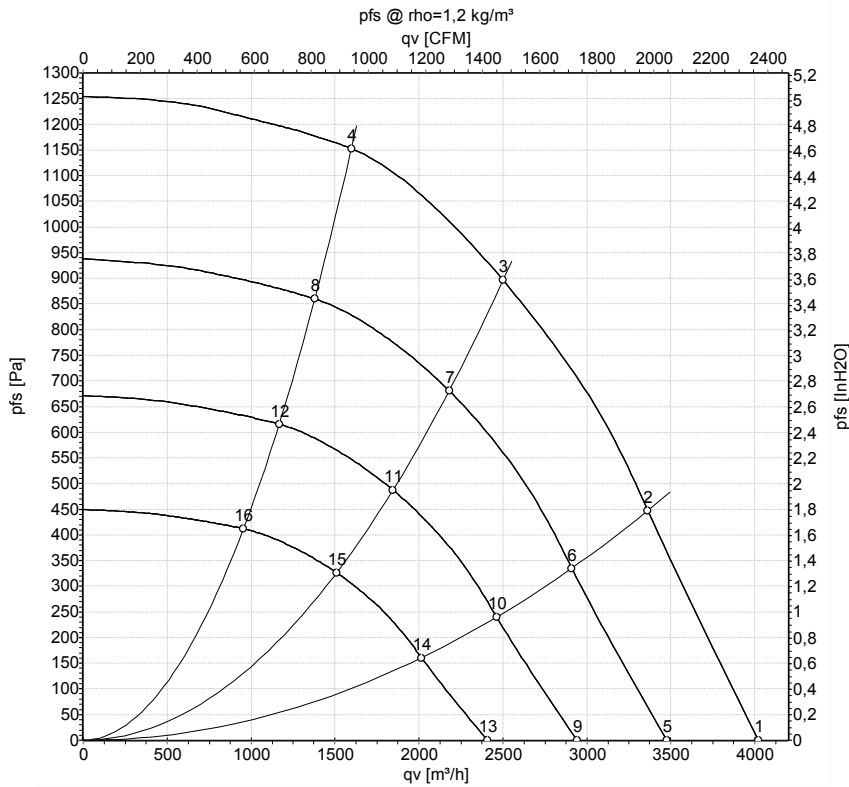

Measurement: LU-165170-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | inH2O           |
| 1  | 480 | 50 | 3000              | 852             | 1.13 | 82                | 91                | 96                 | 4025              | 0               | 2370           | 0.00            |
| 2  | 480 | 50 | 3000              | 1016            | 1.32 | 77                | 85                | 91                 | 3365              | 450             | 1980           | 1.81            |
| 3  | 480 | 50 | 3000              | 1100            | 1.47 | 73                | 81                | 87                 | 2500              | 900             | 1475           | 3.61            |
| 4  | 480 | 50 | 3000              | 1078            | 1.40 | 77                | 86                | 90                 | 1600              | 1150            | 940            | 4.62            |
| 5  | 480 | 50 | 2600              | 550             | 0.73 | 79                | 87                | 92                 | 3480              | 0               | 2045           | 0.00            |
| 6  | 480 | 50 | 2600              | 658             | 0.86 | 73                | 82                | 87                 | 2910              | 334             | 1715           | 1.34            |
| 7  | 480 | 50 | 2600              | 751             | 0.97 | 69                | 78                | 83                 | 2180              | 681             | 1285           | 2.73            |
| 8  | 480 | 50 | 2600              | 695             | 0.90 | 73                | 82                | 86                 | 1380              | 860             | 810            | 3.45            |
| 9  | 480 | 50 | 2200              | 333             | 0.44 | 74                | 83                | 88                 | 2945              | 0               | 1730           | 0.00            |
| 10 | 480 | 50 | 2200              | 399             | 0.52 | 69                | 78                | 83                 | 2465              | 239             | 1450           | 0.96            |
| 11 | 480 | 50 | 2200              | 455             | 0.59 | 65                | 74                | 79                 | 1845              | 488             | 1085           | 1.96            |
| 12 | 480 | 50 | 2200              | 421             | 0.55 | 69                | 78                | 82                 | 1170              | 616             | 685            | 2.47            |
| 13 | 480 | 50 | 1800              | 183             | 0.24 | 69                | 78                | 83                 | 2410              | 0               | 1415           | 0.00            |
| 14 | 480 | 50 | 1800              | 218             | 0.28 | 64                | 72                | 78                 | 2015              | 160             | 1185           | 0.64            |
| 15 | 480 | 50 | 1800              | 249             | 0.32 | 60                | 69                | 74                 | 1510              | 327             | 890            | 1.31            |
| 16 | 480 | 50 | 1800              | 230             | 0.30 | 64                | 73                | 77                 | 955               | 412             | 560            | 1.65            |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

