

R3G310-RU28-86

# EC centrifugal fan - RadiCal

backward-curved, single-intake

for rail applications



R3G310-RU28-86 ebmpapst Datasheet FansCo

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

## Nominal data

Type	R3G310-RU28-86	
Motor	M3G084-CF	
Nominal voltage	VDC	24
Nominal voltage range	VDC	16 .. 32
Method of obtaining data		fa
Status		prelim.
Speed (rpm)	min <sup>-1</sup>	2150
Power consumption	W	300
Current draw	A	12.5
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change




### Technical description

<b>Weight</b>	3.5 kg
<b>Size</b>	310 mm
<b>Motor size</b>	84
<b>Rotor surface</b>	Painted black
<b>Electronics housing material</b>	Die-cast aluminum, painted black
<b>Impeller material</b>	PA plastic
<b>Number of blades</b>	6
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	Motor IP24 KM, electronics IP6K9K (mating connector installed)
<b>Insulation class</b>	"B"
<b>Moisture (F) / Environmental (H) protection class</b>	H3
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Any
<b>Condensation drainage holes</b>	None
<b>Cooling hole/opening</b>	On rotor side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Lowering input</li> <li>- Error output (high-side switch)</li> <li>- INVLIN (inverse linear control input)</li> <li>- Power limiter</li> <li>- Load dump (58 V)</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Temperature derating</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics</li> <li>- Line undervoltage detection</li> <li>- Reverse polarity protection</li> </ul>
<b>EMC regulations</b>	According to EN 50121-3-2
<b>Electrical hookup</b>	Connector with cable
<b>With cable</b>	Lateral
<b>Protection class</b>	III
<b>Conformity with standards</b>	EN 15085-1, CPC3: 2013; EN 45545-2, HL3: 2013 + A1:2015; EN 50155: 2008

# EC centrifugal fan - RadiCal

backward-curved, single-intake  
for rail applications

## Product drawing

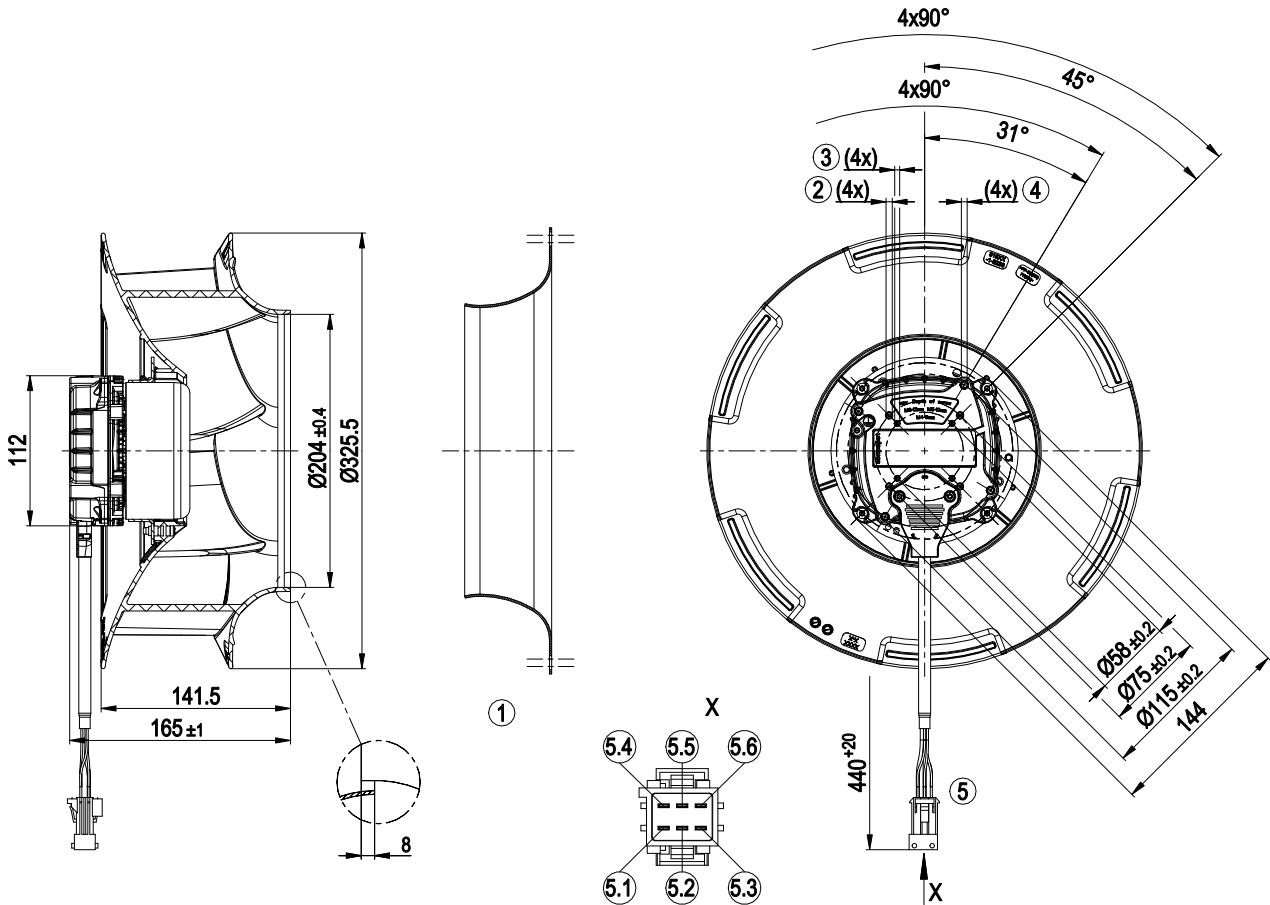


1	Accessory part: inlet ring 31000-2-4013 not included in scope of delivery
2	Tapping hole prepared for self-tapping M5 screw, max. clearance for screw 10 mm
3	Tapping hole prepared for self-tapping M4 screw, max. clearance for screw 8 mm
4	Tapping hole prepared for self-tapping M6 screw, max. clearance for screw 12 mm
5	Cable BETAtrans® 2x GWK R 2.5 mm², 4x GWK R 1.0 mm² 6-pole connector housing TE 1-962349-1, 2x flat plug TE 2-962916-1, 4x flat plug TE 1-962915-1 1x seal TE 963205-1, 2x seal TE 828905-1, 4x seal TE 828904-1
5.1	+ UB
5.2	GND
5.3	PWM/LIN
5.4	INVLIN
5.5	ABSENK
5.6	Diagnostic output
	Accessory part: Cable (460 mm) with mating connector, part no. 02002-4-1021 not included in scope of delivery 6-pole mating connector TE 1-963212-1, 4x receptacle TE 929939-1, 2x receptacle TE 929937-1



# EC centrifugal fan - RadiCal

backward-curved, single-intake  
for rail applications

## Accessory part

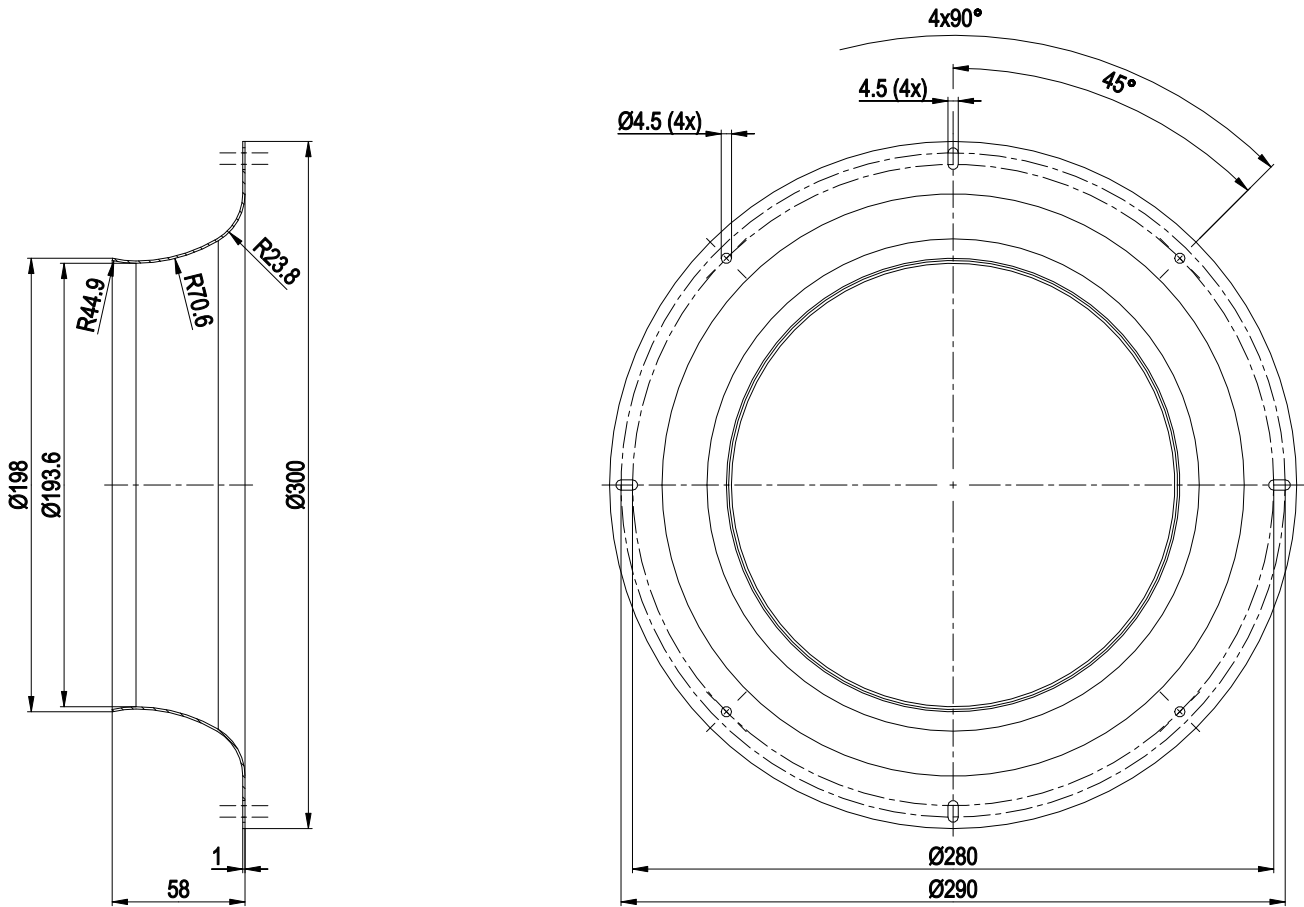

Inlet ring 31000-2-4013




# EC centrifugal fan - RadiCal

backward-curved, single-intake

for rail applications


## Connection diagram

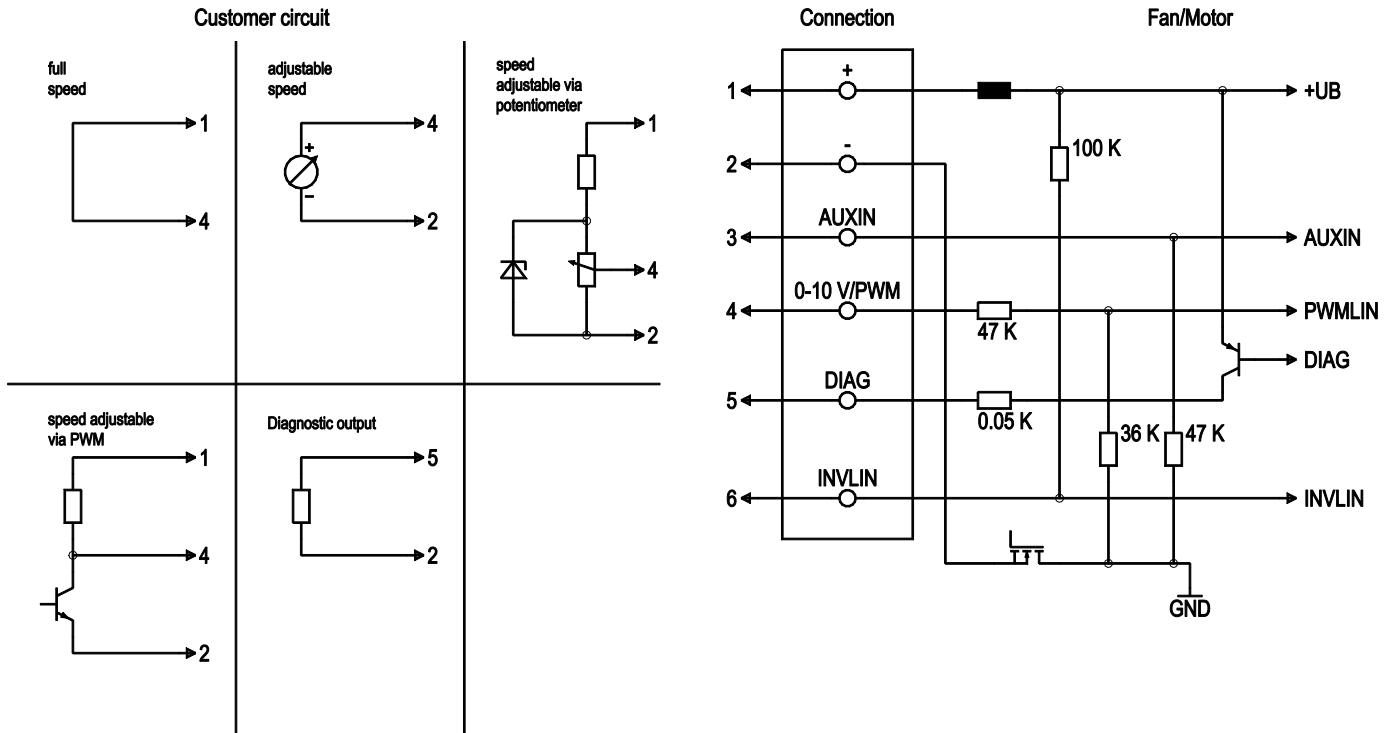

No.	Conn.	Designation	Function/assignment
	1	+	Power supply, see nameplate for voltage range
	2	-	Power supply, see nameplate for voltage range
	3	AUXIN	Digital input: when active (> 4 V), value of PWM signal is halved
	4	0-10 V / PWM	Control input: $R_i > 47\text{ k}\Omega$ 0-10 V (typ. < 1 V -> n=0; 1.5 V -> n=min; > 10 V -> n=max) PWM (amplitude 10 V; 1-50 kHz; typ. < 5 % -> n=0; 15% -> n=min; > 100% -> n=max)
	5	DIAG	Diagnostic output: Open collector, $I_{source\ max} = 20\text{ mA}$ , Fan OK -> low; fan error -> high
	6	INVLIN	Control input, inverse linear



## Curves: Air performance

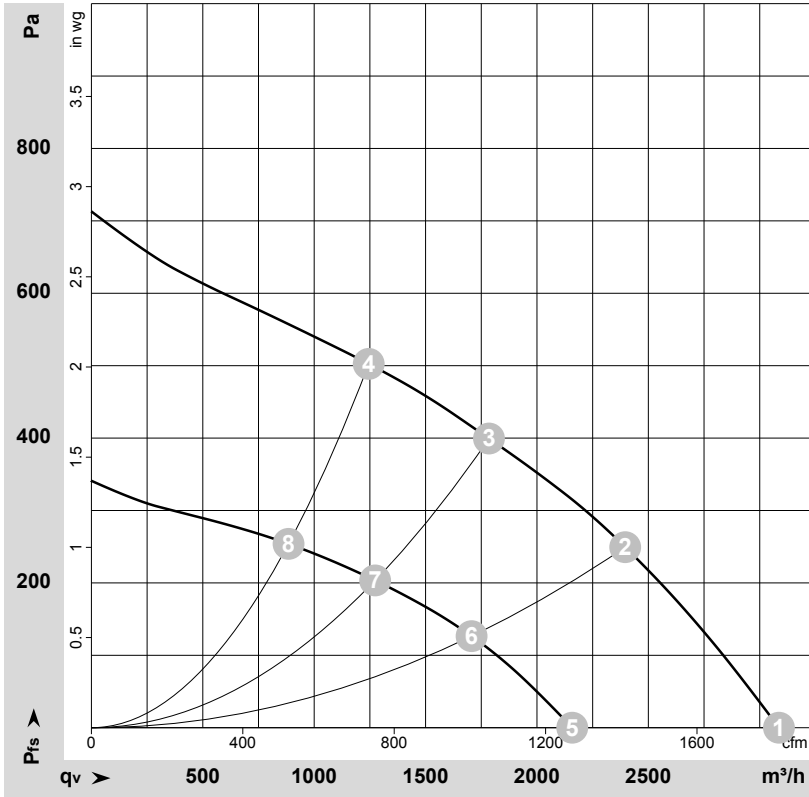

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-178381-1  
Measurement: LU-178399-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	n	P <sub>ed</sub>	I	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
	V	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	in. wg
1	24	2150	300	12.50	3085	0	1815	0.00
2	24	2065	352	14.65	2395	250	1410	1.00
3	24	2035	364	15.10	1785	400	1050	1.61
4	24	2070	359	14.92	1245	500	735	2.01
5	16	1520	106	6.63	2160	0	1270	0.00
6	16	1485	128	8.00	1705	126	1005	0.51
7	16	1465	134	8.38	1275	203	750	0.81
8	16	1480	129	8.07	885	254	520	1.02

U = Voltage · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

