

R3G355-AD22-71 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142



Nominal data

Type	R3G355-AD22-71	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1660
Power consumption	W	415
Current draw	A	2.7
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	58.3	47.4	09 Power consumption P_{ed}	kW	0.41
02 Measurement category		A		09 Air flow q_v	m ³ /h	2225
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	350
04 Efficiency grade N		72.9	62	10 Speed (rpm) n	min ⁻¹	1660
05 Variable speed drive		Yes		11 Specific ratio [*]		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

^{*} Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-69768



Technical description

Fan size	355 mm
Rotor surface	Painted black
Impeller material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 1.1 mA - Alarm relay - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	UL 2111; CSA C22.2 No. 77

Product drawing

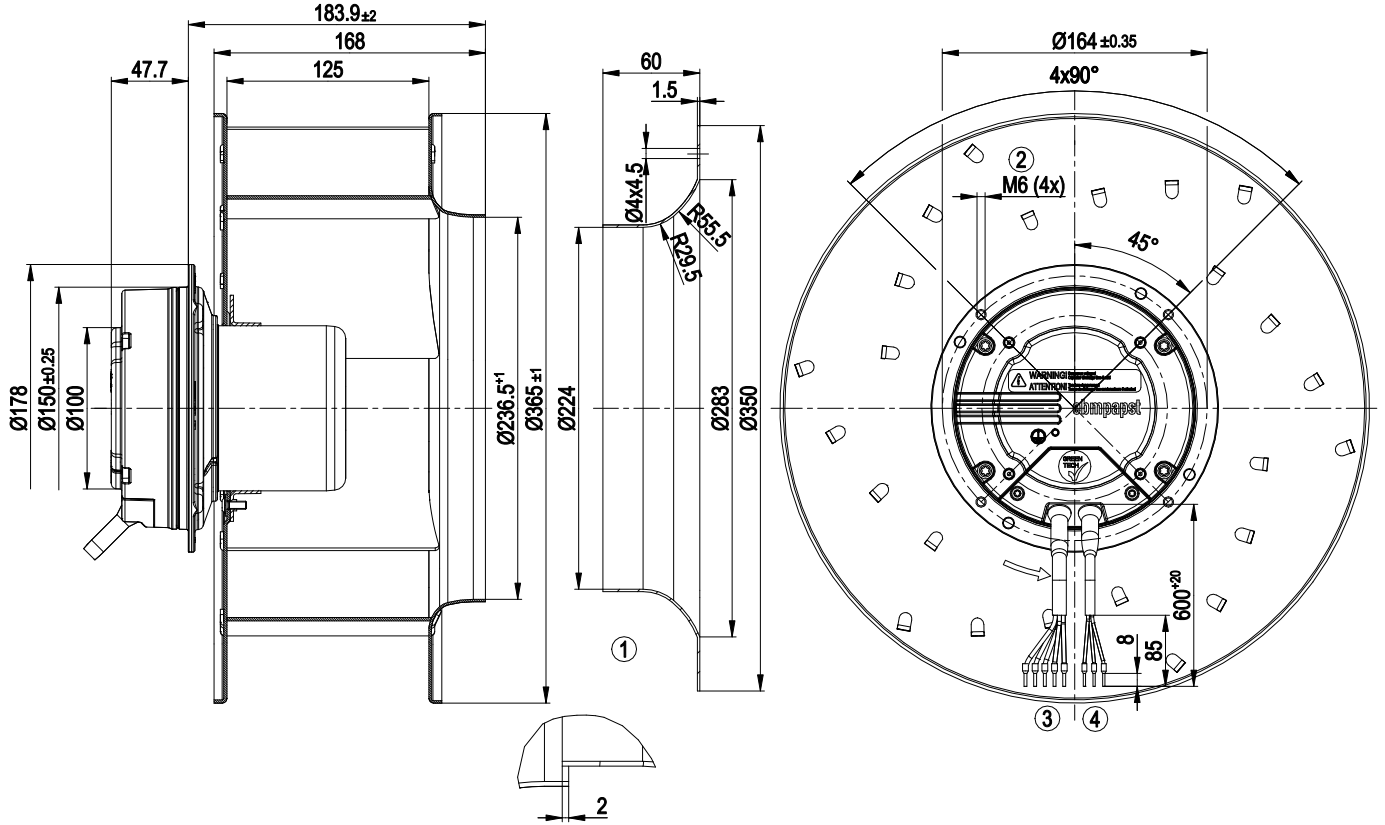

1	Accessory part: Inlet ring 35560-2-4013 not included in scope of delivery, other inlet rings on request
2	Clearance for screw 8 - 10 mm
3	Cable PVC AWG18, 5 x crimped ferrules
4	Cable PVC AWG 22, 3 x crimped ferrules




EC centrifugal fan

backward-curved, single-intake

Connection diagram


Customer circuit

Application notes for various control options

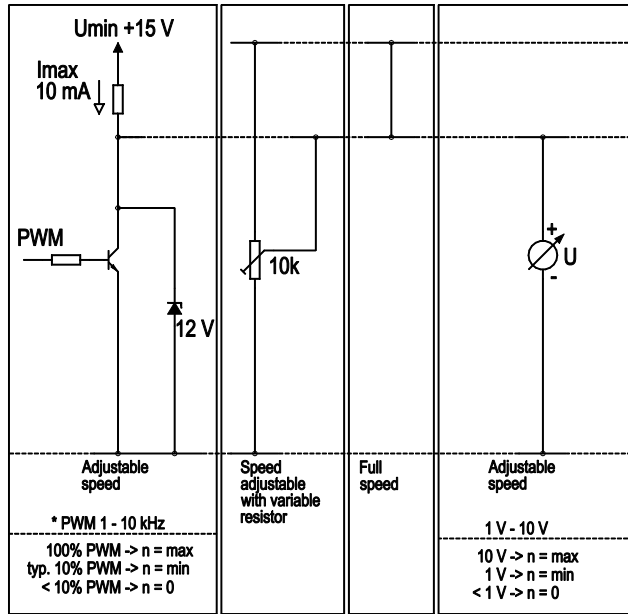


Connection

Fan / Motor

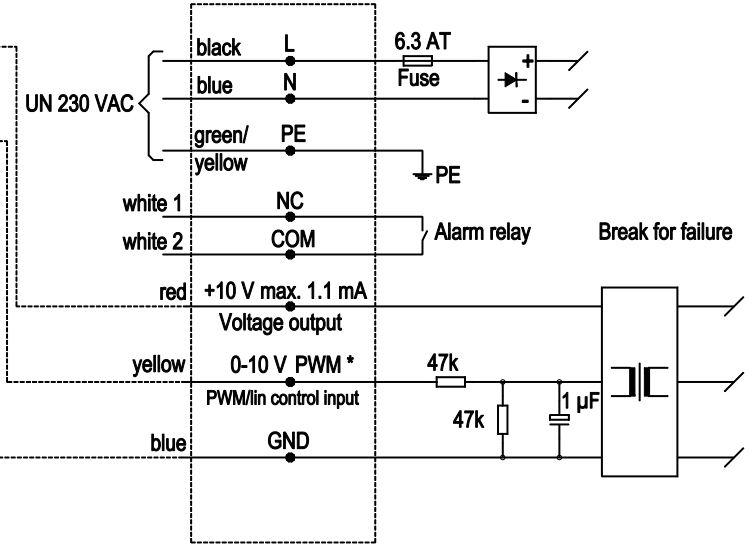

Curves: Air performance 50 Hz

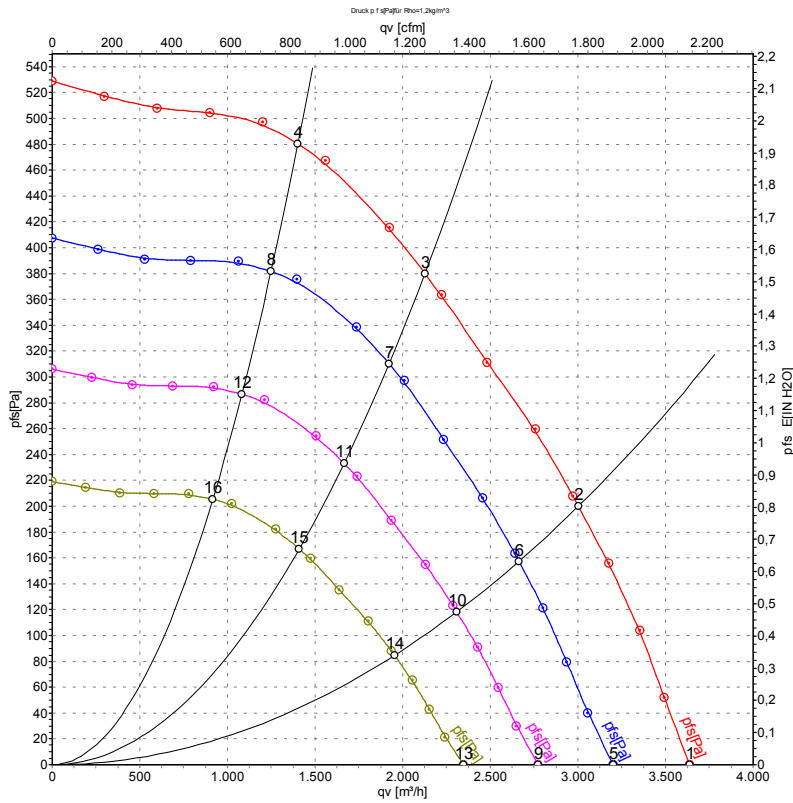

Measurement: LU-69768-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH2O
1	230	50	1705	316	2.02	3640	0	2140	0.00
2	230	50	1690	381	2.43	3000	200	1765	0.80
3	230	50	1660	415	2.70	2125	380	1250	1.53
4	230	50	1685	396	2.57	1400	480	825	1.93
5	230	50	1500	215	1.38	3200	0	1885	0.00
6	230	50	1500	266	1.70	2665	158	1565	0.63
7	230	50	1500	305	1.96	1920	310	1130	1.24
8	230	50	1500	280	1.82	1250	382	735	1.53
9	230	50	1300	140	0.89	2775	0	1635	0.00
10	230	50	1300	173	1.11	2310	118	1360	0.47
11	230	50	1300	199	1.28	1665	233	980	0.94
12	230	50	1300	183	1.19	1080	287	635	1.15
13	230	50	1100	85	0.54	2345	0	1380	0.00
14	230	50	1100	105	0.67	1955	85	1150	0.34
15	230	50	1100	120	0.77	1410	167	830	0.67
16	230	50	1100	111	0.72	915	205	540	0.82

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

