

R3G355-AI56-08

Stulz GmbH Klimatechnik

EC centrifugal fan

backward curved, single inlet

with guard grille

R3G355-AI56-08 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142



Nominal data

| | | |
|--------------------------|-------------------|------------|
| Type | R3G355-AI56-08 | |
| Motor | M3G112-EA | |
| Phase | | 3~ |
| Nominal voltage | VAC | 400 |
| Nominal voltage range | VAC | 380 .. 480 |
| Frequency | Hz | 50/60 |
| Type of data definition | | ml |
| Speed | min ⁻¹ | 2200 |
| Power input | W | 950 |
| Current draw | A | 1.75 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

| | |
|-----------------------|--------|
| Installation category | A |
| Efficiency category | Static |
| Variable speed drive | Yes |
| Specific ratio* | 1.01 |

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

| | Actual | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------------|--------------|
| Overall efficiency η_{es} | 59.9 | 47 | 51 |
| Efficiency grade N | 70.9 | 58 | 62 |
| Power input P_{ed} | kW | 0.9 | |
| Air flow q_v | m ³ /h | 2805 | |
| Pressure increase p_{fs} | Pa | 642 | |
| Speed n | min ⁻¹ | 2220 | |

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



R3G355-AI56-08

Stulz GmbH Klimatechnik

EC centrifugal fan

backward curved, single inlet

with guard grille

Technical features

| | |
|--|--|
| Mass | 8.4 kg |
| Size | 355 mm |
| Surface of rotor | Coated in black |
| Material of electronics housing | Die-cast aluminium |
| Material of impeller | Aluminium sheet |
| Number of blades | 6 |
| Direction of rotation | Clockwise, seen on rotor |
| Type of protection | IP 54 |
| Insulation class | "B" |
| Humidity class | F4-1 |
| Max. permissible ambient motor temp. (transp./ storage) | +80 °C |
| Min. permissible ambient motor temp. (transp./storage) | -40 °C |
| Mounting position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensate discharge holes | Rotor-side |
| Operation mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none">- Output 10 VDC, max. 10 mA- Output 20 VDC, max. 50 mA- Output for slave 0-10 V- Input for sensor 0-10 V or 4-20 mA- External 24 V input (programming)- Alarm relay- Integrated PID controller- Cable break detection with control line- Motor current limit- PFC, passive- RS485 ebmBUS- Soft start- Control input 0-10 VDC / PWM- Control interface with SELV potential safely disconnected from the mains- Over-temperature protected electronics / motor- Line undervoltage / phase failure detection |
| EMC interference immunity | Acc. to EN 61000-6-2 (industrial environment) |
| EMC harmonics | Acc. to EN 61000-3-2/3 |
| EMC interference emission | Acc. to EN 61000-6-3 (household environment) |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA |
| Electrical leads | Via terminal box; With plug |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Protection class | I (if protective earth is connected by customer) |
| Product conforming to standard | CE |
| Approval | CCC |




R3G355-AI56-08

Stulz GmbH Klimatechnik

EC centrifugal fan

backward curved, single inlet
with guard grille

Product drawing

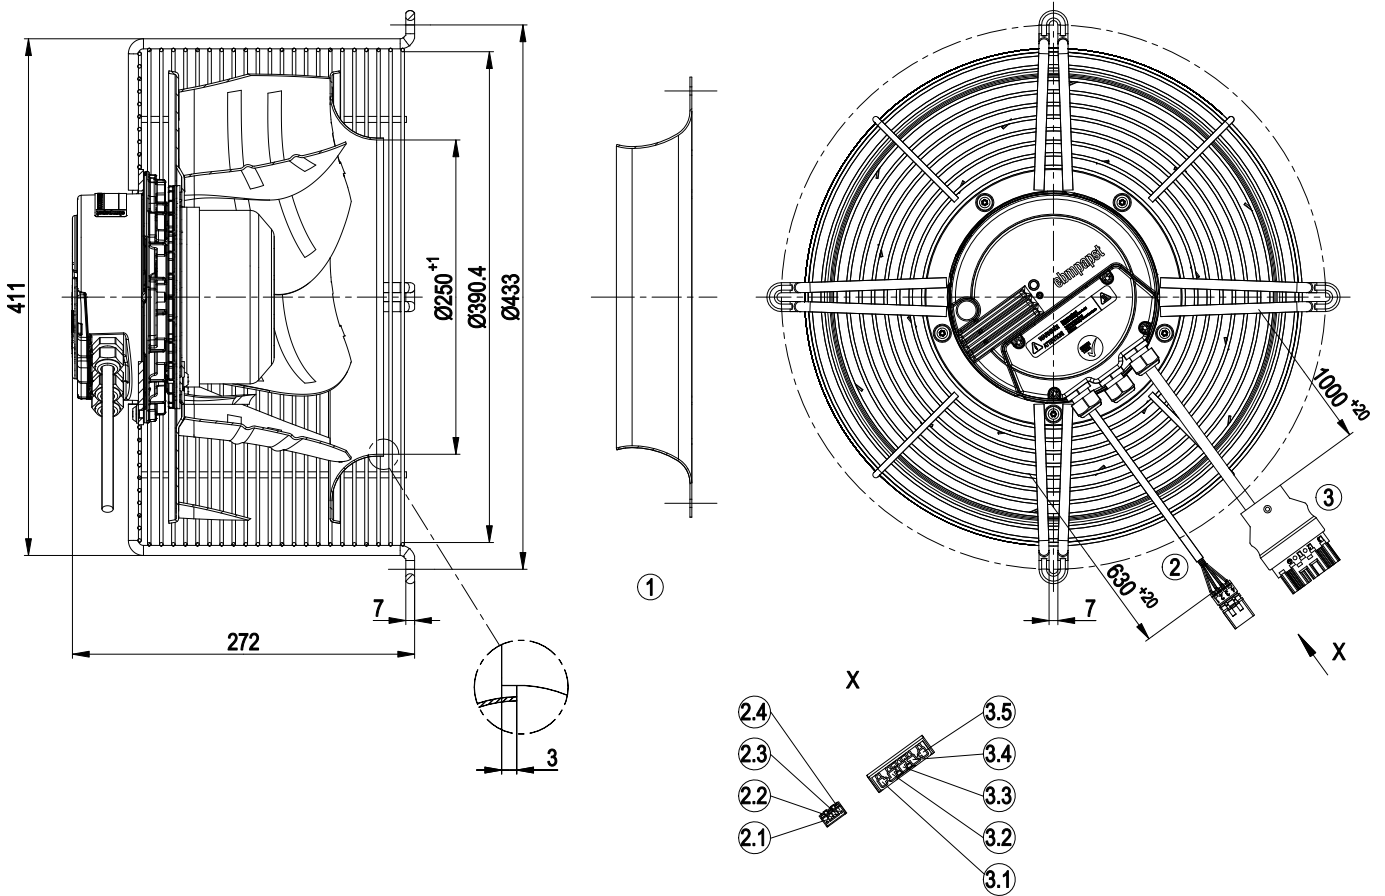

| | |
|-----|---|
| 1 | Accessory part: Inlet nozzle 35560-2-4013, not included in the standard scope of delivery |
| 2 | Control cable with 4-pole strip Wago 890-254 encoding B |
| 2.1 | GND |
| 2.2 | 0-10V/PWM |
| 2.3 | COM |
| 2.4 | NC |
| 3 | Motor cable with plug and strain relief Wago 0770-001/K011-0174/0000-0300 |
| 3.1 | Not assigned |
| 3.2 | PE |
| 3.3 | L1 |
| 3.4 | L2 |
| 3.5 | L3 |



R3G355-AI56-08


Stulz GmbH Klimatechnik

EC centrifugal fan

backward curved, single inlet

with guard grille

Accessory part

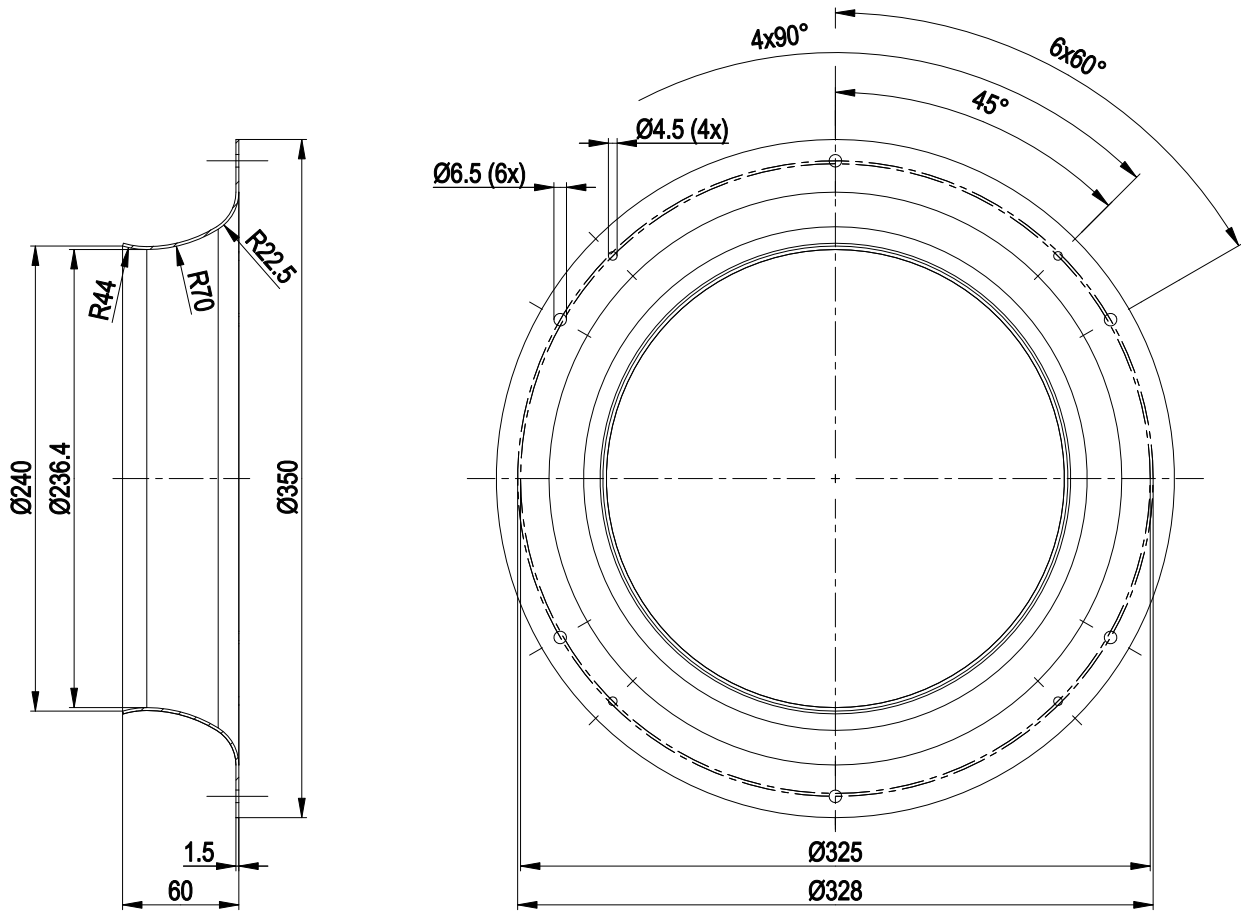


EC centrifugal fan

backward curved, single inlet

with guard grille


Connection screen

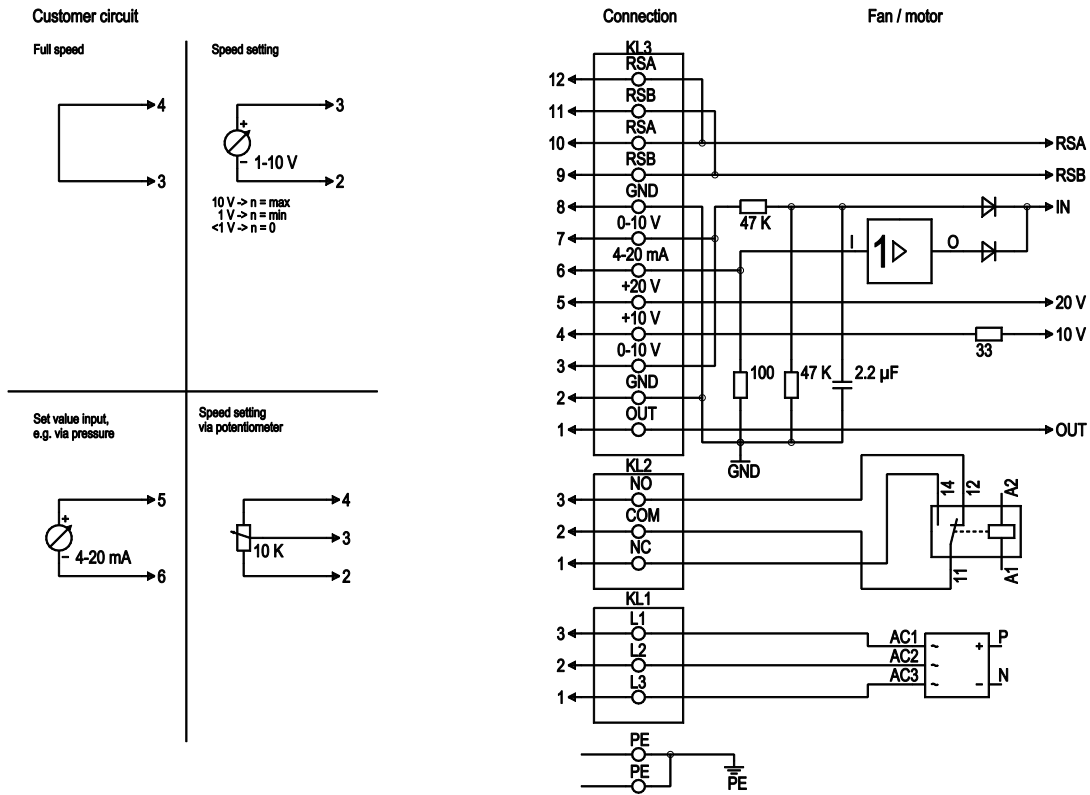

| No. | Pin | Signal | Function / assignment |
|-----|---------|------------|---|
| PE | | PE | Protective earth connection |
| KL1 | 1, 2, 3 | L1, L2, L3 | Supply voltage, 50/60 Hz |
| KL2 | 1 | NC | Floating status message contact, normally closed connection or n<60 rpm |
| KL2 | 2 | COM | Floating status message contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1) |
| KL2 | 3 | NO | Floating status message contact, normally open connection or n<60 rpm |
| KL3 | 1 | OUT | Analogue output, 0-10 VDC, max. 3 mA, SELV, Output of the current motor level control coefficient: 1 V corresponds to 10% level control coefficient, 10 V correspond to 100% level control coefficient. |
| KL3 | 2, 8 | GND | Reference mass for control interface, SELV |
| KL3 | 3, 7 | 0-10 V | Use control / actual value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV |
| KL3 | 4 | +10 V | Voltage output 10 VDC (+/-3%), max. 10 mA, supply voltage for external devices (e.g. potentiometer), SELV |
| KL3 | 5 | +20 V | Voltage output 20 VDC (+25%/-10%), max. 50 mA, supply voltage for external devices (e.g. sensors), SELV |
| KL3 | 6 | 4-20 mA | Use control / actual value input 4-20 mA, impedance 100 Ω, only as alternative to 0-10 V input, SELV |
| KL3 | 9, 11 | RSB | RS485 interface for ebmBus, RSB, SELV |
| KL3 | 10, 12 | RSA | RS485 interface for ebmBus, RSA, SELV |



Charts: Air flow 50 Hz

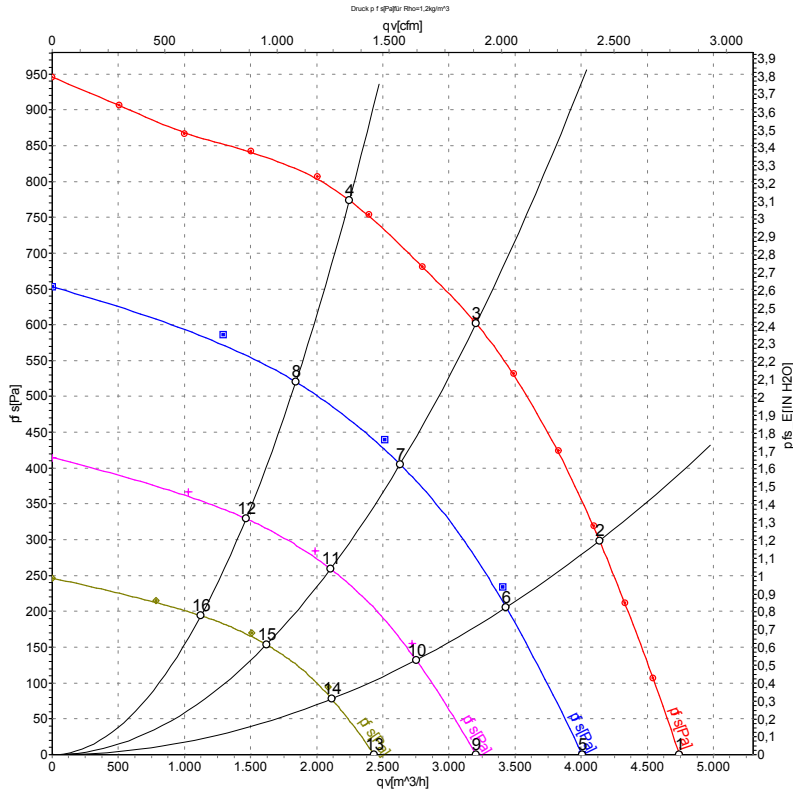

Measurement: LU-78488
 Measurement: LU-120618
 Measurement: LU-120619
 Measurement: LU-120620

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _{ed} | I | LpA _{in} | LwA _{in} | LwA _{out} | qv | p _{fs} |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | dB(A) | m ³ /h | Pa |
| 1 | 400 | 50 | 2200 | 690 | 1.35 | 81 | 88 | 94 | 4745 | 0 |
| 2 | 400 | 50 | 2200 | 859 | 1.61 | 77 | 84 | 90 | 4140 | 300 |
| 3 | 400 | 50 | 2200 | 950 | 1.75 | 73 | 80 | 86 | 3205 | 600 |
| 4 | 400 | 50 | 2200 | 851 | 1.61 | 76 | 83 | 88 | 2245 | 775 |
| 5 | 400 | 50 | 1825 | 386 | 0.72 | 74 | 81 | 87 | 4010 | 0 |
| 6 | 400 | 50 | 1825 | 476 | 0.87 | 70 | 77 | 84 | 3430 | 224 |
| 7 | 400 | 50 | 1825 | 502 | 0.90 | 67 | 74 | 80 | 2630 | 414 |
| 8 | 400 | 50 | 1825 | 462 | 0.84 | 69 | 76 | 82 | 1840 | 520 |
| 9 | 400 | 50 | 1450 | 206 | 0.43 | 67 | 73 | 79 | 3205 | 0 |
| 10 | 400 | 50 | 1450 | 251 | 0.51 | 64 | 71 | 77 | 2750 | 145 |
| 11 | 400 | 50 | 1450 | 265 | 0.53 | 61 | 67 | 73 | 2105 | 264 |
| 12 | 400 | 50 | 1450 | 244 | 0.49 | 62 | 69 | 74 | 1465 | 329 |
| 13 | 400 | 50 | 1100 | 106 | 0.26 | 58 | 65 | 71 | 2435 | 0 |
| 14 | 400 | 50 | 1100 | 123 | 0.29 | 56 | 63 | 68 | 2115 | 87 |
| 15 | 400 | 50 | 1100 | 126 | 0.29 | 53 | 60 | 66 | 1620 | 156 |
| 16 | 400 | 50 | 1100 | 118 | 0.28 | 54 | 61 | 67 | 1125 | 194 |

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side
 qv = Air flow · p_{fs} = Pressure increase

