

R3G500-AF34-21

# EC centrifugal fan

backward-curved, single-intake



R3G500-AF34-21 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen  
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
Amtsgericht (court of registration) Stuttgart · HRB 590142



## Nominal data

Type	R3G500-AF34-21	
Motor	M3G112-GA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	1160
Power consumption	W	810
Current draw	A	1.55
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	61.7	50.4	09 Power consumption $P_{ed}$	kW	0.79
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	5405
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	300
04 Efficiency grade N		73.3	62	10 Speed (rpm) n	min <sup>-1</sup>	1160
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$


LU-74028



## Technical description

Weight	13.3 kg
Fan size	500 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Number of blades	9
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F4-1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Output 20 VDC, max. 50 mA</li> <li>- Output for slave 0-10 V</li> <li>- Input for sensor 0-10 V or 4-20 mA</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 ebmBUS</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Via terminal box; With plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE



## Product drawing

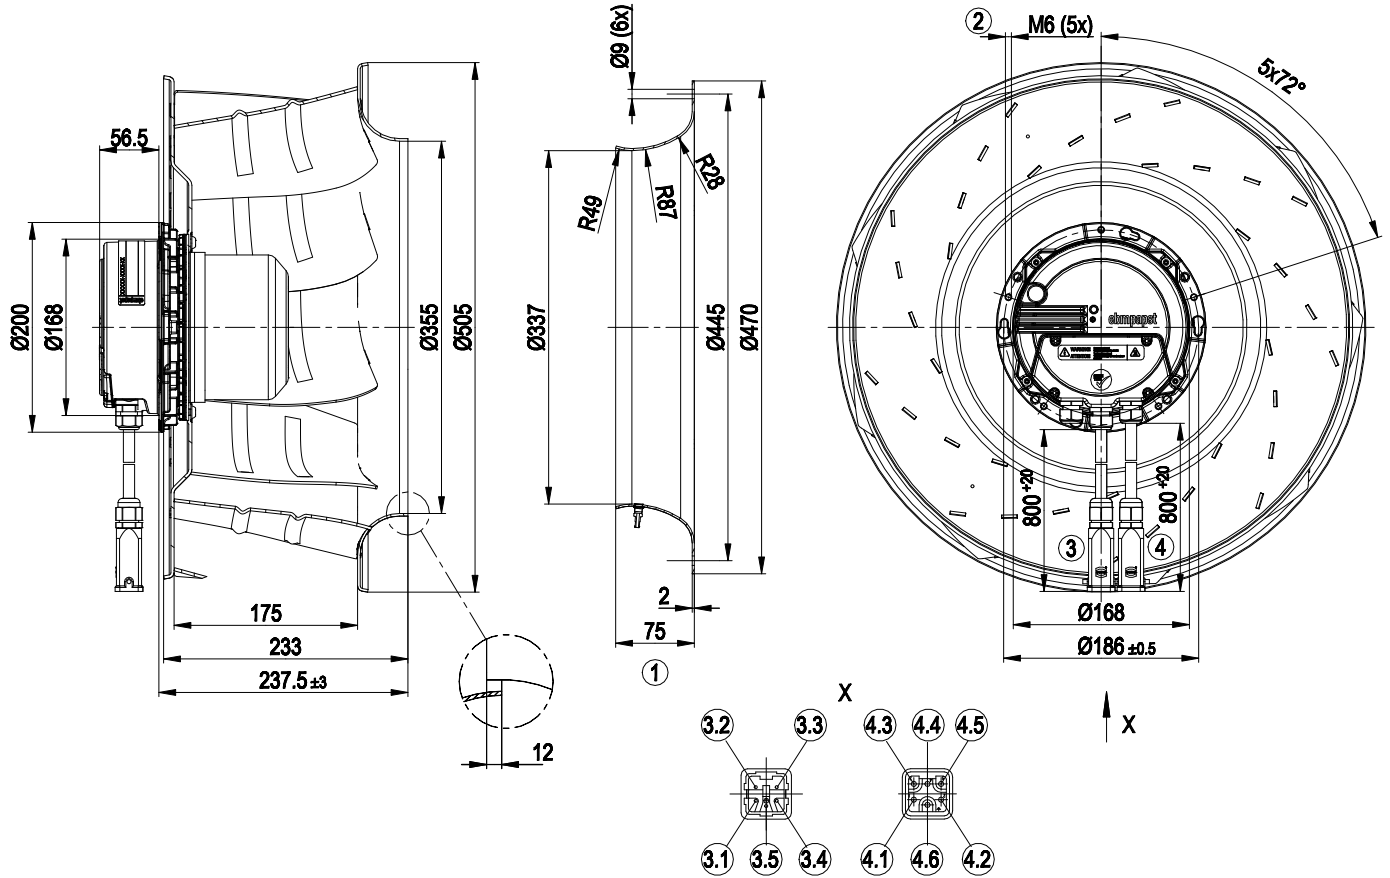

1	Accessory part: inlet ring 64025-2-4013, not included in scope of delivery
2	Clearance for screw 12-16 mm
3	Control wire with connector housing Harting 19 20 003 0420 and pin insert Harting 09 20 004 2611
3.1	NC (black1)
3.2	COM (black2)
3.3	GND (black3)
3.4	0-10 V (black4)
3.5	PE (not used)
4	Supply line with connector housing Harting 19 20 003 0420 and pin insert Harting 09 12 005 3001
4.1	L1 (black1)
4.2	L2 (black2)
4.3	L3 (black3)
4.4	not used
4.5	not used
4.6	PE (green/yellow)


## Connection diagram

### Customer circuit

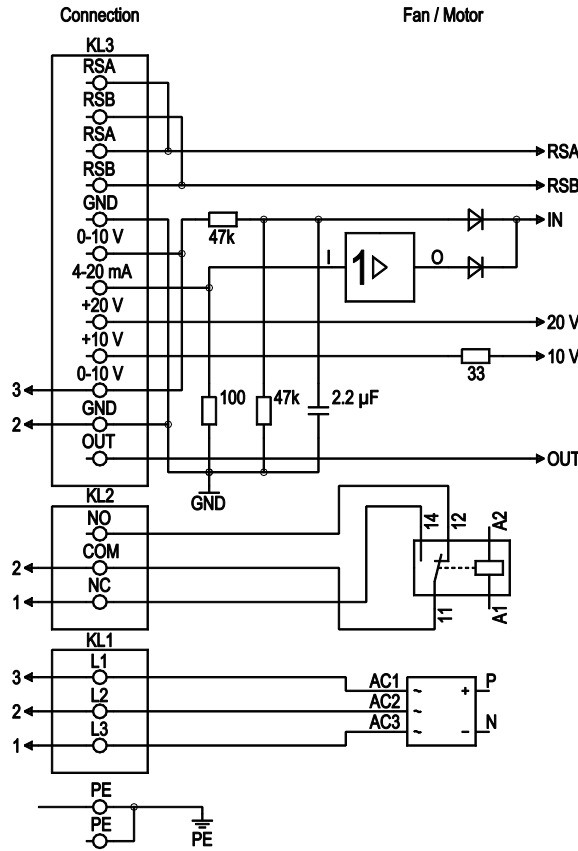

No.	Conn.	Designation	Function/assignment
PE		PE	Protective earth terminal
KL1	1, 2, 3	L1, L2, L3	Power supply 50/60 Hz
KL2	1	NC	Floating status contact, break for failure
KL2	2	COM	floating status contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
KL2	3	NO	Floating status contact, make for failure
KL3	1	OUT	Analog output, 0-10 VDC, max. 3 mA, SELV, output of current motor modulation level: 1 V corresponds to 10% modulation level. 10 V corresponds to 100% modulation level.
KL3	2, 8	GND	Reference ground for control interface, SELV
KL3	3, 7	0-10 V	Use control / current sensor value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
KL3	4	+10 V	Voltage output 10 VDC (±3%), max. 10 mA, power supply for external devices (e.g. potentiometer), SELV
KL3	5	+20 V	Voltage output 20 VDC (+25%/-10%), max. 50 mA, power supply for external devices (e.g. sensors), SELV
KL3	6	4-20 mA	Use control / current sensor value input 4-20 mA, impedance 100 Ω only as alternative to 0-10 V input, SELV
KL3	9, 11	RSB	RS485 interface for ebmBUS, RSB, SELV
KL3	10, 12	RSA	RS485 interface for ebmBUS, RSA, SELV

## Curves: Air performance 50 Hz

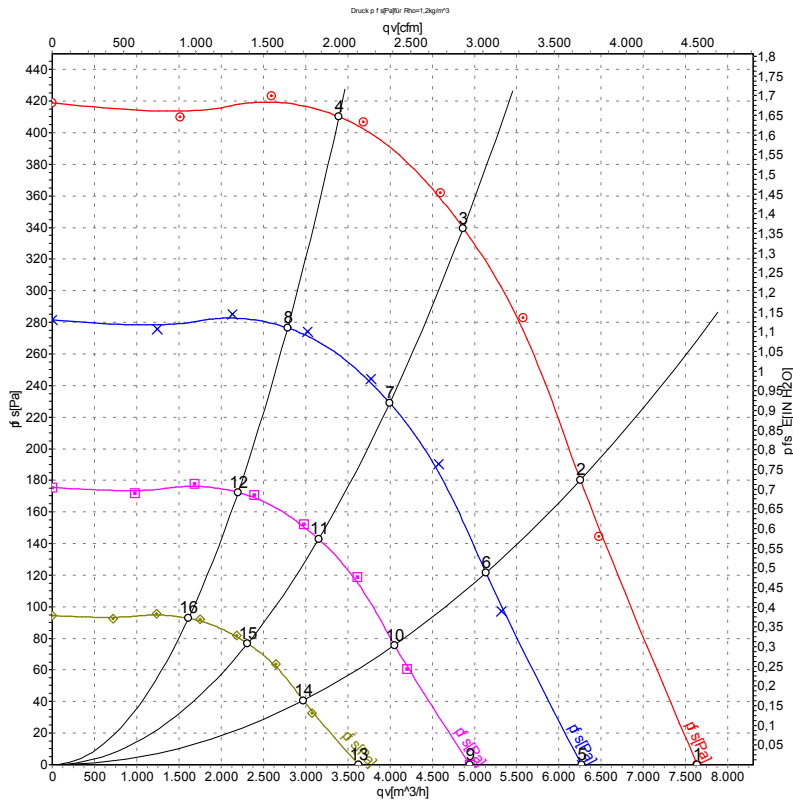

Measurement: LU-105321-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	qv	P <sub>fs</sub>	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	CFM	inH2O
1	400	50	1160	563	0.96	76	83	86	7640	0	4495	0.00
2	400	50	1160	721	1.22	69	76	80	6255	180	3680	0.72
3	400	50	1160	810	1.55	64	71	77	4865	340	2865	1.36
4	400	50	1160	726	1.22	64	72	77	3395	410	2000	1.65
5	400	50	950	311	0.53	72	79	81	6265	0	3690	0.00
6	400	50	950	399	0.67	65	72	76	5135	120	3020	0.48
7	400	50	950	445	0.73	60	67	73	3995	229	2350	0.92
8	400	50	950	402	0.68	60	67	73	2785	277	1640	1.11
9	400	50	750	153	0.26	67	74	76	4945	0	2910	0.00
10	400	50	750	196	0.33	60	67	71	4055	75	2385	0.30
11	400	50	750	219	0.36	55	62	68	3155	143	1855	0.57
12	400	50	750	198	0.33	55	62	68	2200	173	1295	0.69
13	400	50	550	60	0.10	60	67	69	3630	0	2135	0.00
14	400	50	550	77	0.13	53	60	64	2975	40	1750	0.16
15	400	50	550	86	0.14	48	55	61	2315	77	1360	0.31
16	400	50	550	78	0.13	48	55	61	1615	93	950	0.37

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · qv = Air flow · P<sub>fs</sub> = Pressure increase

