

# R3G560-AG07-15

Stulz GmbH

# EC centrifugal fan

backward curved, single inlet



R3G560-AG07-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142



## Nominal data

Type	R3G560-AG07-15	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
Speed	min <sup>-1</sup>	1350
Power input	W	2300
Current draw	A	3.6
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations

## Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.01

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

	Actual	Request 2013	Request 2015
Overall efficiency $\eta_{es}$	59.8	51.4	55.4
Efficiency grade N	66.4	58	62
Power input $P_{ed}$	kW	2.36	
Air flow $q_v$	m <sup>3</sup> /h	8010	
Pressure increase $p_{fs}$	Pa	599	
Speed n	min <sup>-1</sup>	1360	

Data established at point of optimum efficiency



R3G560-AG07-15

Stulz GmbH

# EC centrifugal fan


backward curved, single inlet

## Technical features

<b>Mass</b>	24 kg
<b>Size</b>	560 mm
<b>Surface of rotor</b>	Coated in black
<b>Material of electronics housing</b>	Die-cast aluminium
<b>Material of impeller</b>	Aluminium sheet
<b>Number of blades</b>	9
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Type of protection</b>	IP 54
<b>Insulation class</b>	"F"
<b>Humidity class</b>	F4-1
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	-40 °C
<b>Mounting position</b>	Shaft horizontal or rotor on bottom
<b>Condensate discharge holes</b>	Rotor-side
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"><li>- Output 10 VDC, max. 10 mA</li><li>- Output 20 VDC, max. 50 mA</li><li>- Output for slave 0-10 V</li><li>- Input for sensor 0-10 V or 4-20 mA</li><li>- Alarm relay</li><li>- Integrated PID controller</li><li>- Run monitoring</li><li>- Motor current limit</li><li>- PFC, passive</li><li>- RS485 ebmBUS</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Over-temperature protected electronics / motor</li><li>- Line undervoltage / phase failure detection</li></ul>
<b>EMC interference immunity</b>	Acc. to EN 61000-6-2
<b>EMC interference emission</b>	Acc. to EN 61000-6-3
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical leads</b>	Via terminal box
<b>Motor protection</b>	Reverse polarity and locked-rotor protection
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 61800-5-1; CE
<b>Approval</b>	UL 2111; GOST; VDE; CSA C22.2 Nr.77




Product drawing

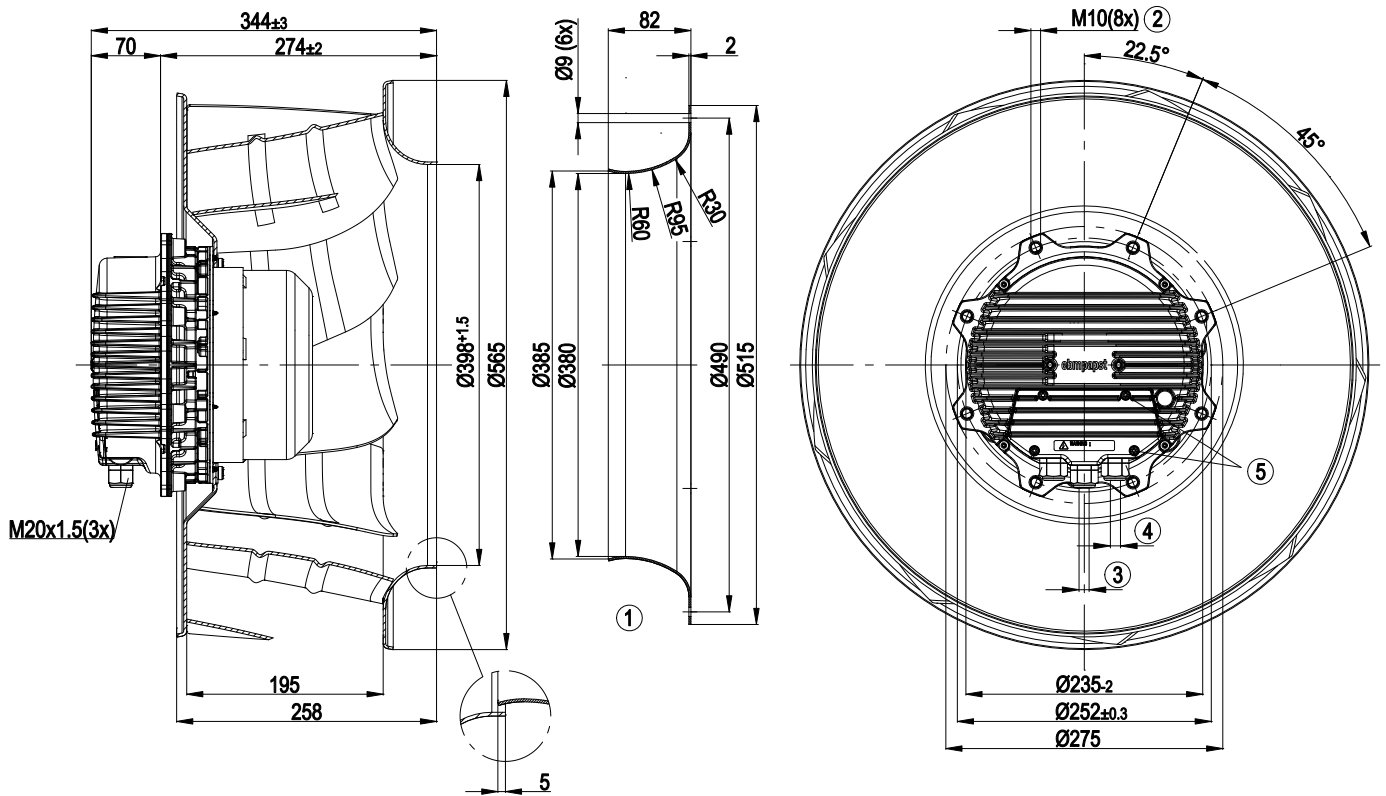


1	Accessory part: Inlet nozzle 63071-2-4013 not included in the standard scope of delivery, other inlet nozzles on request
2	Depth of screw max. 25 mm
3	Cable diameter: min. 4 mm, max. 10 mm, tightening torque: 4±0.6 Nm
4	Cable diameter: min. 6 mm, max. 12 mm, tightening torque: 4±0.6 Nm
5	Tightening torque 3.5±0.5 Nm

## Connection screen

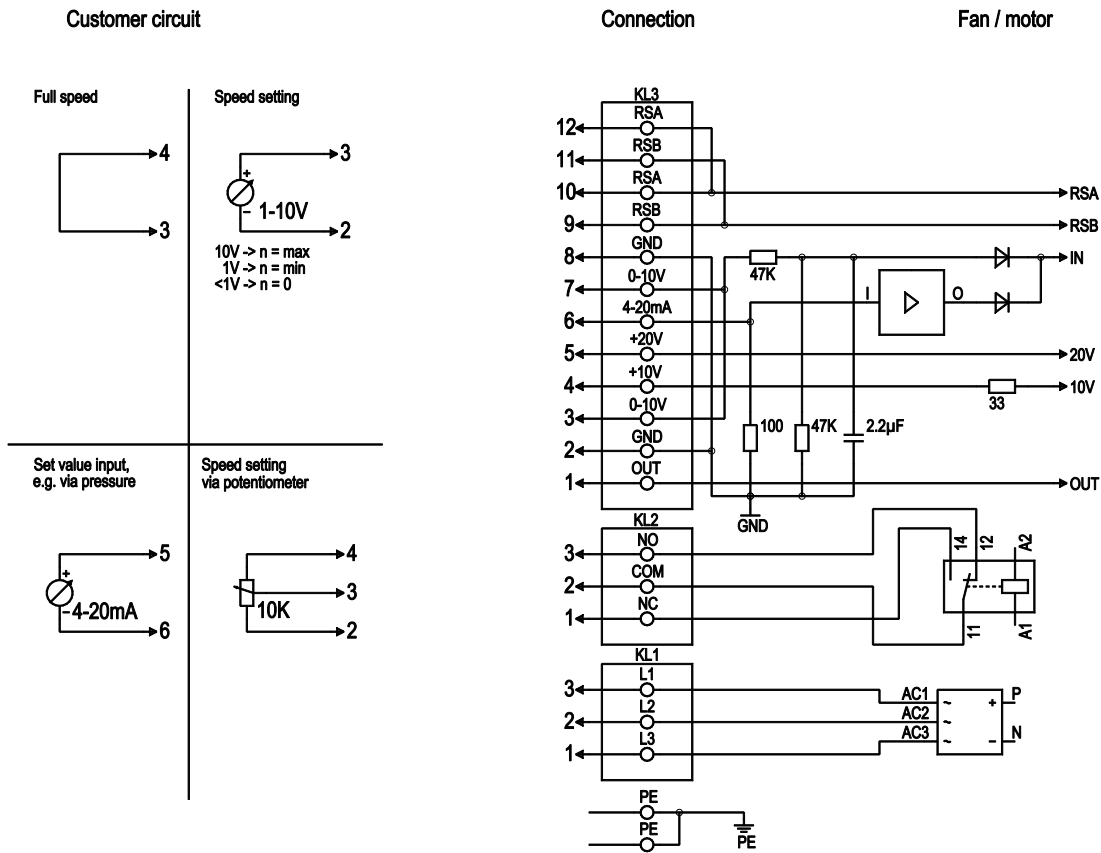

No.	Pin	Signal	Function / assignment
PE	-	PE	Protective earth connection
1	1, 2, 3	L1, L2, L3	Supply voltage 50 / 60 Hz
2	1	NC	Floating status message contact and run monitoring, normally closed for error or n < 80 / min
2	2	COM	Floating status message contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
2	3	NO	Floating status message contact and run monitoring, normally open for error or n < 80 / min
3	1	OUT	Analogue output, 0-10 VDC, max. 3 mA, SELV Output of the current motor level control coefficient: 1V corresponds to 10% modulation level. 10V corresponds to 100% modulation level
3	2, 8	GND	Reference mass for control interface, SELV
3	3, 7	0 -10 V	Use control / actual value input 0 -10 VDC, impedance 100 kohms only as alternative to 4-20 mA input, SELV
3	4	+ 10 V	Voltage output 10 VDC (+/-3%), max. 10 mA, supply voltage for ext. devices (e.g. potentiometer), SELV
3	5	+ 20 V	Voltage output 20 VDC (+25%/-10%), max. 50 mA, supply voltage for ext. devices (e.g. sensors), SELV
3	6	4-20 mA	Use control / actual value input 4-20 mA, impedance 100 ohms, only as alternative to 0-10 V input, SELV
3	9, 11	RSB	RS485 interface for ebm Bus, RSB; SELV
3	10, 12	RSA	RS485 interface for ebm Bus, RSA; SELV

## Charts: Air flow 50 Hz

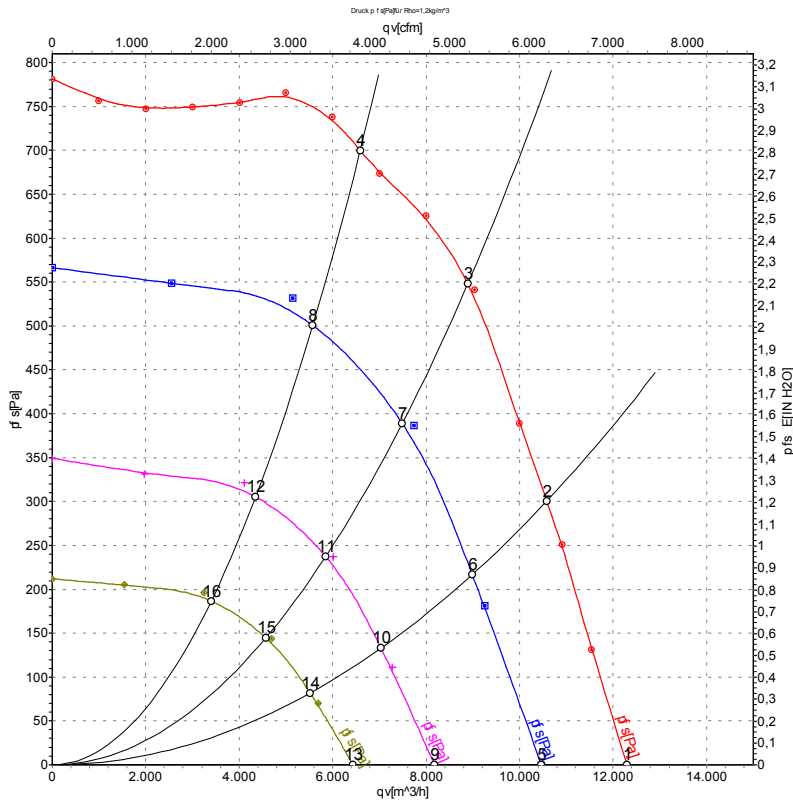

Measurement: LU-108580  
 Measurement: LU-111962  
 Measurement: LU-111961  
 Measurement: LU-111960

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	qv	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa
1	400	50	1350	1429	2.18	76	83	90	12300	0
2	400	50	1350	1983	3.03	74	81	88	10580	300
3	400	50	1350	2300	3.60	73	80	86	8890	550
4	400	50	1350	2225	3.39	73	80	86	6590	700
5	400	50	1150	842	1.32	72	79	85	10470	0
6	400	50	1150	1141	1.77	70	76	83	8985	218
7	400	50	1150	1320	2.03	68	75	81	7490	401
8	400	50	1150	1246	1.92	69	75	81	5575	508
9	400	50	900	420	0.74	65	72	78	8180	0
10	400	50	900	555	0.92	64	71	76	7035	134
11	400	50	900	642	1.04	63	70	75	5850	244
12	400	50	900	606	0.99	62	69	75	4350	311
13	400	50	700	213	0.43	60	68	73	6435	0
14	400	50	700	269	0.52	59	67	72	5520	83
15	400	50	700	304	0.58	58	67	73	4570	148
16	400	50	700	288	0.55	55	63	69	3400	190

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
 qv = Air flow · p<sub>fs</sub> = Pressure increase

