

R4D355-AO04-09 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142



Nominal data

| | | | |
|-----------------------------|--------------------|----------|------|
| Type | R4D355-AO04-09 | | |
| Motor | M4D094-EA | | |
| Phase | | 3~ | 3~ |
| Nominal voltage | VAC | 230 | 400 |
| Wiring | | Δ | Y |
| Frequency | Hz | 50 | 50 |
| Method of obtaining data | | ml | ml |
| Valid for approval/standard | | CE | CE |
| Speed (rpm) | min ⁻¹ | 1380 | 1380 |
| Power consumption | W | 285 | 285 |
| Current draw | A | 1.1 | 0.63 |
| Min. back pressure | Pa | 0 | 0 |
| Min. back pressure | inH ₂ O | 0 | 0 |
| Max. ambient temperature | °C | 80 | 80 |
| Starting current | A | 3.8 | 2.2 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

| | | Actual | Req. 2015 | | |
|-----------------------------------|---|--------|-----------|-------------------------------|------------------------|
| 01 Overall efficiency η_{es} | % | 45.5 | 45.5 | 09 Power consumption P_e | kW 0.27 |
| 02 Measurement category | | A | | 09 Air flow q_v | m ³ /h 1750 |
| 03 Efficiency category | | Static | | 09 Pressure increase p_{fs} | Pa 249 |
| 04 Efficiency grade N | | 62 | 62 | 10 Speed (rpm) n | min ⁻¹ 1385 |
| 05 Variable speed drive | | No | | 11 Specific ratio* | 1.00 |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$

LU-70441




Technical description

| | |
|--|--|
| Weight | 5.91 kg |
| Fan size | 355 mm |
| Rotor surface | Painted black |
| Impeller material | Sheet aluminum |
| Number of blades | 6 |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP54 |
| Insulation class | "F" |
| Moisture (F) / Environmental (H) protection class | F4-1 |
| Max. permitted ambient temp. for motor (transport/storage) | + 80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | - 40 °C |
| Installation position | Any |
| Condensation drainage holes | None |
| Mode | S1 |
| Motor bearing | Ball bearing |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA |
| Motor protection | Thermal overload protector (TOP) with basic insulation |
| With cable | Variable |
| Protection class | I (with customer connection of protective earth) |

AC centrifugal fan

backward-curved, single-intake


Product drawing

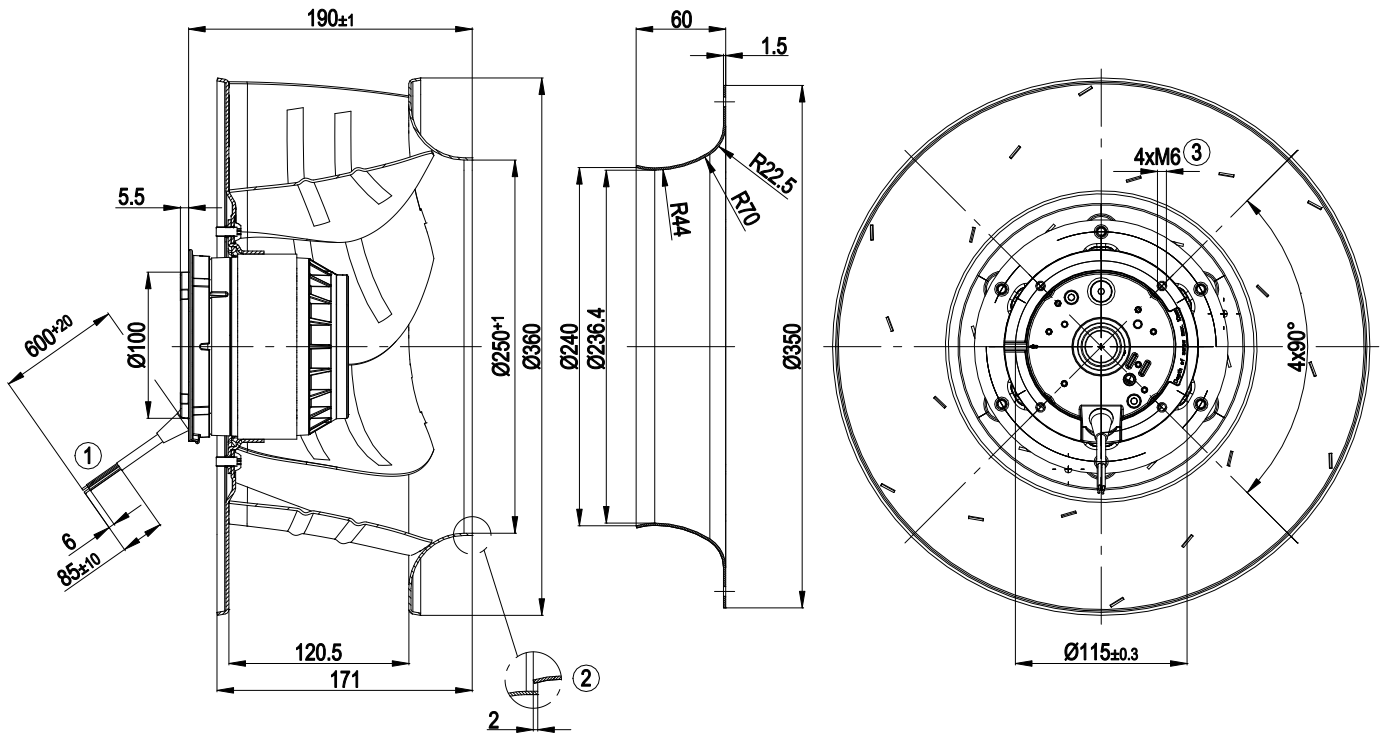

| | |
|---|---|
| 1 | Cable silicone 9G 0.5 mm ² , 9x crimped splices |
| 2 | Accessory part: inlet ring 35560-2-4013 not included in scope of delivery |
| 3 | Max. clearance for screw 10 mm |




Connection diagram

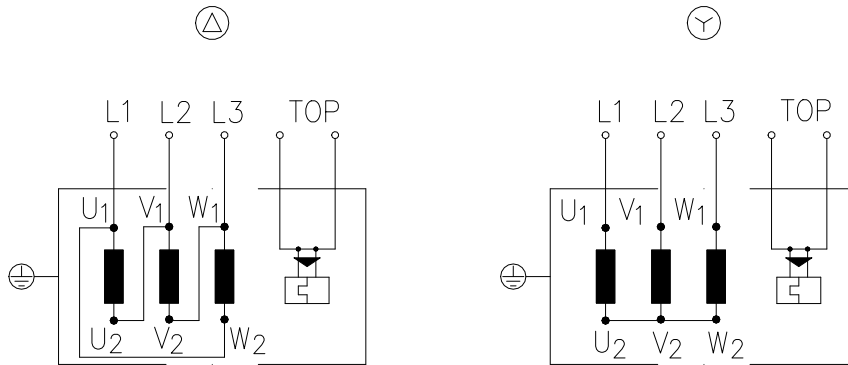

Change of rotation direction by reversing two phases

| | | | | | |
|----|------------------|----|-----------------|-----|--------------|
| Δ | Delta connection | Y | Star connection | L1 | = U1 = black |
| L2 | = V1 = blue | L3 | = W1 = brown | W2 | yellow |
| U2 | green | V2 | white | TOP | 2x gray |
| PE | green/yellow | | | | |

Curves: Air performance 50 Hz

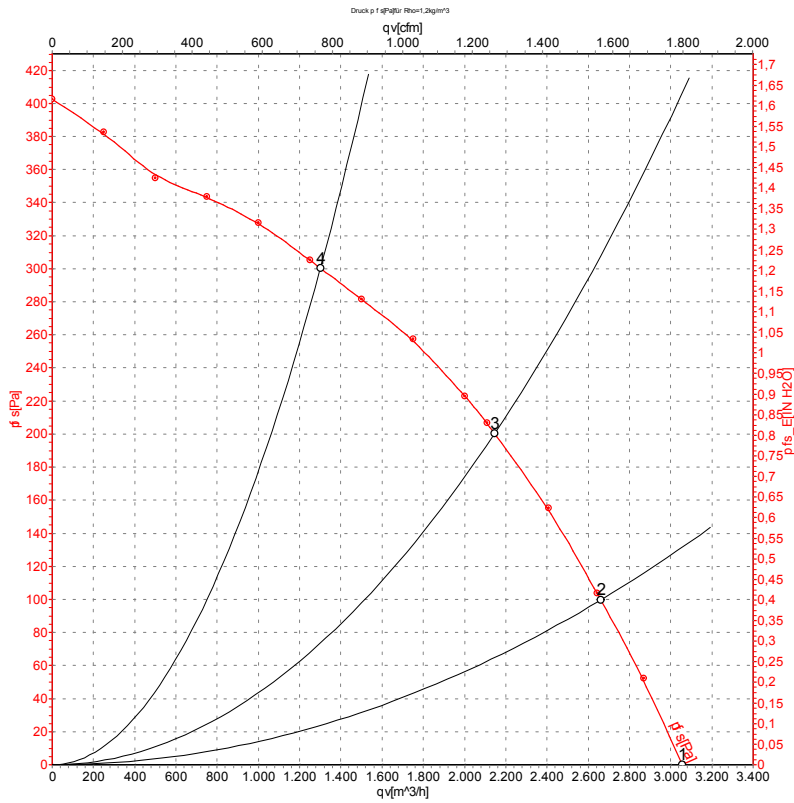

Measurement: LU-70441-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | Wired | U | f | n | P _e | I | qv | p _{fs} | qv | p _{fs} |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-----------------|------|-----------------|
| | | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa | CFM | inH2O |
| 1 | Y | 400 | 50 | 1410 | 223 | 0.57 | 3055 | 0 | 1800 | 0.00 |
| 2 | Y | 400 | 50 | 1395 | 258 | 0.60 | 2660 | 100 | 1565 | 0.40 |
| 3 | Y | 400 | 50 | 1380 | 285 | 0.63 | 2145 | 200 | 1265 | 0.80 |
| 4 | Y | 400 | 50 | 1390 | 264 | 0.60 | 1300 | 300 | 765 | 1.20 |

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

