

# AC centrifugal fan

backward curved, single inlet



R4E310-AH13-09 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                               |                   |         |         |
|-------------------------------|-------------------|---------|---------|
| Type                          | R4E310-AH13-09    |         |         |
| Motor                         | M4E074-EI         |         |         |
| Phase                         |                   | 1~      | 1~      |
| Nominal voltage               | VAC               | 115     | 115     |
| Frequency                     | Hz                | 60      | 60      |
| Type of data definition       |                   | fa      | fa      |
| Valid for approval / standard |                   | CE      | UL 2111 |
| Speed                         | min <sup>-1</sup> | 1670    | 1670    |
| Power input                   | W                 | 165     | 170     |
| Current draw                  | A                 | 1.45    | 1.43    |
| Motor capacitor               | µF                | 12      | 12      |
| Capacitor voltage             | VDB               | 220     | 220     |
| Capacitor standard            |                   | P0 (CE) | UL      |
| Min. back pressure            | Pa                | 0       | 0       |
| Max. ambient temperature      | °C                | 45      | 45      |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations




## Technical features

|                                                                    |                                                   |
|--------------------------------------------------------------------|---------------------------------------------------|
| Mass                                                               | 4.33 kg                                           |
| Size                                                               | 310 mm                                            |
| Surface of rotor                                                   | Coated in black                                   |
| Material of impeller                                               | Plastic PA6, fibreglass-reinforced                |
| Number of blades                                                   | 6                                                 |
| Direction of rotation                                              | Clockwise, seen on rotor                          |
| Type of protection                                                 | IP 54                                             |
| Insulation class                                                   | "B"                                               |
| Humidity class                                                     | F4-1                                              |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                           |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                           |
| Mounting position                                                  | Any                                               |
| Condensate discharge holes                                         | None                                              |
| Operation mode                                                     | S1                                                |
| Motor bearing                                                      | Ball bearing                                      |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA                                         |
| Motor protection                                                   | Thermal overload protector (TOP) wired internally |
| Cable exit                                                         | Lateral                                           |
| Protection class                                                   | I (if protective earth is connected by customer)  |
| Product conforming to standard                                     | EN 60335-1; CE                                    |
| Approval                                                           | UL 1004-1; CSA C22.2 Nr.100; CCC                  |

# AC centrifugal fan


backward curved, single inlet

## Product drawing

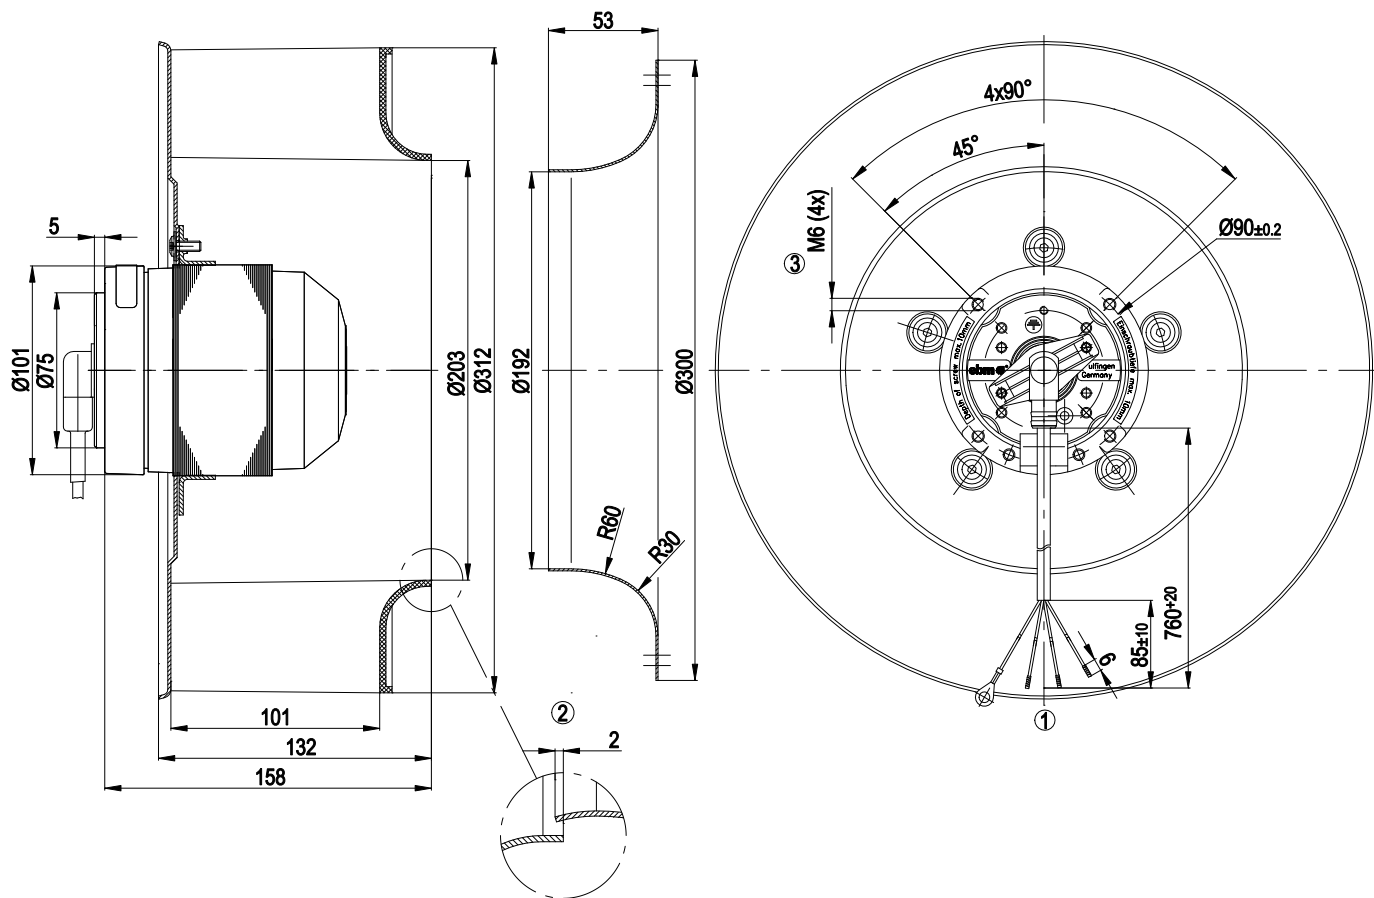

|   |                                                                                                              |
|---|--------------------------------------------------------------------------------------------------------------|
| 1 | Connection line PFA AWG20, 3 x brass lead tips crimped, crimped at earth wire contact stud AMP-Nr. 160 102-1 |
| 2 | Accessory part: Inlet nozzle 97512-2-4013, not included in the standard scope of delivery                    |
| 3 | Depth of screw max. 10 mm                                                                                    |

## Connection screen

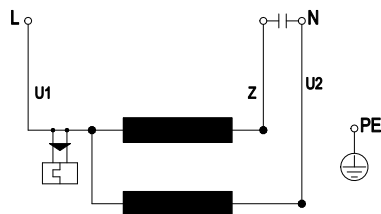


|    |              |   |       |    |       |
|----|--------------|---|-------|----|-------|
| U1 | blue         | Z | brown | U2 | black |
| PE | green/yellow |   |       |    |       |



# AC centrifugal fan

backward curved, single inlet

## Charts: Air flow 60 Hz

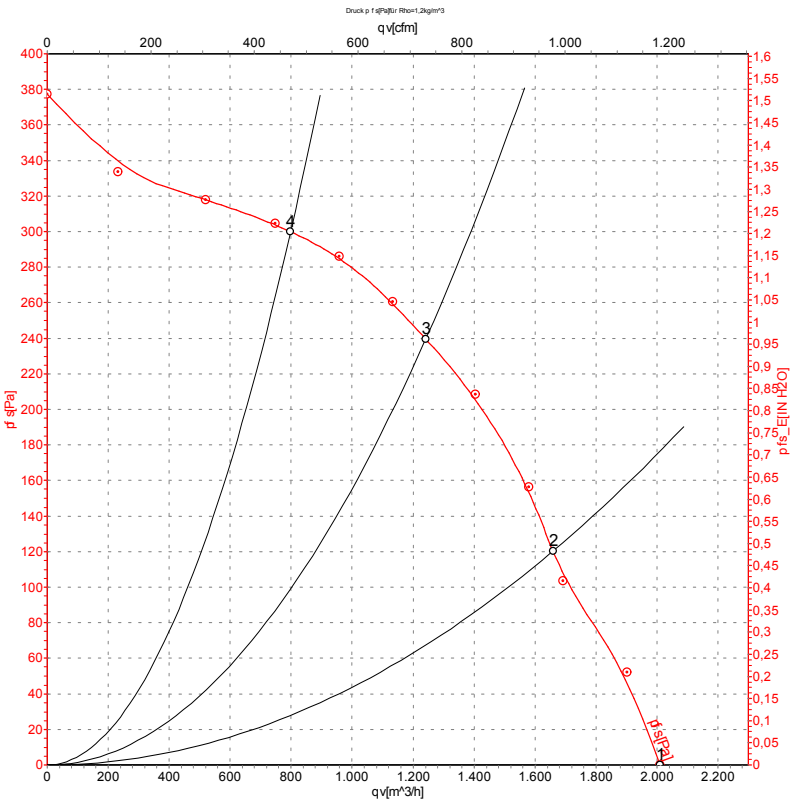

Measurement: LU-34204

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: L<sub>wA</sub> measured as per ISO 13347 /  
L<sub>pA</sub> measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qv   | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h | Pa              |
| 1 | 115 | 60 | 1670              | 165            | 1.45 | 2010 | 0               |
| 2 | 115 | 60 | 1625              | 184            | 1.64 | 1660 | 120             |
| 3 | 115 | 60 | 1600              | 199            | 1.77 | 1240 | 240             |
| 4 | 115 | 60 | 1630              | 182            | 1.61 | 800  | 300             |

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

