

Product Data Sheet **9595420413**
VBS0225XULDS
RER225-
63/18/2TDMLO

ebmpapst

engineering a better life



RER225-63/18/2TDMLO

INDEX

- 1 General 3**
- 2 Mechanics 3**
 - 2.1 General 3
 - 2.2 Connections 3
- 3 Operating Data 5**
 - 3.1 Electrical Interface - Input 5
 - 3.2 Electrical Operating Data 7
 - 3.3 Electrical Interface - Output 8
 - 3.4 Electrical Features 9
 - 3.5 Aerodynamics 10
 - 3.6 Sound Data 11
- 4 Environment 11**
 - 4.1 General 11
 - 4.2 Climatic Requirements 11
 - 4.3 EMC 11
- 5 Safety 13**
 - 5.1 Electrical Safety 13
 - 5.2 Approval Tests 13
- 6 Reliability 13**
 - 6.1 General 13

1 General

| | | |
|-------------------------------------|---|--|
| Fan type | Blower without chassis with intake nozzle | |
| Rotating direction looking at rotor | Clockwise | |
| Airflow direction | Air in axially, Air out radially | |
| Bearing system | Ball bearing | |
| Mounting position - shaft | Any | |

Please note:


"Sensorless commutation electronic, starting at the first start may not be 100% guaranteed, automatic restart occurs."

2 Mechanics**2.1 General**

| | | |
|-------------------|----------|--|
| Depth | 99,0 mm | |
| Diameter | 225,0 mm | |
| Mass | 1,027 kg | |
| Housing material | | |
| Impeller material | Plastic | |

2.2 Connections

| | | |
|-----------------------|-------------|--|
| Electrical connection | Wires | |
| Lead wire length | L = 425 mm | |
| Tolerance | + - 10,0 mm | |
| Tube length | S = 135 mm | |
| Tolerance | + - 5,0 mm | |

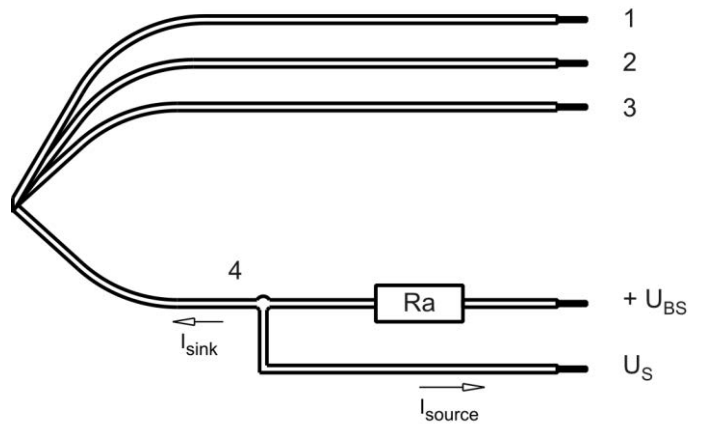

| Wire | Color | Operation | Wire size | Insulation diameter |
|------|--------|-----------|-----------|---------------------|
| 1 | red | + UB | AWG 22 | 1,70 mm |
| 2 | blue | - GND | AWG 22 | 1,70 mm |
| 3 | violet | CONTR | AWG 22 | 1,70 mm |
| 4 | white | Tacho | AWG 22 | 1,70 mm |

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.


3 Operating Data

3.1 Electrical Interface - Input


| | |
|---------------|--------|
| Control input | Analog |
|---------------|--------|

Features

| | |
|---------------------|----------------------------------|
| PWM - Frequency | 1 kHz - 10 kHz typical: 2 kHz |
| Input voltage range | 0 V - 10 V |

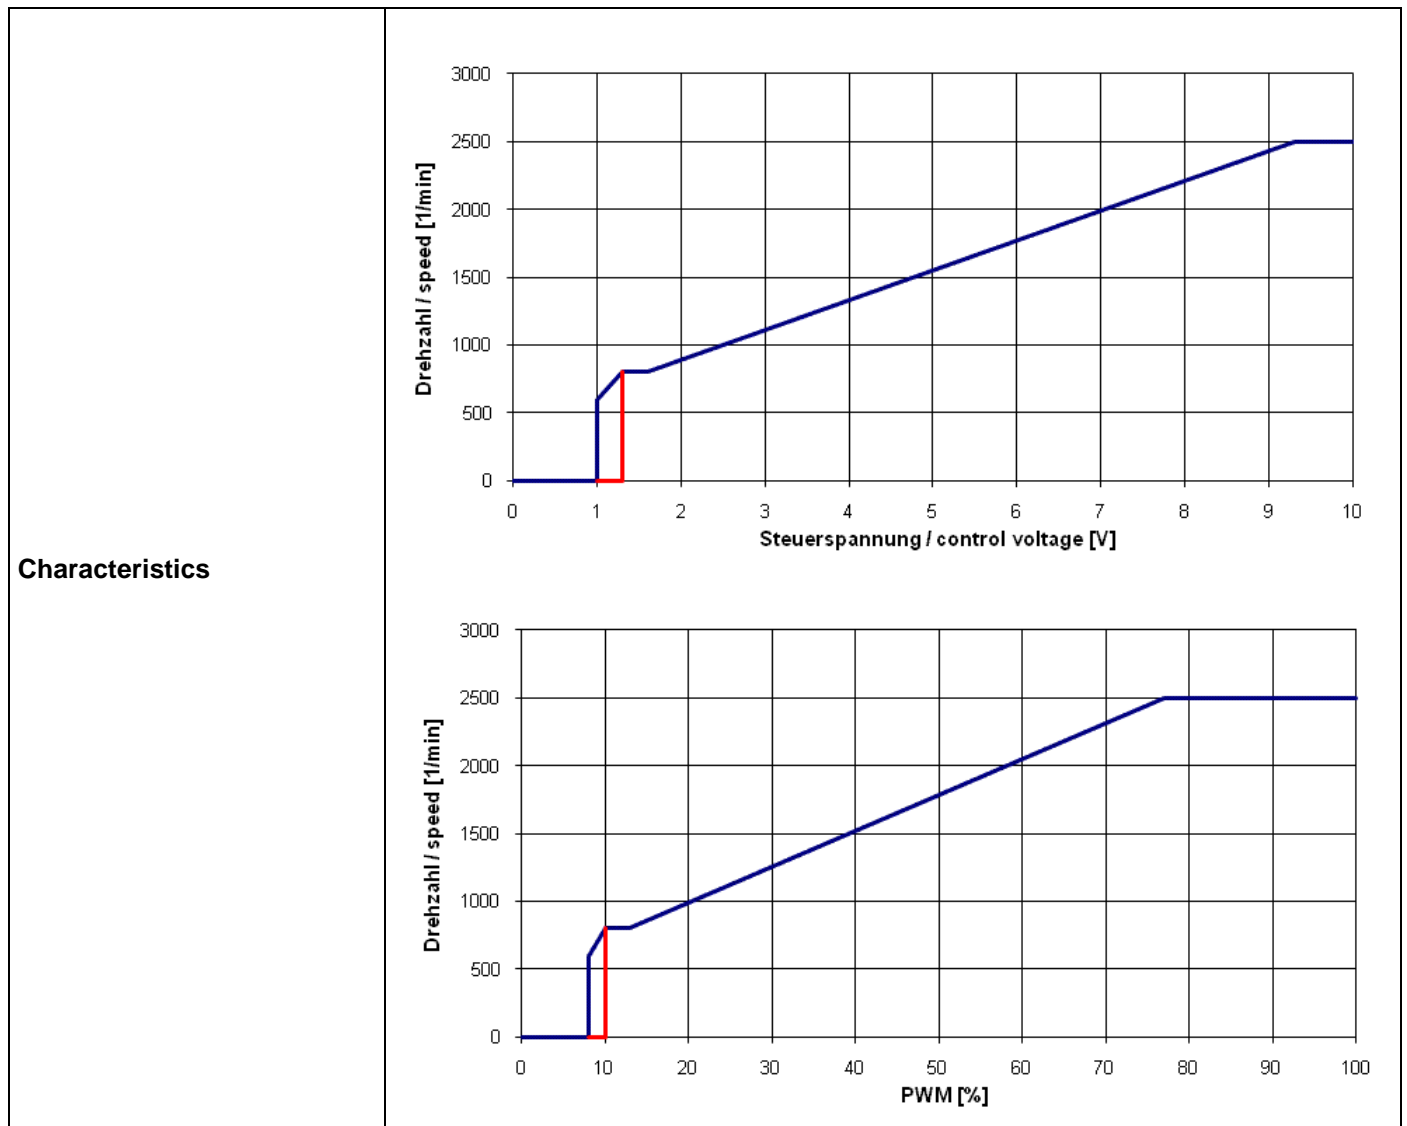

Schematics

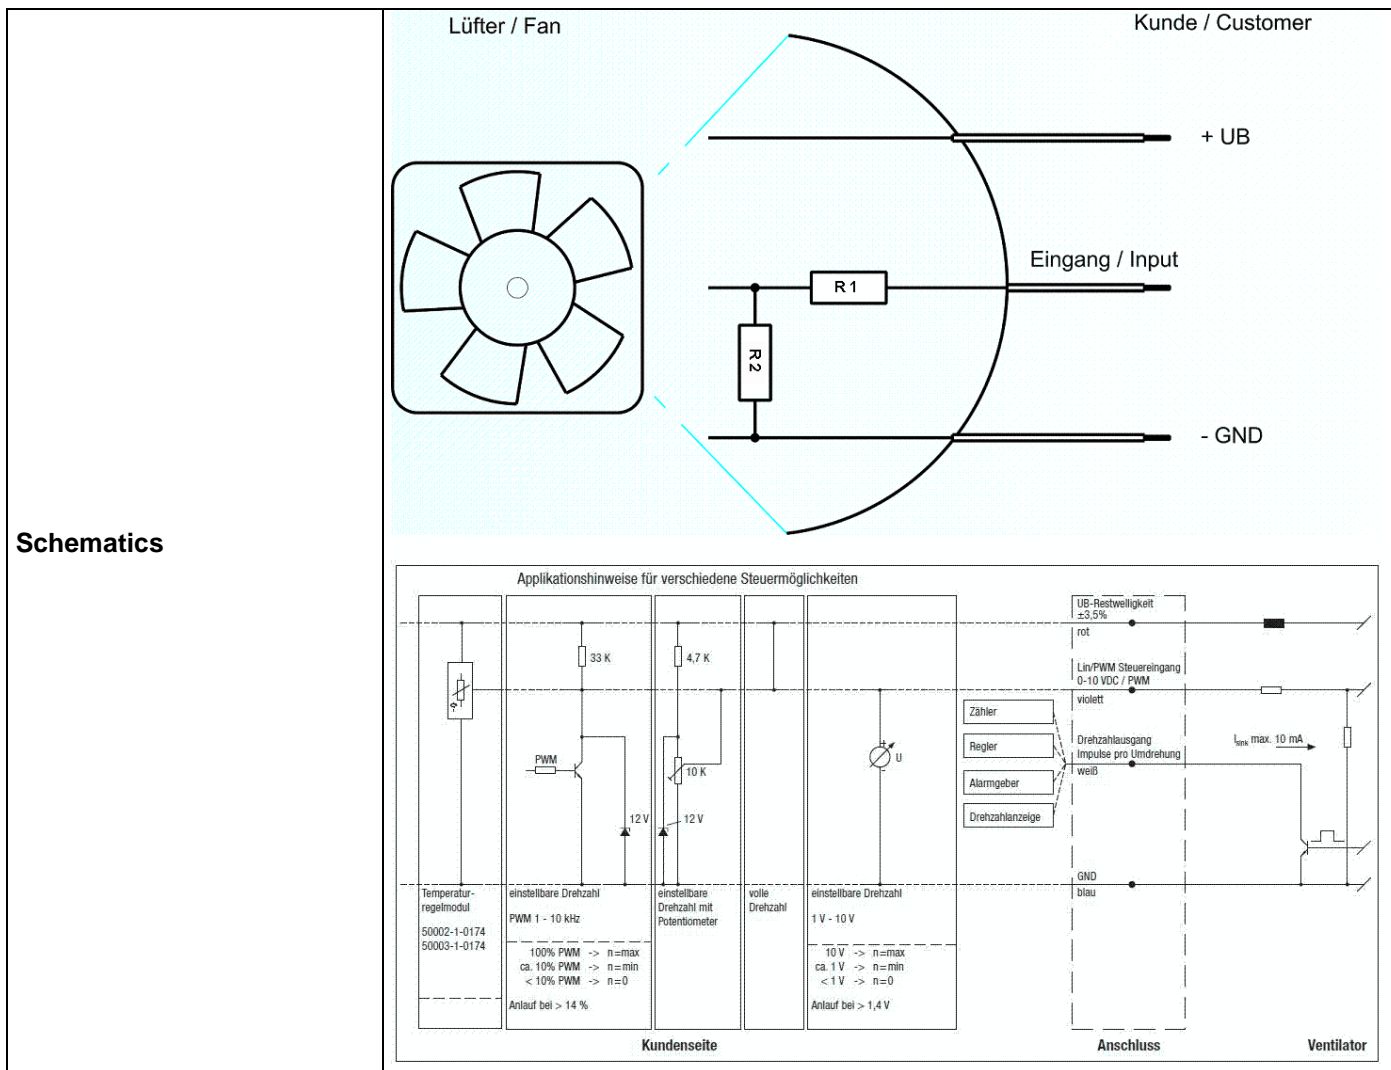

Input voltage divider:

R1 = 47 kOhm

R2 = 36 kOhm

For protection: There is parallel to R2 a 5,1 V Z-Diode

Speed control:

By pulse-width modulation (PWM) 0 ... 100%
 with switching transistor in emitter circuit and collector resistance to 12 V
 Frequency = 2 kHz (1 - 10 kHz)

Information to the curve PWM:

- 0% - <10% PWM: 0 1/min
- 10% PWM: 800 1/min (Fan on, coming from 0% PWM)
- 10% - 13% PWM: 800 1/min (corresponding to min. speed)
- 13% - 78% PWM: linear increasing curve
- 78% - 100% PWM: 2500 1/min (corresponding to max. speed)
- 10% - >8% PWM: linear decreasing curve (coming from 100% PWM)
- 8% PWM: 600 1/min or 0 1/min (Fan off, coming from 100% PWM)

oder:

Speed control:

By analog voltage 0 - 10 V

Information to the curve analog:

| | |
|------------------|---|
| 0 V - < 1,3 V: | 0 1/min |
| 1,3 V: | 800 1/min (Fan on, comming from von 0 V) |
| 1,3 V - 1,6 V: | 800 1/min (corresponding to min. speed) |
| 1,6 V - 9,4 V: | linear increasing curve |
| 9,4 V - 10 V: | 2500 1/min (corresponding to max. speed) |
| 1,3 V - > 1,0 V: | linear decreasing curve (comming from 10 V) |
| 1,0 V: | 600 1/min or 0 1/min (Fan off, comming from 10 V) |

All values are measured in the housing!

Fan doesn't have a sensor break detection!

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).
In the intake and outlet area should not be any solid obstruction within 0,5 m.

| | |
|--|-----------------------------------|
| Measurement setup: | Measured between two steel plates |
| Steel plate: | 266 mm x 266 mm |
| Intake nozzle: | D: 146 mm; R: 25 mm |
| Distance between bottom and top plate: | 123,5 mm |
| Overlapping impeller / nozzle: | 2 mm |

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)

I: corresp. to arithm. mean current value


| Name | Condition |
|---------------|----------------|
| U Contr. 0001 | U Contr.: 10 V |

Fan has no sensor break detection (**open control input = speed 0**)

| Features | Condition | Symbol | Values | | |
|---------------------|----------------|----------------|-------------|-------------|-------------|
| Voltage range | | U | 36 V | | 72 V |
| Nominal voltage | | U _N | | 48 V | |
| Power consumption | $\Delta p = 0$ | P | 77 W | 82 W | 82 W |
| Tolerance | U Contr. 0010 | | +/- 10,0 % | +/- 10,0 % | +/- 10,0 % |
| Current consumption | $\Delta p = 0$ | I | 2.150 mA | 1.700 mA | 1.100 mA |
| Tolerance | U Contr.0010 | | +/- 10,0 % | +/- 10,0 % | +/- 10,0 % |
| Speed | $\Delta p = 0$ | n | 2.500 1/min | 2.500 1/min | 2.500 1/min |
| Tolerance | U Contr. 0010 | | +/- 7,5 % | +/- 7,5 % | +/- 7,5 % |


3.3 Electrical Interface - Output

| | |
|------------|---------------------|
| Tacho type | /2 (open collector) |
|------------|---------------------|

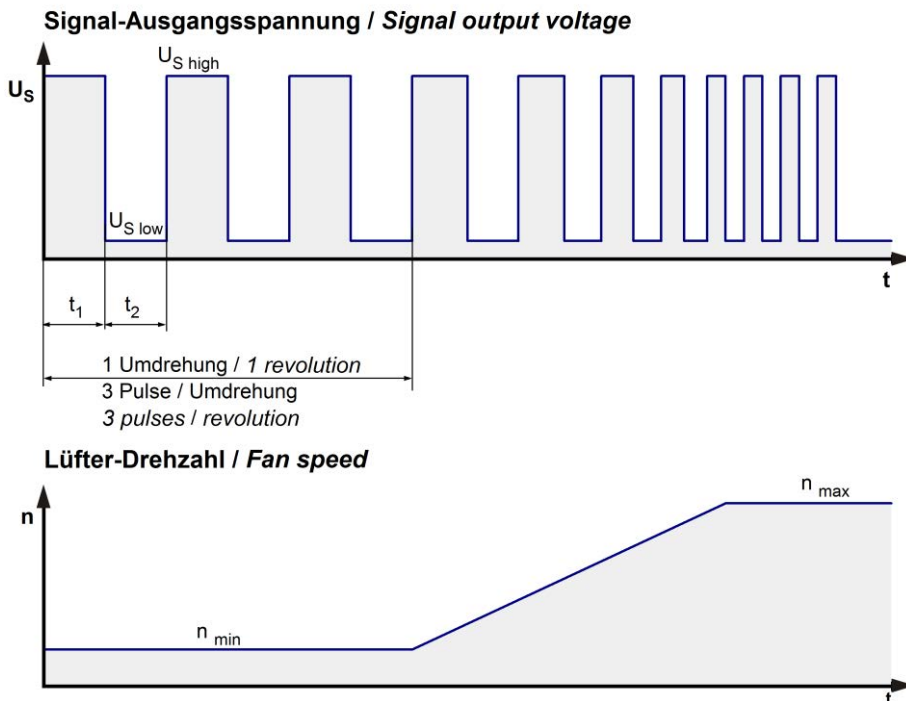

$$R_a = \frac{U_{BS} - U_{S\ low}}{I_{sink}}$$

Lüfter / Fan Kunde / Customer

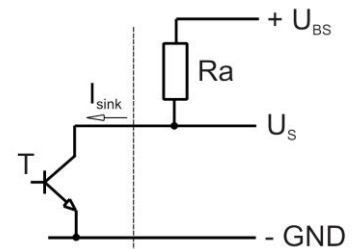

| Features | Note | Values |
|---------------------------|--|----------------------------|
| Tacho operating voltage | U_{BS} | $\leq 60,0\ V$ |
| Tacho signal Low | $U_{S\ low}$ | $\leq 0,4\ V$ |
| Tacho signal High | $U_{S\ high}$ | $\leq 60,0\ V$ |
| Maximum sink current | I_{sink} | $\leq 20\ mA$ |
| Maximum source current | | $0\ mA$ |
| External resistor | External resistor R_a from U_{BS} to U_S required. All voltages measured to GND. | |
| Tacho frequency | $(3 \times n) / 60$ | 125 Hz |
| Tacho isolated from motor | No | |
| Slew rate | | $\Rightarrow 0,5\ V/\mu s$ |


n = revolutions per minute (1/min)

Please note:

At zero speed the tacho signal is at a static HIGH. It will be also HIGH when the fan is still spinning, but the speed control signal is set to zero speed already.
 The tacho signal is only activated after the start-up is completed.

3.4 Electrical Features

| | | |
|--------------------------------|-----------------------------------|--|
| Electronic function | Speed-Controlled | |
| Reversed polarity protection | P-CH FET | |
| Max. residual current at U_N | $I_F \leq 5 \text{ mA}$ | |
| Locked rotor protection | Auto restart | |
| Locked rotor current at U_N | I_{block} approx. 3.000 mA | |
| Clock signal at locked rotor | t_3 / t_4 typical: 7 s / 10,0 s | |

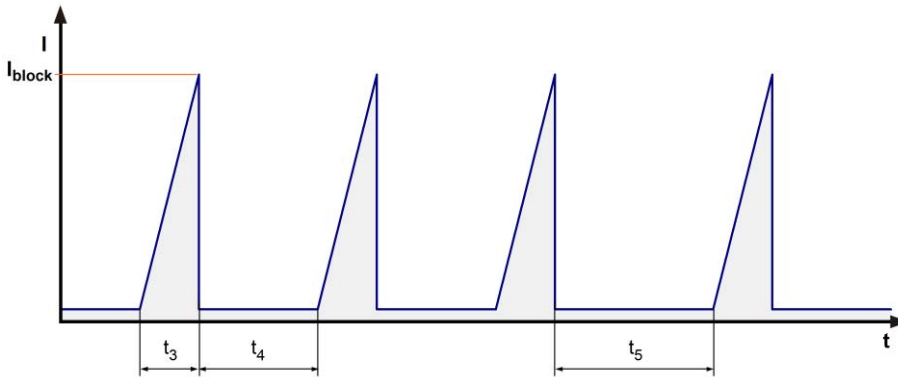

Locked rotor signal t_5 :

After 2 failed start-ups there is an extended timeout of 50 s.

3.5 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.


The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

| | |
|--|-----------------------------------|
| Measurement setup: | Measured between two steel plates |
| Steel plate: | 266 mm x 266 mm |
| Intake nozzle: | D: 146 mm; R: 25 mm |
| Distance between bottom and top plate: | 123,5 mm |
| Overlapping impeller / nozzle: | 2 mm |

a.) Operation condition:

| | | | |
|------------------------------|---------------|--|--|
| 2.500 1/min at free air flow | U Contr. 10 V | | |
|------------------------------|---------------|--|--|

| | | |
|---|-------------------------|--|
| Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$) | 1.175 m ³ /h | |
| Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$) | 435 Pa | |

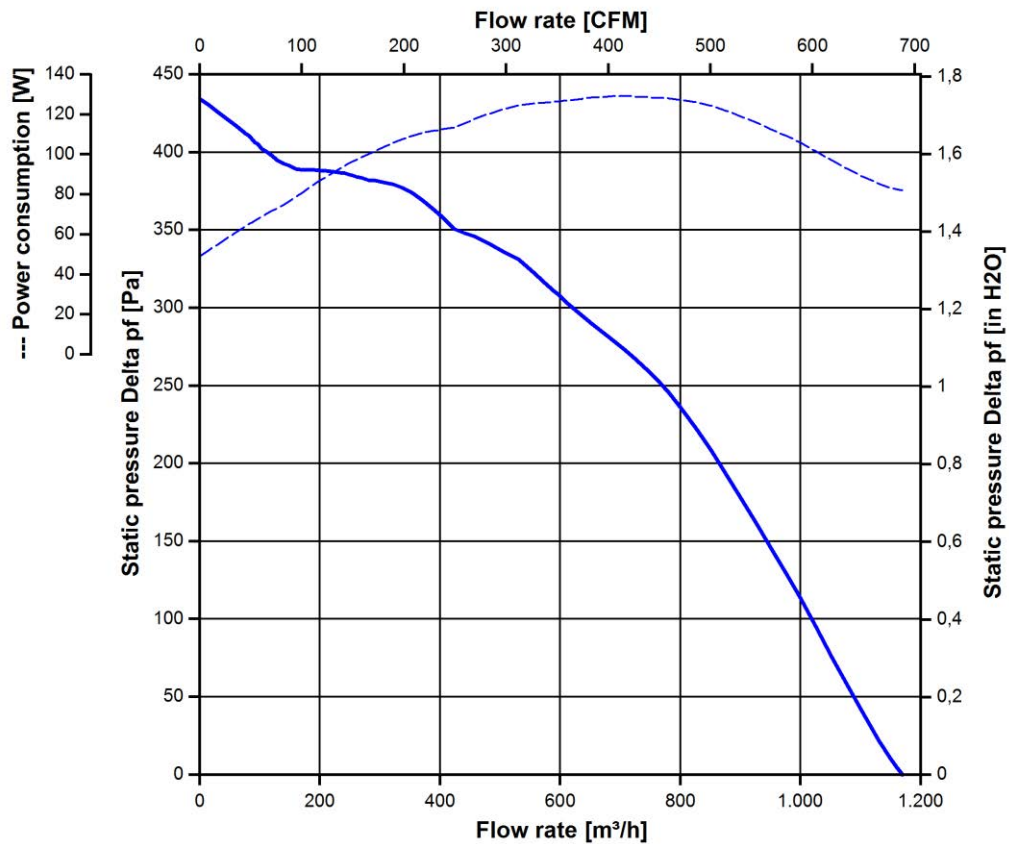

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
Sound power level: According to DIN 45635 Part 38 (ISO 10302)
Measured in a semianechoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

| | | | |
|------------------------------|---------------|--|--|
| 2.500 1/min at free air flow | U Contr. 10 V | | |
|------------------------------|---------------|--|--|

| | | | |
|---|--------------------------------|--|--|
| Optimal operating point | 295 m ³ /h @ 260 Pa | | |
| Sound power level at the optimal operating point | 4,3 bel(A) | | |
| Sound pressure level at free air flow, measured in rubber bands | | | |

4 Environment

4.1 General

| | | | |
|--|--------|--|--|
| Min. permitted ambient temperature TU min. | -20 °C | | |
| Max. permitted ambient temperature TU max. | 55 °C | | |
| Min. permitted storage temperature TL min. | -40 °C | | |
| Max. permitted storage temperature TL max. | 80 °C | | |

4.2 Climatic Requirements

| | | | |
|-----------------------|---|--|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days | | |
| Water exposure | None | | |
| Dust requirements | None | | |
| Salt fog requirements | None | | |

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments.

4.3 EMC

| | |
|------------------------|---|
| Kind | Radiated Emission; 30 MHz - 1000 MHz |
| According | DIN EN 55032:2016-02 |
| Check accuracy / Limit | Class B |
| Result | Below limit Class B |

| | |
|-----------------------|--|
| Kind | Electrostatic Discharge Immunity Test |
| Accordinging | DIN EN 61000-4-2:2001-12 |
| Ceck accuracy / Limit | Contact Discharge +/- 4 kV; Air Discharge +/- 8 kV |
| Result | A: The monitored function operates as designed during and after exposure to a disturbance. |

| | |
|-----------------------|--|
| Kind | Electromagnetic Field Immunity Test |
| Accordinging | DIN EN 61000-4-3:2006-12 |
| Ceck accuracy / Limit | 10 V/m; 80 - 1000 MHz; AM; m = 0,8; f = 1 kHz; 1%; t = 3 s |
| Result | A: The monitored function operates as designed during and after exposure to a disturbance. |

| | |
|-----------------------|--|
| Kind | Electrical Fast Transient / Burst Immunity Test |
| Accordinging | DIN EN 61000-4-4:2005-07 |
| Ceck accuracy / Limit | +/- 2 kV on Power Lines; Coupling: POS, NEG, {PE}, ALL, 5 kHz and 100 kHz; 1 min |
| Result | A: The monitored function operates as designed during and after exposure to a disturbance. |

| | |
|-----------------------|--|
| Kind | Immunity to Conducted Disturbances, Induced by RF-Fields |
| Accordinging | DIN EN 61000-4-6:2001-12 |
| Ceck accuracy / Limit | 10 Vrms; 150 kHz - 80 MHz; AM; m = 0,8; f = 1 kHz; 1%; t = 3 s |
| Result | A: The monitored function operates as designed during and after exposure to a disturbance. |

5 Safety

5.1 Electrical Safety

| | | |
|---|--|--|
| Dielectric strength DIN EN 62368 and DIN EN 60335 A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground. | 1000 VAC / 1 Min. 1700 VDC / 1 Sec. | |
| Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min. | RI > 10 MOhm | |
| Clearance / creepage distance | 1,0 mm / 1,5 mm | |
| Protection class | I | |

5.2 Approval Tests

| | | |
|-----|---|-----|
| CE | EC Declaration of Conformity | Yes |
| EAC | Eurasian Conformity | Yes |
| UL | Underwriters Laboratories | Yes |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes |
| CSA | Canadian Standards Association | Yes |
| CCC | China Compulsory Certification | Yes |

6 Reliability

6.1 General

| | | |
|--|----------|--|
| Life expectancy L10 at TU = 40 °C | 55.000 h | |
| Life expectancy L10 at TU max. | 40.000 h | |
| Life expectancy L10 acc. to IPC 9591 at TU = 40 °C | 92.500 h | |

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent. Utility model or design. Refer to protection notice ISO 18016.

