



RG190-39/18/2TDMLO

RG190-39/18/2TDMLO (9595414743) ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Customer specification: No
Version: 1.2
Created: 19.05.2025

Technical project manager:
Gutmann, Markus, 016

Responsible for technical design:
Kieninger, Annemarie, 018

Responsible for electronical design:
Künstle, Manuel, 014

INDEX

1 General 2
2 Mechanics 2
2.1 General 2
2.2 Motor 2
2.3 Connections 2
3 Operating Data 4
3.1 Electrical Interface - Input 4
3.2 Electrical Operating Data 6
3.3 Electrical Interface - Output 8
3.4 Electrical Features 9
3.5 Aerodynamics 10
3.6 Sound Data 11
4 Environment 11
4.1 General 11
4.2 Climatic Requirements 11
4.3 Mechanical Requirements 11
4.4 EMC 12
5 Safety 13
5.1 Electrical Safety 13
5.2 Approval Tests 13
6 Reliability 13
6.1 General 13
6.2 Additional Data 14

Special features according to company standard 1-23.00 have the following definitions:

"A" : Product features or process parameters which influence the safety of a product or the compliance of legal requirements. (Must not necessary verified and documented 100%. Standards and legal requirements must be considered.)

"FK" : Product features or process parameters which influence the fit and function of a product or which have to be controlled or documented for some other reasons (e.g. Customer requirements).

Product features or process parameters which do not have the status of a special characteristic in case of FMEA, but which still require inspection from the point of view of development. For more information take a look at WN 1-23.00.

1 General

Fan type	Blower	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Axial: intake; centrifugal: exhaust	
Bearing system	Ball bearing	
Lubrication	See sectional drawing of the bearing	
Mounting position - shaft	Any	
Tolerance		
Balancing grade	6,3	FK
Impeller weight	505 g	

Please note:

Sensorless commutation electronic, starting at the first start may not be 100% guaranteed, automatic restart occurs.

2 Mechanics
2.1 General


Width	226 mm	
Height	226 mm	
Depth	85,5 mm	
Diameter	0,0 mm	
Mass	1,21 kg	
Housing material	Plastic	
Impeller material	Plastic	

2.2 Motor

Type of motor	Electronically commutated external rotor	
Diameter of the motor	54,0 mm	
Height of the motor	14,0 mm	
Number of phases	3	
Number of windings	3	
Operating mode	Continuous duty	
Insulation material class	E	

2.3 Connections

Electrical connection	Wires	
Lead wire length	L = 350 mm	FK
Tolerance	+ - 10 mm	
Tube length	S = 35 mm	
Tolerance	+ - 5 mm	
Plug	See drawing	
Contact	See drawing	

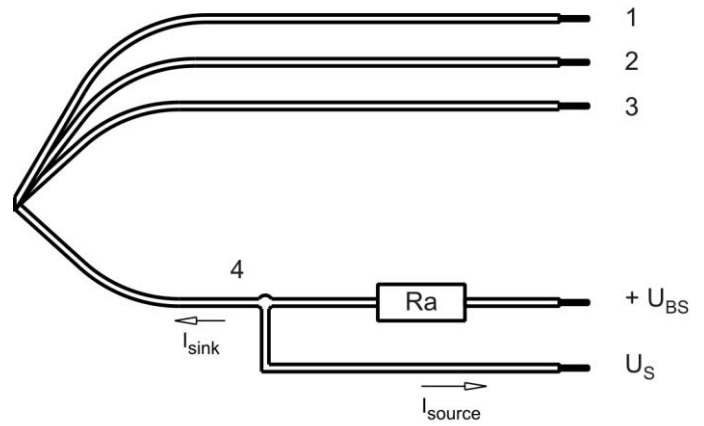

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 22	1,7 mm
2	blue	- GND	AWG 22	1,7 mm
3	violet	CTRL	AWG 22	1,7 mm
4	white	Tacho	AWG 22	1,7 mm


The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.


3 Operating Data

3.1 Electrical Interface - Input

Control input	Analog	
PWM - Frequency		1 kHz - 10 kHz typical: 2 kHz
Input voltage range		0 V - 10 V

Characteristics

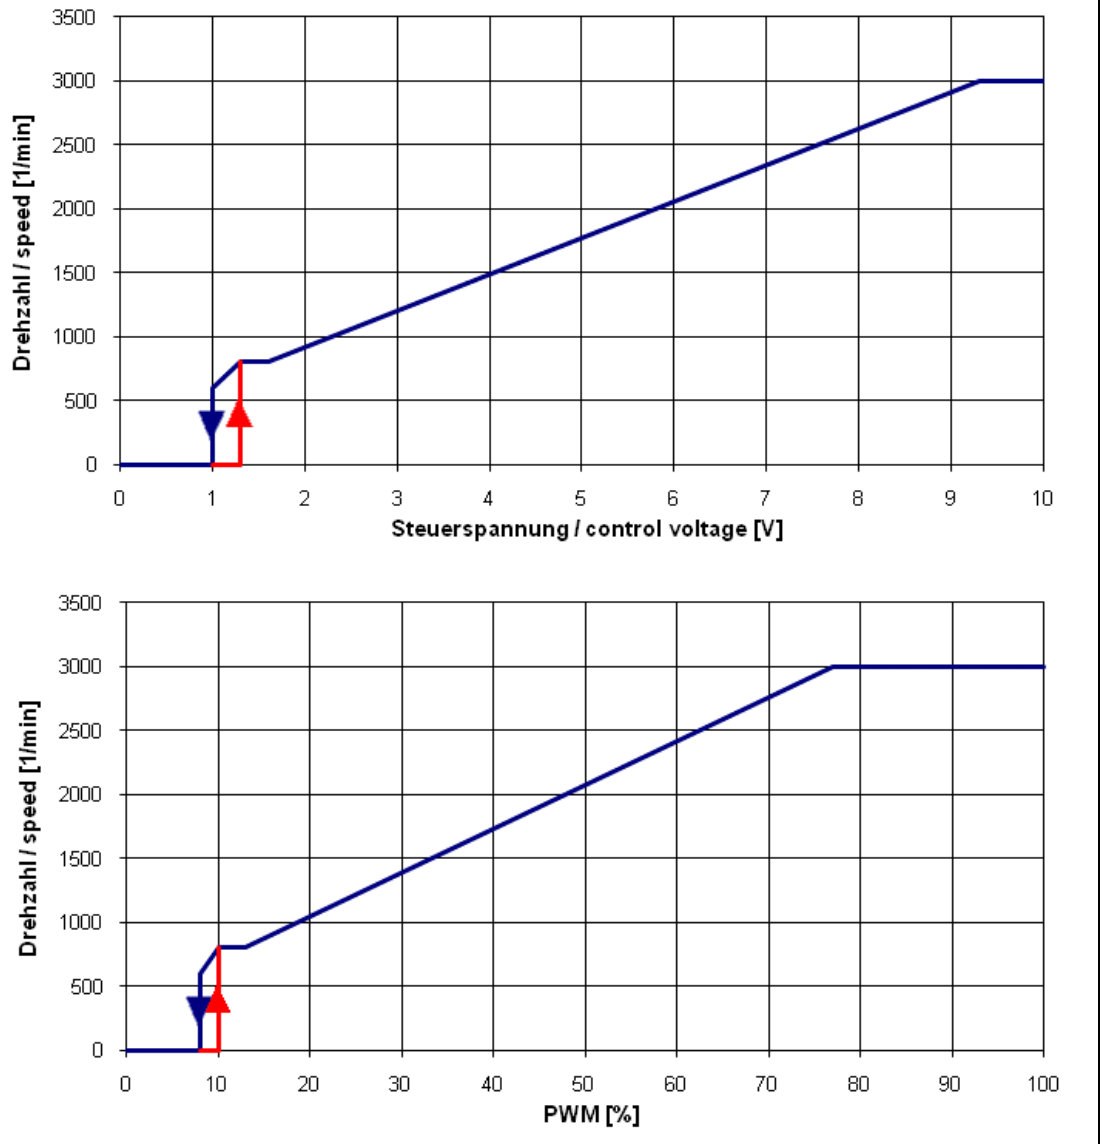

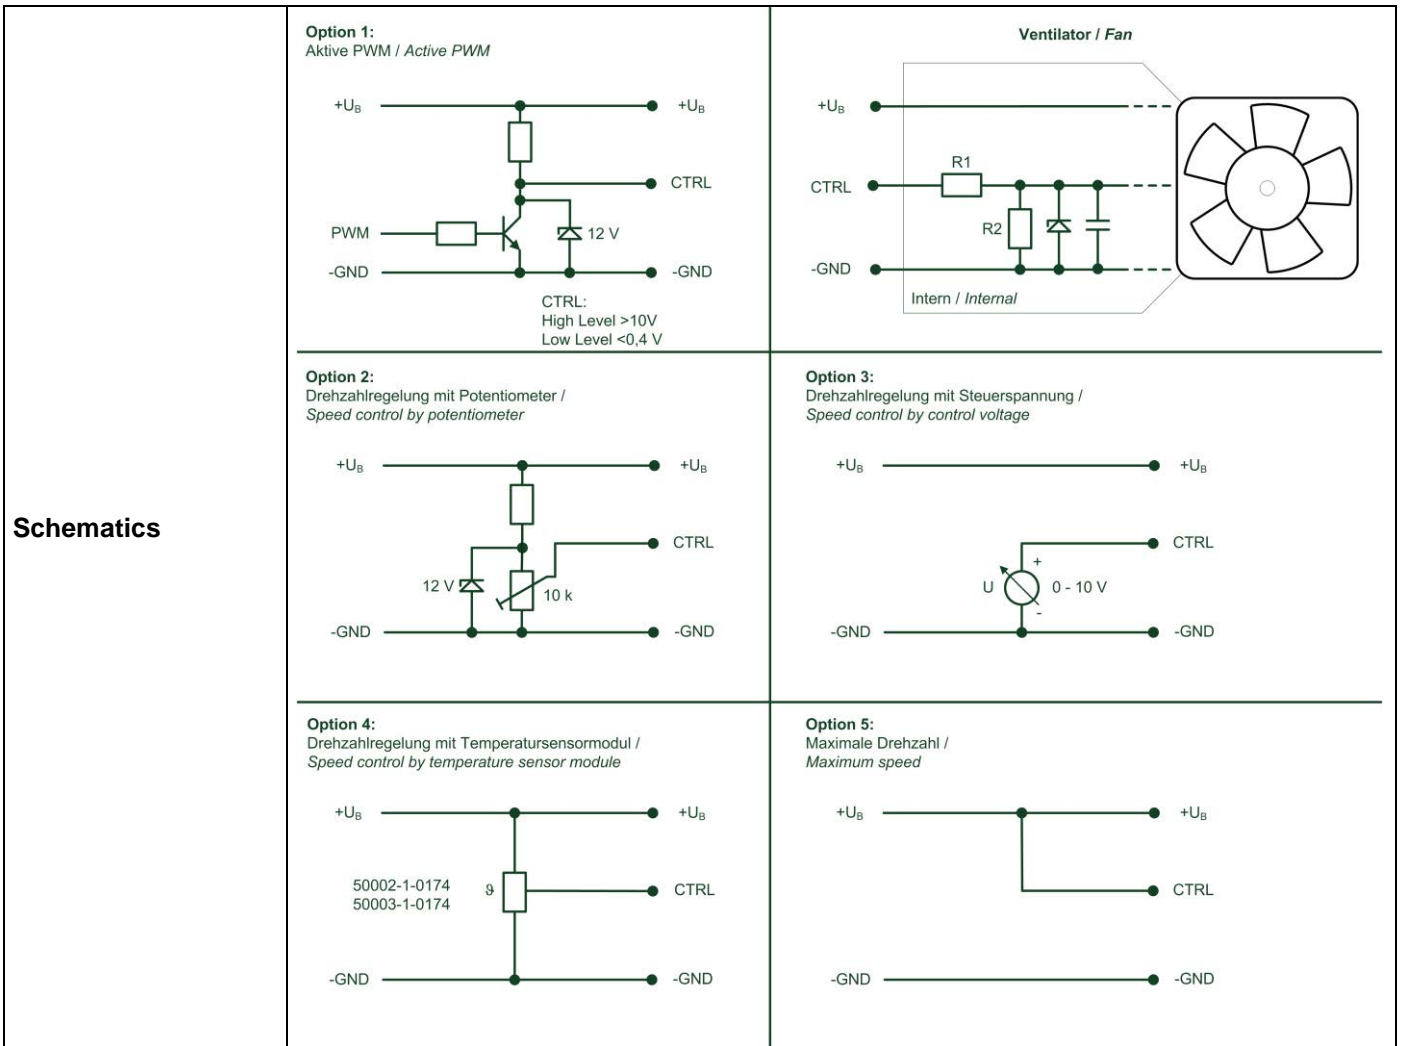

Input voltage divider:

R1 = 47 kOhm

R2 = 36 kOhm

For protection: There is parallel to R2 a 5,1 V Z-Diode

Speed control:

By pulse-width modulation (PWM) 0 ... 100%

with switching transistor in emitter circuit and collector resistance to 12 V

Frequency = 2 kHz (1 - 10 kHz)

Information to the curve PWM:

0% - <10% PWM:	0 1/min
10% PWM:	800 1/min (Fan on, coming from 0% PWM)
10% - 13% PWM:	800 1/min (corresponding to min. speed)
13% - 78% PWM:	linear increasing curve
78% - 100% PWM:	3.000 1/min (corresponding to max. speed)
10% - >8% PWM:	linear decreasing curve (coming from 100% PWM)
8% PWM:	600 1/min or 0 1/min (Fan off, coming from 100% PWM)

or:

Speed control:

By analog voltage 0 - 10 V

Information to the curve analog:

0 V - < 1,3 V:	0 1/min
1,3 V:	800 1/min (Fan on, comming from von 0 V)
1,3 V - 1,6 V:	800 1/min (corresponding to min. speed)
1,6 V - 9,4 V:	linear increasing curve
9,4 V - 10 V:	3.000 1/min (corresponding to max. speed)
1,3 V - > 1,0 V:	linear decreasing curve (comming from 10 V)
1,0 V:	600 1/min or 0 1/min (Fan off, comming from 10 V)

All measurement values are measured in the housing!

Fan has no sensor break detection!

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).
In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)
I: corresp. to arithm. mean current value

Name	Condition
U Contr. 0001	U Contr.: 10 V

Features	Condition	Symbol	Values		
Voltage range		U	36,0 V		57,0 V
Nominal voltage		U _N		48,0 V	
Power consumption	$\Delta p = 0$	P	40,7 W	52,8 W	52,5 W
Tolerance	U Contr. 0001		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	1.130 mA	1.100 mA*)	920 mA
Tolerance	U Contr. 0001		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	2.740 1/min	3.000 1/min*)	3.000 1/min
Tolerance	U Contr. 0001		+/- 10,0 %	+/- 5,0 %	+/- 5,0 %
Starting current consumption				1.500 mA	
max. allowed input voltage ripple (within the specified voltage range)			+/- 3 %		
max. allowed input voltage ripple (within the specified voltage range)			>= 50 Hz		

Name	Condition
U Contr. 0002	U Contr.: 5 V

Features	Condition	Symbol	Values		
Voltage range		U	36,0 V		57,0 V
Nominal voltage		U _N		48,0 V	
Power consumption	$\Delta p = 0$	P	12,6 W	13,0 W	14,8 W
Tolerance	U Contr. 0002		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	340 mA	270 mA	260 mA
Tolerance	U Contr. 0002		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	1.800 1/min	1.800 1/min	1.800 1/min
Tolerance	U Contr. 0002		+/- 5,0 %	+/- 5,0 %	+/- 5,0 %

The data at 5V are no FK features and need not be tested.

Name	Condition
U Contr. 0003	U Contr.: 1,5 V

Features	Condition	Symbol	Values		
Voltage range		U	36,0 V		57,0 V
Nominal voltage		U _N		48,0 V	
Power consumption	$\Delta p = 0$	P	2,3 W	2,4 W	2,9 W
Tolerance	U Contr. 0003		+/- 15,0 %	+/- 15,0 %	+/- 15,0 %
Current consumption	$\Delta p = 0$	I	65 mA	50 mA	50 mA
Tolerance	U Contr. 0003		+/- 15,0 %	+/- 15,0 %	+/- 15,0 %
Speed	$\Delta p = 0$	n	800 1/min	800 1/min	810 1/min
Tolerance	U Contr. 0003		+/- 10,0 %	+/- 10,0 %	+/- 10,0 %


Name	Condition
U Contr. 0004	U Contr.: 0 V

Features	Condition	Symbol	Values		
Voltage range		U	36,0 V		57,0 V
Nominal voltage		U _N		48,0 V	
Power consumption	$\Delta p = 0$	P	0,3 W	0,4 W	0,5 W
Tolerance	U Contr. 0004		+/- 20,0 %	+/- 20,0 %	+/- 20,0 %
Current consumption	$\Delta p = 0$	I	8 mA	9 mA	10 mA
Tolerance	U Contr. 0004		+/- 20,0 %	+/- 20,0 %	+/- 20,0 %
Speed	$\Delta p = 0$	n	0 1/min	0 1/min	0 1/min
Tolerance	U Contr. 0004				

*) Attention: Marked values are "FK" features

3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------

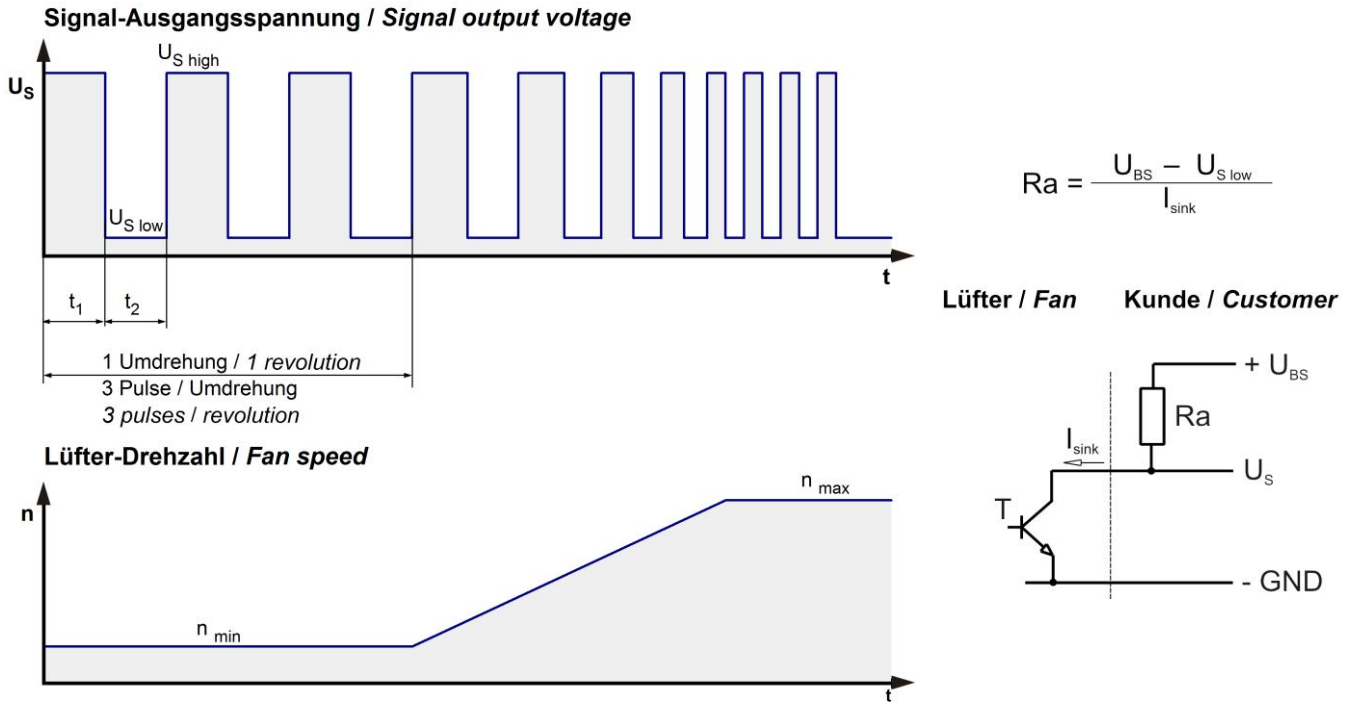

Features	Note	Values
Tacho operating voltage	U_{BS}	$\leq 60\text{ V}$
Tacho signal Low *)	$U_{S\ low}$	$\leq 0,4\text{ V}$
Tacho signal High *)	$U_{S\ high}$	$\leq 60\text{ V}$
Maximum sink current	I_{sink}	$\leq 20\text{ mA}$
Maximum source current		0 mA
External resistor	External resistor R_a from U_{BS} to U_S required. All voltages measured to GND.	
Tacho frequency *)	$(3 \times n) / 60$	$150\text{ Hz @ }3.000\text{ 1/min}$
Tacho isolated from motor	No	
Slew rate		$\geq 0,5\text{ V/us}$

Please note:

At zero speed the tacho signal is at a static HIGH. It will be also HIGH when the fan is still spinning, but the speed control signal is set to zero speed already.

The tacho signal is only activated after the start-up is completed.


n = revolutions per minute (1/min)

*) Attention: Marked values are "FK" features

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection Max. residual current at U_N	Rectifying diode $I_F \leq 5 \text{ mA}$	A
Locked rotor protection	Auto restart	A
Locked rotor current at U_N	I_{block} approx. 1.600 mA	
Clock signal at locked rotor	t_3/t_4 typical: 6,5 s / 10,0 s	
Extended Downtime	t_5 : 40 s after 4 start-up tests	
Internal fuse	Littelfuse NANO2 > Very Fast-Acting > 451/453 Series 3,5A / 125V (Art.No.: 045103.5MRL)	
Voltage control *)	Fan turns on at $U_B > 32 \text{ V}$ or $< 66 \text{ V}$ Fan turns off at $U_B < 30 \text{ V}$ or $> 68 \text{ V}$	

*) This fan has an undervoltage and overvoltage control circuit integrated which turns the motor off if the voltage is out of range.

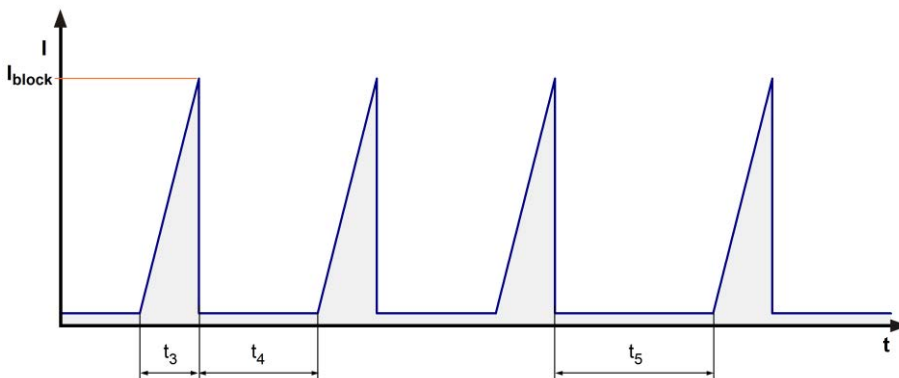

3.5 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.


Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;

In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a.) Operation condition:

3.000 1/min at free air flow	U Contr. 10 V		
Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$)	620 m ³ /h		<input type="text"/>
Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$)	440 Pa		<input type="text"/>

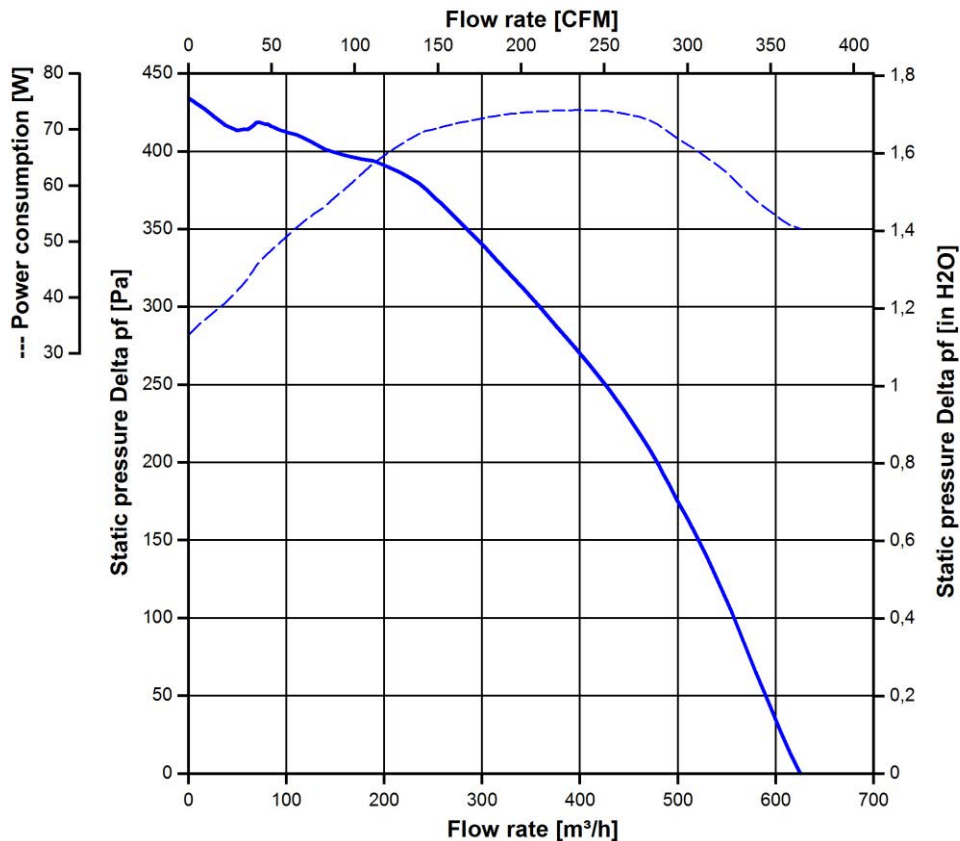

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianechoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

3.000 1/min at free air flow	U Contr. 10 V		
------------------------------	---------------	--	--

Optimal operating point	480 m ³ /h @ 200 Pa	
Sound power level at the optimal operating point	7,3 bel(A)	
Sound pressure level at free air flow, measured in rubber bands		

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	60 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Radiation exposure	None	
Dust requirements	None	
Salt fog requirements	None	
Harmful gas requirements	None	

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

4.3 Mechanical Requirements

Please require severity levels and specification parameters from the responsible development departments.

4.4 EMC

Kind	Conducted Emission; Voltage; 150 kHz-30 MHz
Accordinging	DIN EN 55032:2016-02
Check accuracy / Limit	Class B
Result	Exceed limit Class A

Kind	Radiated Emission; 30 MHz - 1000 MHz
Accordinging	DIN EN 55032:2016-02
Check accuracy / Limit	Class B
Result	Below limit Class B

Kind	Electrostatic Discharge Immunity Test
Accordinging	DIN EN 61000-4-2:2001-12
Check accuracy / Limit	Contact Discharge +/- 4 kV; Air Discharge +/- 8 kV
Result	A: The monitored function operates as designed during and after exposure to a disturbance.

Kind	Electromagnetic Field Immunity Test
Accordinging	DIN EN 61000-4-3:2006-12
Check accuracy / Limit	10 V/m; 80 - 1000 MHz; AM; m = 0,8; f = 1 kHz; 1%; t = 3 s
Result	A: The monitored function operates as designed during and after exposure to a disturbance.

Kind	Electrical Fast Transient / Burst Immunity Test
Accordinging	DIN EN 61000-4-4:2005-07
Check accuracy / Limit	+/- 2 kV on Power Lines; Coupling: POS, NEG, {PE}, ALL, 5 kHz and 100 kHz; 1 min
Result	A: The monitored function operates as designed during and after exposure to a disturbance.

Kind	Immunity to Conducted Disturbances, Induced by RF-Fields
Accordinging	DIN EN 61000-4-6:2001-12
Check accuracy / Limit	10 Vrms; 150 kHz - 80 MHz; AM; m = 0,8; f = 1 kHz; 1%; t = 3 s
Result	A: The monitored function operates as designed during and after exposure to a disturbance.

The information to the EMC corresponding only to a summary of a comprehensive test report.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 62368 and DIN EN 60335 A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 850 VDC / 1 Sec.	A
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 62368 - Audio/video, information and communication technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	85.000 h	
Life expectancy L10 at TU = 60 °C	52.500 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	142.500 h	



6.2 Additional Data

not specified

7 Information:

contact person

A/B-Projects:

project leader: Gutmann

mechanics:

electronics: Künstle

C-Projects:

applicator: -

Fan key data

Reference fan: 9595414741 (24V)

Integrated test software: yes EDM Dok: 7563387

Locked rotor test needed: NO

Quality of data:

- | | | |
|---------------------------------|----|----------|
| 1. First values RnD: | - | |
| 2. 10's Protokoll values: | ? | EDM Dok: |
| 3. Final PPAP Values (EHSxxxx): | NO | EDM Dok: |
| 4. Adjusted series values: | NO | EDM Dok: |

Änderungen/Changes:

17.10.2017 015/Gutmann:
Basis für die Spezifikation ist 9595414741 (Version 24V)
Betriebsdaten angepasst auf 48V.

27.10.2017 015Künstle
Elektrische Betriebsdaten gepflegt, LLM, Akustik, muss noch von Michael Hornig gepflegt werden, Lebensdauer fehlt noch,

10.11.2017 015Künstle
Lebensdauerwerte gepflegt.

26.01.2018 015Gutmann
Elektrische Betriebsdaten nach PPAP Dokument vom 25.01.18 angepasst.

06.07.2018 015/Künstle Werte für epGML gepflegt

13.05.25 014 Nocita: Spec updated, fan is unchanged !
Software update suggested for better test possibilites.