


AC centrifugal fan

forward-curved, single-intake
with housing (without flange)



RL59/2400-2112 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	RL59/2400-2112	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Speed	min ⁻¹	2400
Power consumption	W	6
Max. ambient temperature	°C	60
Air flow	m ³ /h	20
Pressure increase	Pa	63

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, single-intake
with housing (without flange)


Technical description

Weight	0.30 kg
Impeller material	PA6 GF plastic
Housing material	PA6 GF plastic
Insulation class	"B"
Cable	Flat plug 2.8 x 0.5

AC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Product drawing

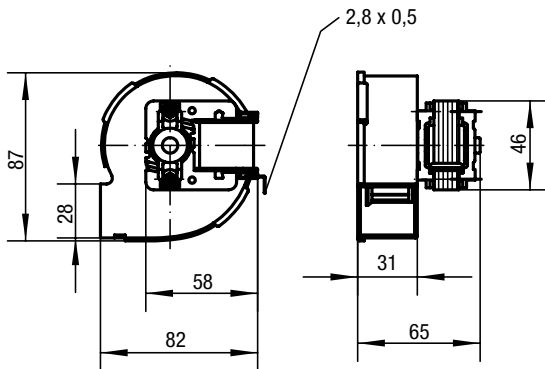

AC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Curves: Air performance

