

RLD76/8600Z-3030L

AC centrifugal fan

forward curved, dual inlet
with housing (without flange)

RLD76/8600Z-3030L ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	RLD76/8600Z-3030L	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Speed	min ⁻¹	2150
Power input	W	58
Current draw	A	0.53
Max. ambient temperature	°C	60
Air flow	m ³ /h	210
Pressure increase	Pa	165

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC centrifugal fan

forward curved, dual inlet
with housing (without flange)


Technical features

Mass	1.5 kg
Material of impeller	Aluminum (Fire-aluminized sheet steel)
Housing material	Fire-aluminized sheet steel
Insulation class	"B"
Connection line	Flat plug 6.3x0.8

AC centrifugal fan

forward curved, dual inlet
with housing (without flange)


Product drawing

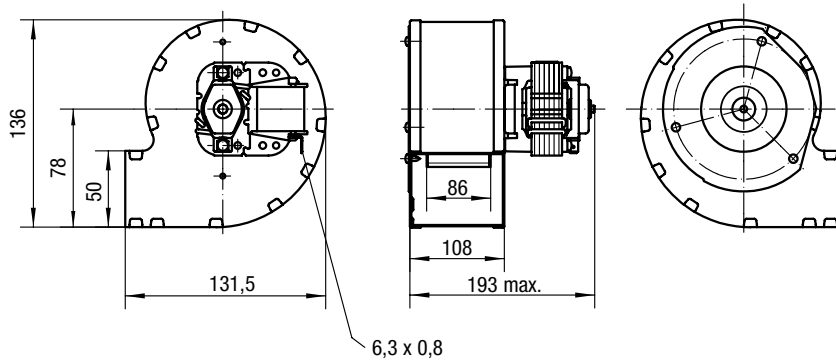

AC centrifugal fan

forward curved, dual inlet
with housing (without flange)

Charts: Air flow

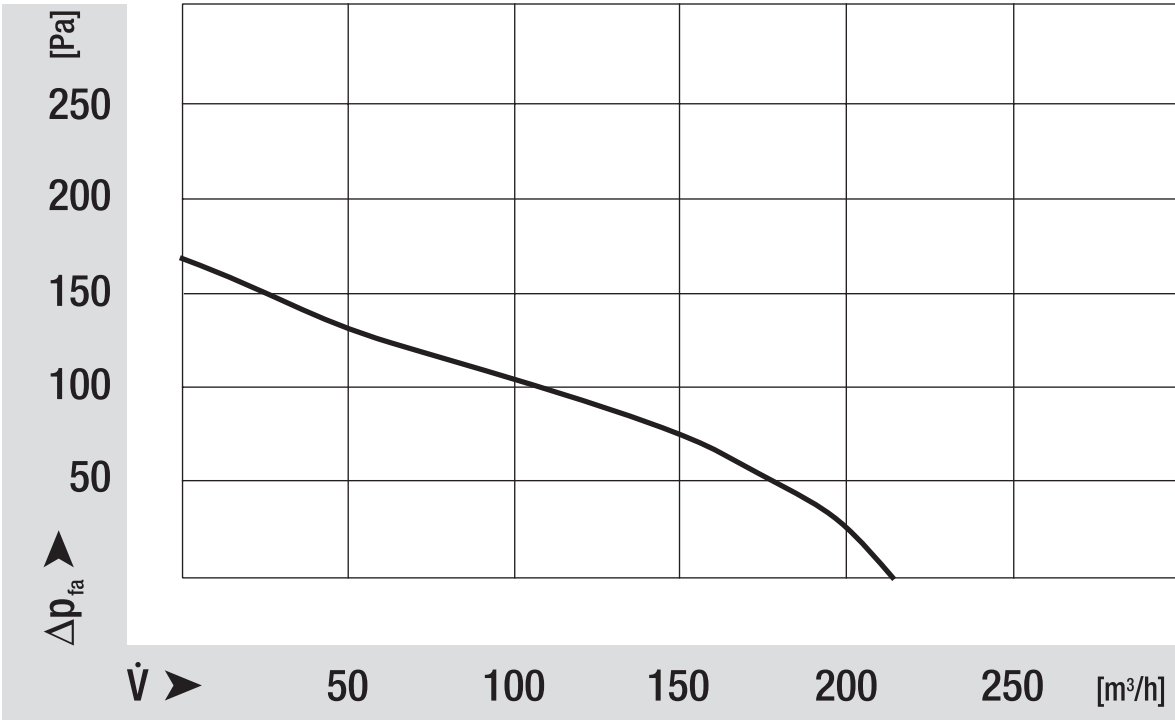

AC centrifugal fan

forward curved, dual inlet
with housing (without flange)

Charts: Speed

