

Product Data Sheet **8315100100**
VCS0045XUGAS
RVE45-3/54/2P

ebmpapst

engineering a better life



RVE45-3/54/2P

INDEX

1 General 3

2 Mechanics 3

2.1 General 3

2.2 Connections 3

3 Operating Data 5

3.1 Electrical Interface - Input 5

3.2 Electrical Operating Data 6

3.3 Electrical Interface - Output 7

3.4 Electrical Features 8

3.5 Aerodynamics 9

3.6 Sound Data 10

4 Environment 10

4.1 General 10

4.2 Climatic Requirements 10

4.3 EMC 10

5 Safety 12

5.1 Electrical Safety 12

5.2 Approval Tests 12

6 Reliability 12

6.1 General 12

1 General


| | | |
|-------------------------------------|-------------------------------------|--|
| Fan type | Blower | |
| Rotating direction looking at rotor | Counterclockwise | |
| Airflow direction | Axial: intake; centrifugal: exhaust | |
| Bearing system | Ball bearing | |
| Mounting position - shaft | Any | |

2 Mechanics**2.1 General**

| | | |
|-------------------|--|--|
| Width | 64,6 mm | |
| Height | 64,5 mm | |
| Depth | 65,5 mm | |
| Diameter | 57 mm | |
| Mass | 0,16 kg | |
| Housing material | FDA approved plastics for the air-conducting parts (top and bottom housing) and V0 for the motor and electronics cover | |
| Impeller material | FDA approved plastics | |

2.2 Connections

| | | |
|-----------------------|------------|--|
| Electrical connection | Wires | |
| Lead wire length | L = 365 mm | |
| Tolerance | + - 10 mm | |
| Wire size (AWG) | 22 | |
| Insulation diameter | 1,7 mm | |

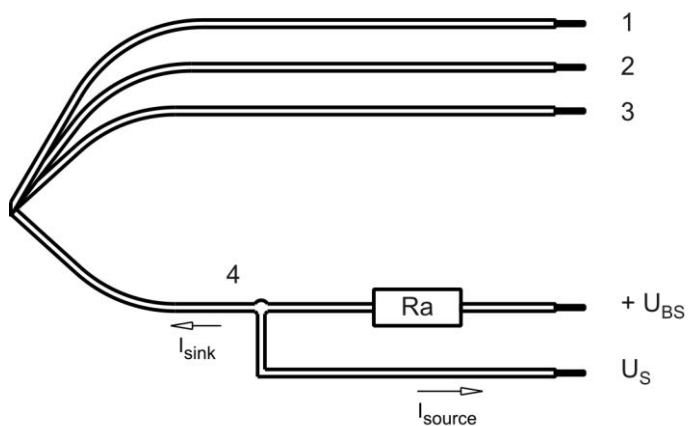

| Wire | Color | Operation | Wire size | Insulation diameter |
|------|--------|-----------|-----------|---------------------|
| 1 | red | + UB | AWG 22 | 1,7 mm |
| 2 | blue | - GND | AWG 22 | 1,7 mm |
| 3 | violet | PWM | AWG 22 | 1,7 mm |
| 4 | white | Tacho | AWG 22 | 1,7 mm |



3 Operating Data

3.1 Electrical Interface - Input

| | |
|---------------|-----|
| Control input | PWM |
|---------------|-----|

Features

| | | |
|-----------------|----------------|----------------------------------|
| Input type | Open collector | |
| PWM - Frequency | | 1 kHz - 10 kHz typical: 2 kHz |

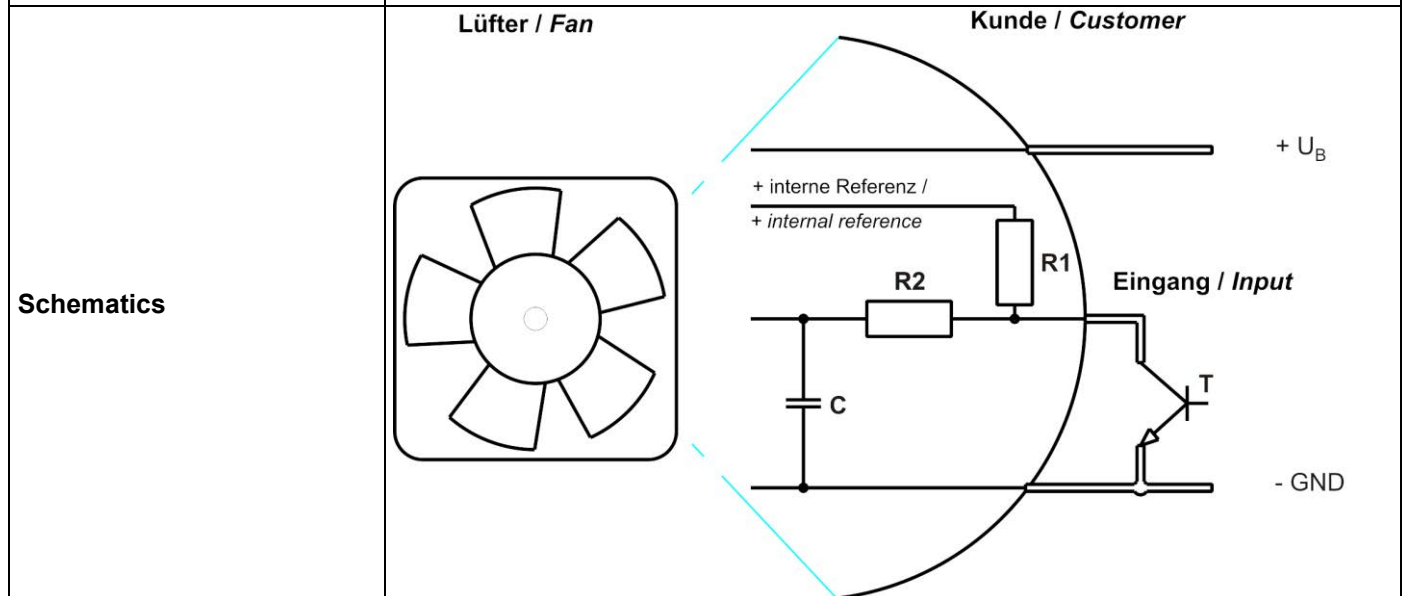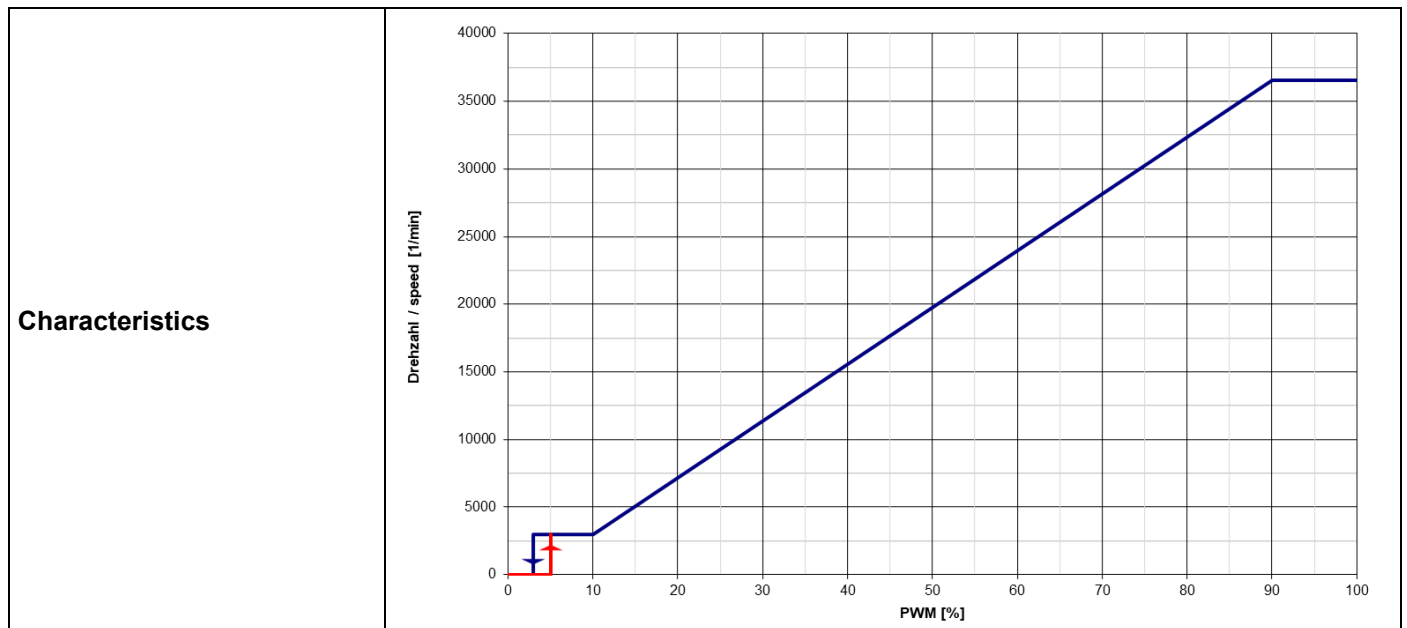

R1=3k3
internal reference voltage: 3,3V

Information to the curve:

- 0 - 5%: 0 1/min (corresponding to minimum speed or power)
- 5 - 10%: 3000 1/min (corresponding to minimum speed)
- 10 - 90%: linearly increasing curve (coming from 0%)
- 90 - 100%: 36.500 1/min (corresponding to maximum speed)
- 100 - 3%: 3000 1/min (corresponding to minimum speed, coming from 100%)
- 3 - 0%: 0 1/min (corresponding to minimum speed or power)

If the setpoint is set to 0%, the fan brakes from < 20,000 rpm.
 The fan speed is set (open loop) and not regulated (closed loop). The speed depends on the operating voltage and the operating point. The maximum speed is limited to 46,000 rpm.

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes. In the intake and outlet area should not be any solid obstruction within 0,5 m.


- $\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)
- l: corresp. to arithm. mean current value

| Name | Condition |
|----------|----------------------|
| PWM 0001 | PWM: 100 %; f: 2 kHz |

| Features | Condition | Symbol | Values | | |
|------------------------------|----------------|----------------|--------------|--------------|--------------|
| Voltage range | | U | 16 V | | 30 V |
| Nominal voltage | | U _N | | 24 V | |
| Power consumption | $\Delta p = 0$ | P | 16 W | 36 W | 37 W |
| Tolerance | PWM 0010 | | +/- 10 % | +/- 5 % | +/- 5 % |
| Current consumption | $\Delta p = 0$ | I | 1.000 mA | 1.500 mA | 1.250 mA |
| Tolerance | PWM 0010 | | +/- 10 % | +/- 5 % | +/- 5 % |
| Speed | $\Delta p = 0$ | n | 27.500 1/min | 36.500 1/min | 37.000 1/min |
| Tolerance | PWM 0010 | | +/- 10 % | +/- 5 % | +/- 5 % |
| Starting current consumption | | | | <= 3.000 mA | |


3.3 Electrical Interface - Output

| | |
|------------|---------------------|
| Tacho type | /2 (open collector) |
|------------|---------------------|

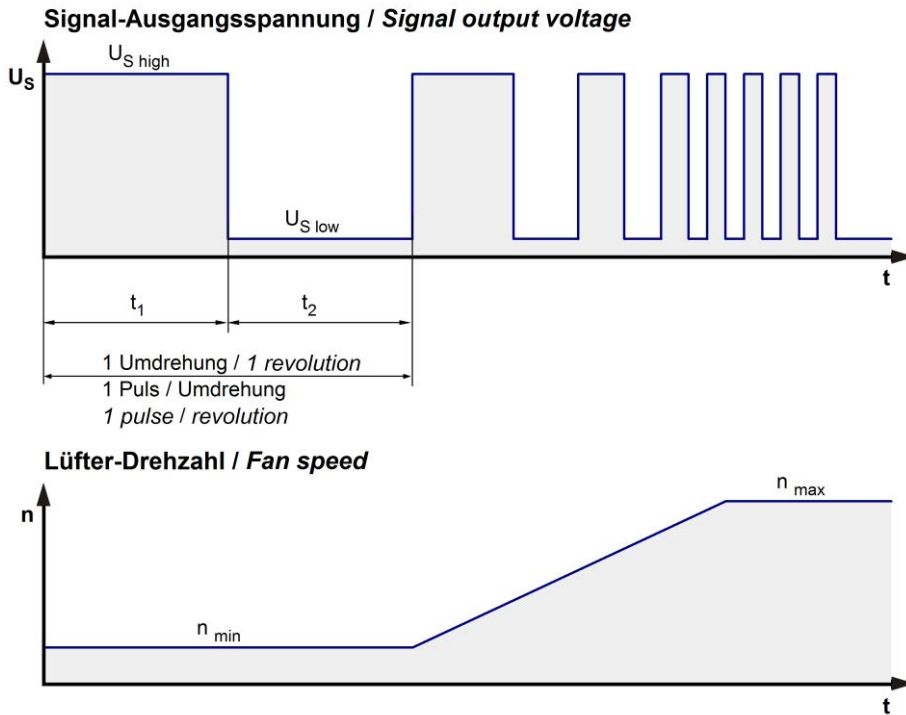

$$R_a = \frac{U_{BS} - U_{S\ low}}{I_{sink}}$$

Lüfter / Fan Kunde / Customer

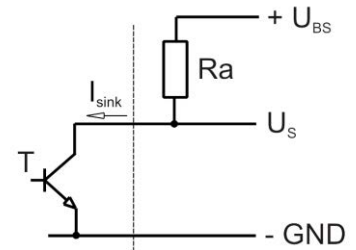


| Features | Note | Values |
|---------------------------|--|-------------------------------------|
| Tacho operating voltage | U_{BS} | $\leq 30\ V$ |
| Tacho signal Low | $U_{S\ low}$ | $I_{sink}: 2\ mA$ $\leq 0,4\ V$ |
| Tacho signal High | $U_{S\ high}$ | $I_{source}: 0\ mA$ $\leq 30\ V$ |
| Maximum sink current | I_{sink} | $\leq 4\ mA$ |
| Maximum source current | | $0\ mA$ |
| External resistor | External resistor R_a from U_{BS} to U_S required. All voltages measured to GND. | |
| Tacho frequency | $n / 60$ | $616\ Hz @ 37.000\ 1/min$ |
| Tacho isolated from motor | No | |
| Slew rate | | $\geq 0,5\ V/us$ |

n = revolutions per minute (1/min)

3.4 Electrical Features

| Electronic function | Open loop speed | |
|--------------------------------|---|--|
| Reversed polarity protection | N-CH FET | |
| Max. residual current at U_N | $I_F \leq 1 \text{ mA}$ | |
| Locked rotor protection | Auto restart | |
| Locked rotor current at U_N | I_{block} approx. 70 mA | |
| Clock signal at locked rotor | t_3 / t_4 typical: 0,22 s / 0,22 s | |
| Internal fuse | Littelfuse NANO2 > Very Fast-Acting > 451/453 Series 5A / 125V (Art.No.: 0451005.MRL) | |
| Voltage control *) | Fan turns on at $U_B > 15 \text{ V}$ or $< 31 \text{ V}$ Fan turns off at $U_B < 14 \text{ V}$ or $> 32 \text{ V}$ | |

*) This fan has an undervoltage and overvoltage control circuit integrated which turns the motor off if the voltage is out of range.

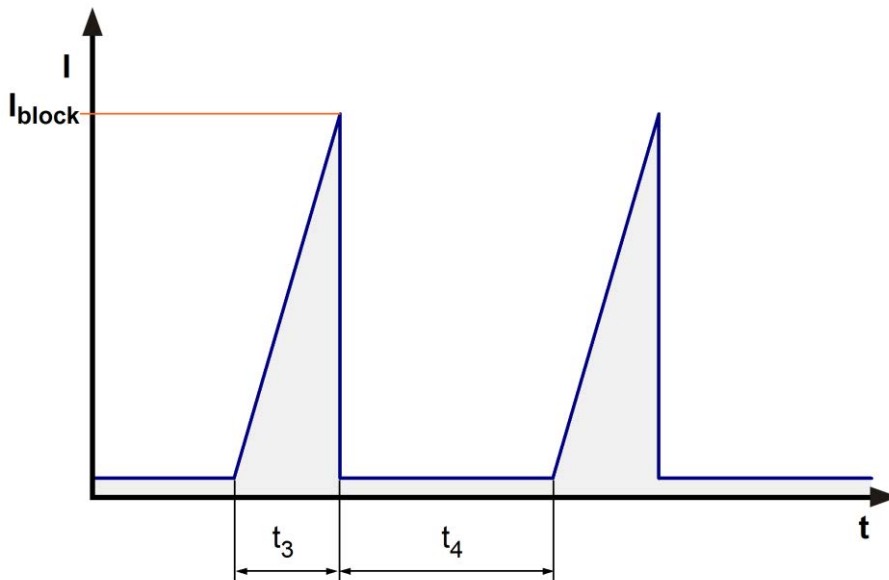

3.5 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.


The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a.) Operation condition:

| | | | |
|-------------------------------|---------------------|--|--|
| 36.500 1/min at free air flow | PWM 100 %; f: 2 kHz | | |
|-------------------------------|---------------------|--|--|

| | | |
|---|----------------------|--|
| Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$) | 30 m ³ /h | |
| Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$) | 4.850 Pa | |

The fan must not be operated at < 1m³ / h.

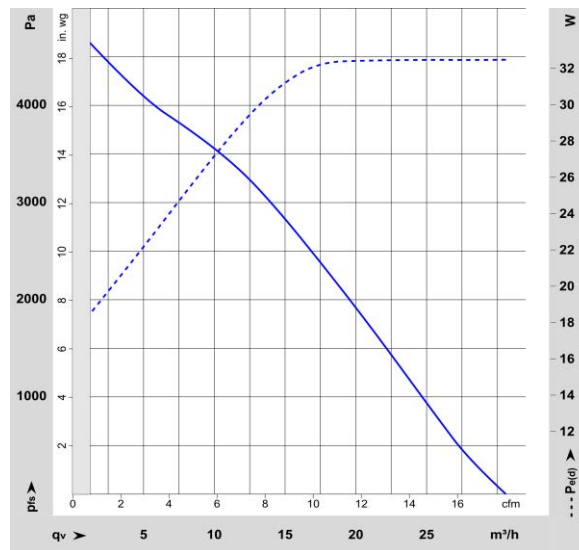

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
Sound power level: According to ISO 10302-1
Measured in a semianechoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

| | | | |
|-------------------------------|---------------------|--|--|
| 36.500 1/min at free air flow | PWM 100 %; f: 2 kHz | | |
|-------------------------------|---------------------|--|--|

| | | | |
|---|---------------------------------|--|--|
| Optimal operating point | 15 m ³ /h @ 2.810 Pa | | |
| Sound power level at the optimal operating point | 7,5 bel(A) | | |
| Sound pressure level at free air flow, measured in rubber bands | | | |

4 Environment

4.1 General

| | | | |
|--|--------|--|--|
| Min. permitted ambient temperature TU min. | -20 °C | | |
| Max. permitted ambient temperature TU max. | 65 °C | | |
| Min. permitted storage temperature TL min. | -40 °C | | |
| Max. permitted storage temperature TL max. | 85 °C | | |

4.2 Climatic Requirements

| | | | |
|-----------------------|---|--|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days | | |
| Water exposure | None | | |
| Dust requirements | None | | |
| Salt fog requirements | None | | |

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments.

4.3 EMC

| | |
|------------------------|--|
| Kind | Electrostatic Discharge Immunity Test |
| According | DIN EN 61000-4-2:2001-12 |
| Check accuracy / Limit | Contact Discharge +/- 4 kV; Air Discharge +/- 8 kV |
| Result | A: The monitored function operates as designed during and after exposure to a disturbance. |

| Kind | Electromagnetic Field Immunity Test |
|------------------------|--|
| According | DIN EN 61000-4-3:2006-12 |
| Check accuracy / Limit | 10 V/m; 80 - 1000 MHz; AM; m = 0,8; f = 1 kHz; 1%; t = 3 s |
| Result | A: The monitored function operates as designed during and after exposure to a disturbance. |

| Kind | Electrical Fast Transient / Burst Immunity Test |
|------------------------|--|
| According | DIN EN 61000-4-4:2005-07 |
| Check accuracy / Limit | +/- 2 kV on Power Lines; Coupling: POS, NEG, {PE}, ALL, 5 kHz and 100 kHz; 1 min |
| Result | A: The monitored function operates as designed during and after exposure to a disturbance. |

| Kind | Immunity to Conducted Disturbances, Induced by RF-Fields |
|------------------------|--|
| According | DIN EN 61000-4-6:2001-12 |
| Check accuracy / Limit | 10 Vrms; 150 kHz - 80 MHz; AM; m = 0,8; f = 1 kHz; 1%; t = 3 s |
| Result | A: The monitored function operates as designed during and after exposure to a disturbance. |

5 Safety**5.1 Electrical Safety**

| | | |
|---|--|--|
| Dielectric strength DIN EN 62368 and DIN EN 60335 A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground. | 500 VAC / 1 Min. 850 VDC / 1 Sec. | |
| Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min. | RI > 10 MOhm | |
| Clearance / creepage distance | 1,0 mm / 1,2 mm | |
| Protection class | III | |


5.2 Approval Tests

| | | |
|-----|---|---|
| CE | EC Declaration of Conformity | Yes |
| EAC | Eurasian Conformity | Yes |
| UL | Underwriters Laboratories | Yes / UL507, Electric Fans E38324 |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 62368 - Audio/video, information and communication technology equipment |
| CSA | Canadian Standards Association | Yes / CSA audited by UL according to C22.2 No. 113 Fans and Ventilators |
| CCC | China Compulsory Certification | Not applicable |

6 Reliability**6.1 General**

| | | |
|--|----------|--|
| Life expectancy L10 at TU = 40 °C | 17.500 h | |
| Life expectancy L10 at TU max. | 8.500 h | |
| Life expectancy L10 acc. to IPC 9591 at TU = 40 °C | 27.500 h | |
| Life expectancy L10 acc. to IPC 9591 at TU = 25 °C | 45.000 h | |

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. Refer to protection notice ISO 16016! Note: in case of multilingual information in this document and in the applicable documents referred to in this document, only the English version shall be authoritative and legally binding in the event of contradictions in content.

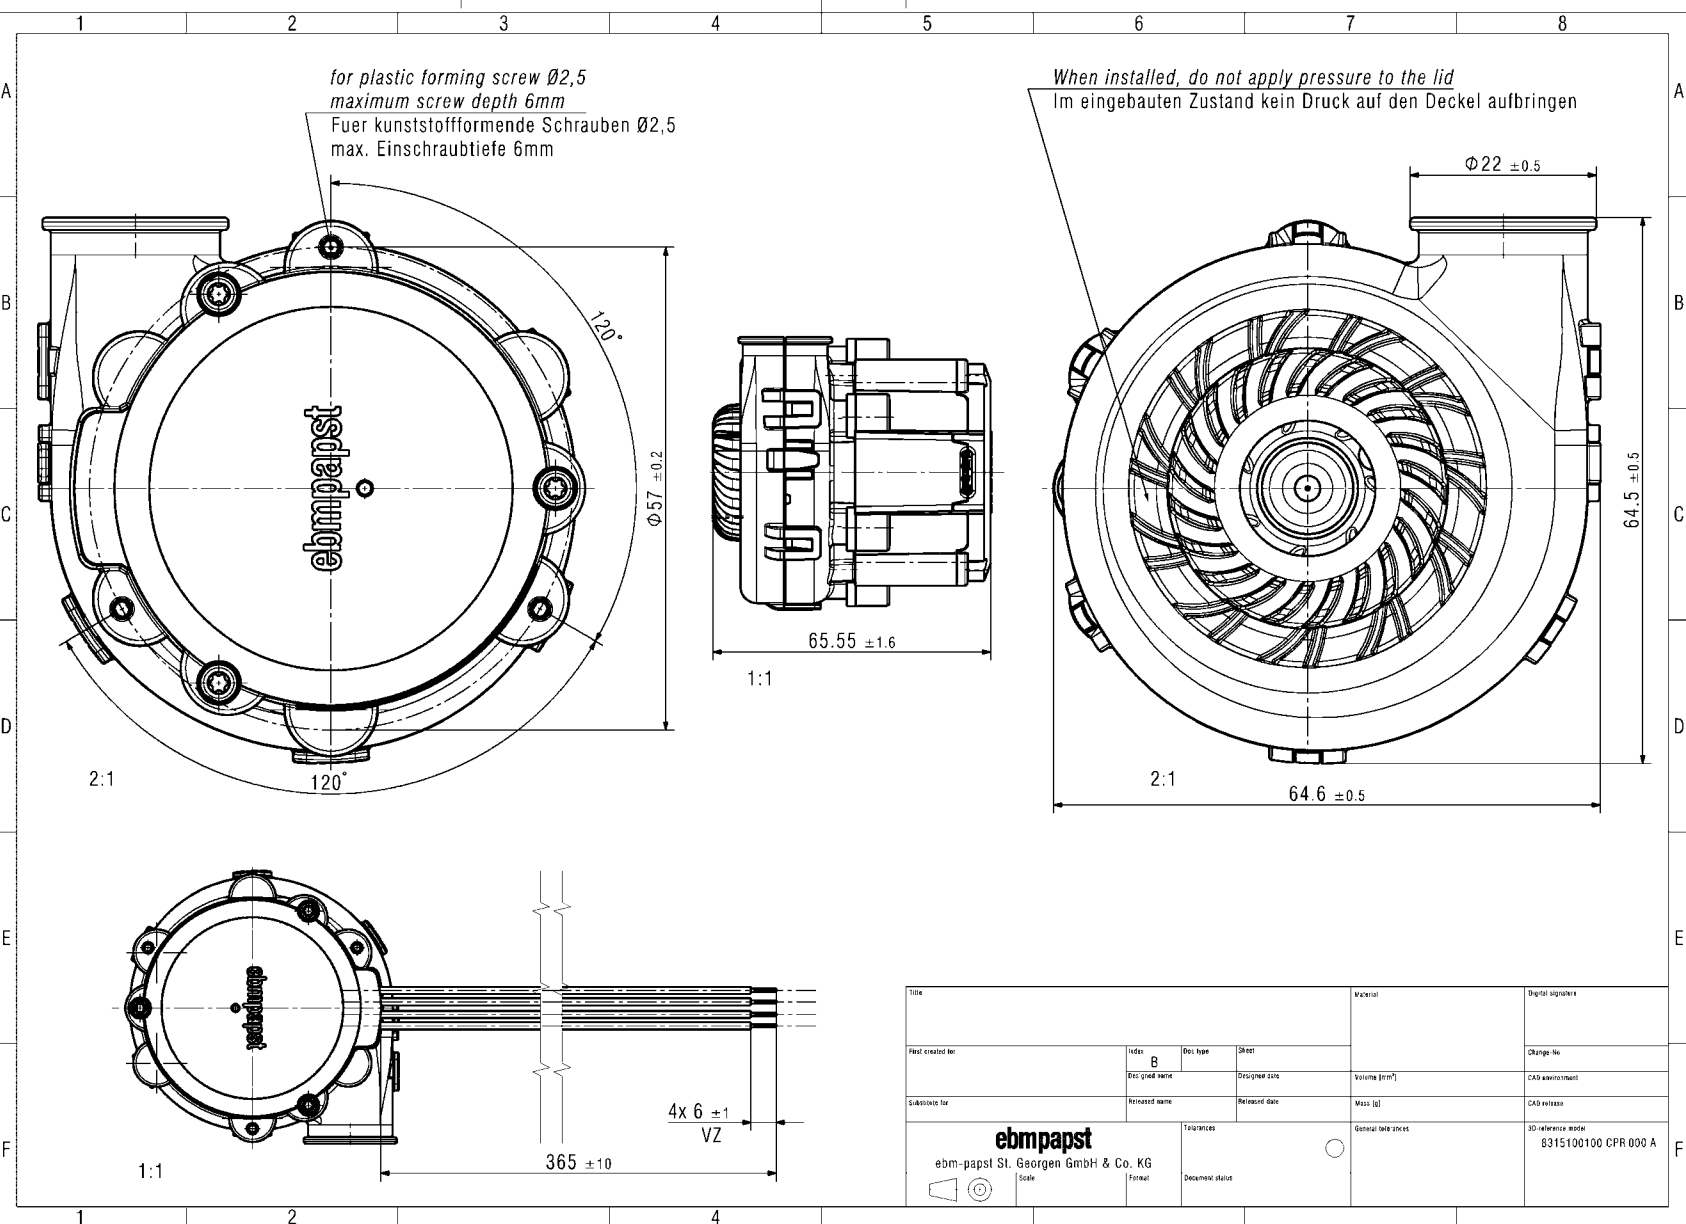

| | | | | | | | |
|---|--|----------------|---------------|---------------------------|--------------------|----------------------|--|
| Title | | | | Material | | Digital signature | |
| Part created for | | Index | Doc. type | Sheet | Change No. | | |
| | | B | | | CAD environment | | |
| Substrate for | | Doc. grid name | Design lead | Volume [l] | CAD release | | |
| | | Released name | Released date | Mass [g] | 3D-reference model | | |
| | | Tolerances | | General safe zones | | 8315100100 CPR 000 A | |
| ebmpapst ebm-papst St. Georgen GmbH & Co. KG Scale | | | | Format Document status | | | |