

S1G200-CA95-02

EC axial panel fan - ESM

sickle-shaped blades (S series)

ESM guard grille



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	S1G200-CA95-02		
Motor	M1G055-BD		
Phase		1~	1~
Nominal voltage	VAC	115	115
Frequency	Hz	50/60	50/60
Method of obtaining data		ml	
Speed (rpm)	min ⁻¹	2000	1500
Power consumption	W	31	
Current draw	A	0.43	
Max. back pressure	Pa	45	
Max. back pressure	in. wg	0.18	
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change


Technical description

Weight	1 kg
Size	200 mm
Motor size	55
Blade material	PA plastic
Guard grille material	PP plastic
Number of blades	5
Airflow direction	A
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Speed setting input - ESM+ expandable with plug-in module - Soft start - Thermal overload protection for motor
Speed levels	2
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 0.25 mA
Motor protection	Thermal switch auto reset, internally connected
With cable	Lateral
Protection class assignment	II; This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection. If there is a PE connection point on the housing, it must not be visible after installation.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.
Approval	VDE; CSA C22.2 No. 77; EAC; UL 1004-3

EC axial panel fan - ESM


sickle-shaped blades (S series)
ESM guard grille

Product drawing

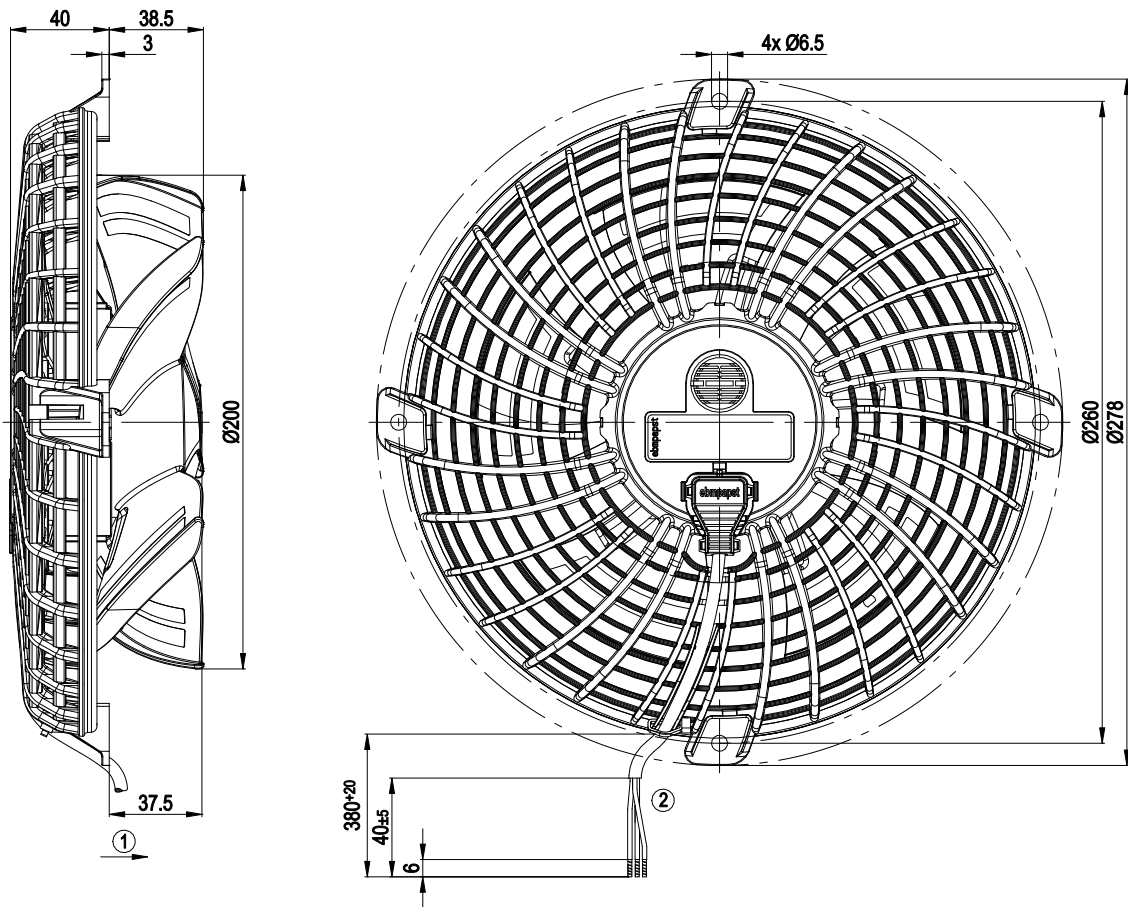

- 1 Direction of air flow "A"
- 2 Cable AWG20; 3x crimped splices

Connection diagram

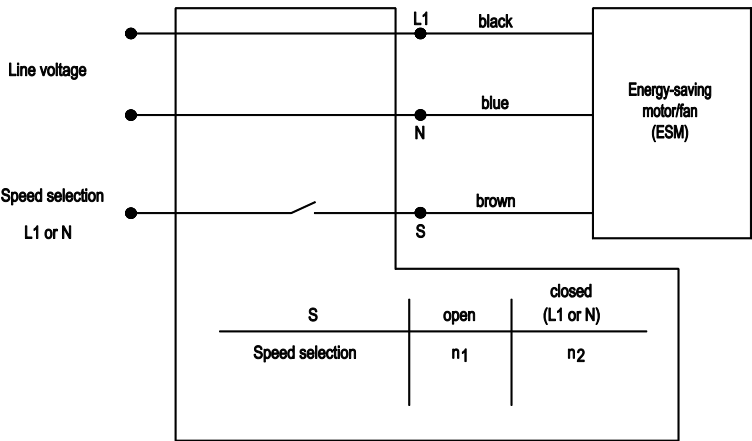


EC axial panel fan - ESM

sickle-shaped blades (S series)

ESM guard grille

Curves: Air performance 50 Hz

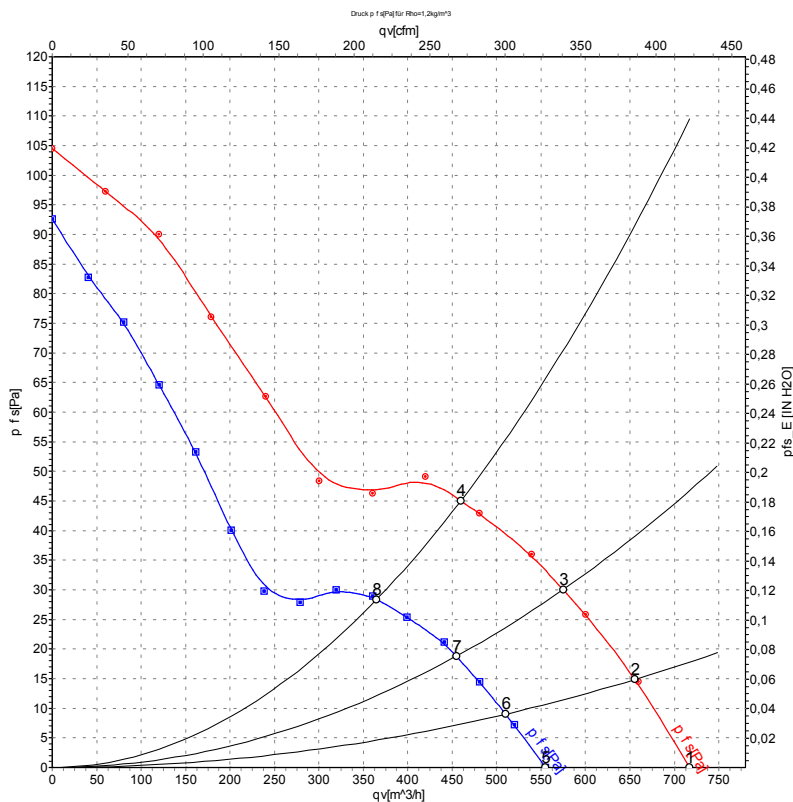

Measurement: LU-115293-1
Date: 2008-12-15

Measurement: LU-115298-1
Date: 2008-12-15

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{ts}	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	115	50	2000	30	0.43	715	0	420	0.00
2	115	50	2000	30	0.43	655	15	385	0.06
3	115	50	2000	30	0.43	575	30	340	0.12
4	115	50	2000	31	0.43	460	45	270	0.18
5	115	50	1500	17	0.28	555	0	325	0.00
6	115	50	1500	18	0.28	510	9	300	0.04
7	115	50	1500	19	0.28	455	19	270	0.08
8	115	50	1500	20	0.28	365	28	215	0.11

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase