

EC axial fan

sickled blades (S series)

S1G305-DA02-08 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S1G305-DA02-08	
Motor	M1G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	100 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	1050
Power input	W	19
Current draw	A	0.19
Max. back pressure	Pa	30
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



EC axial fan


sickled blades (S series)

Technical features

Mass	1.7 kg
Size	305 mm
Surface of rotor	Thick layer passivated
Material of blades	PP plastic
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+ 70 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing with anti-freezing grease
Technical features	- Motor current limit - Soft start - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Locked-rotor protection
Cable exit	Variable
Protection class	II
Approval	C22.2 Nr.77 + CAN/CSA-E60730-1; UL 1004-7 + 60730




Product drawing

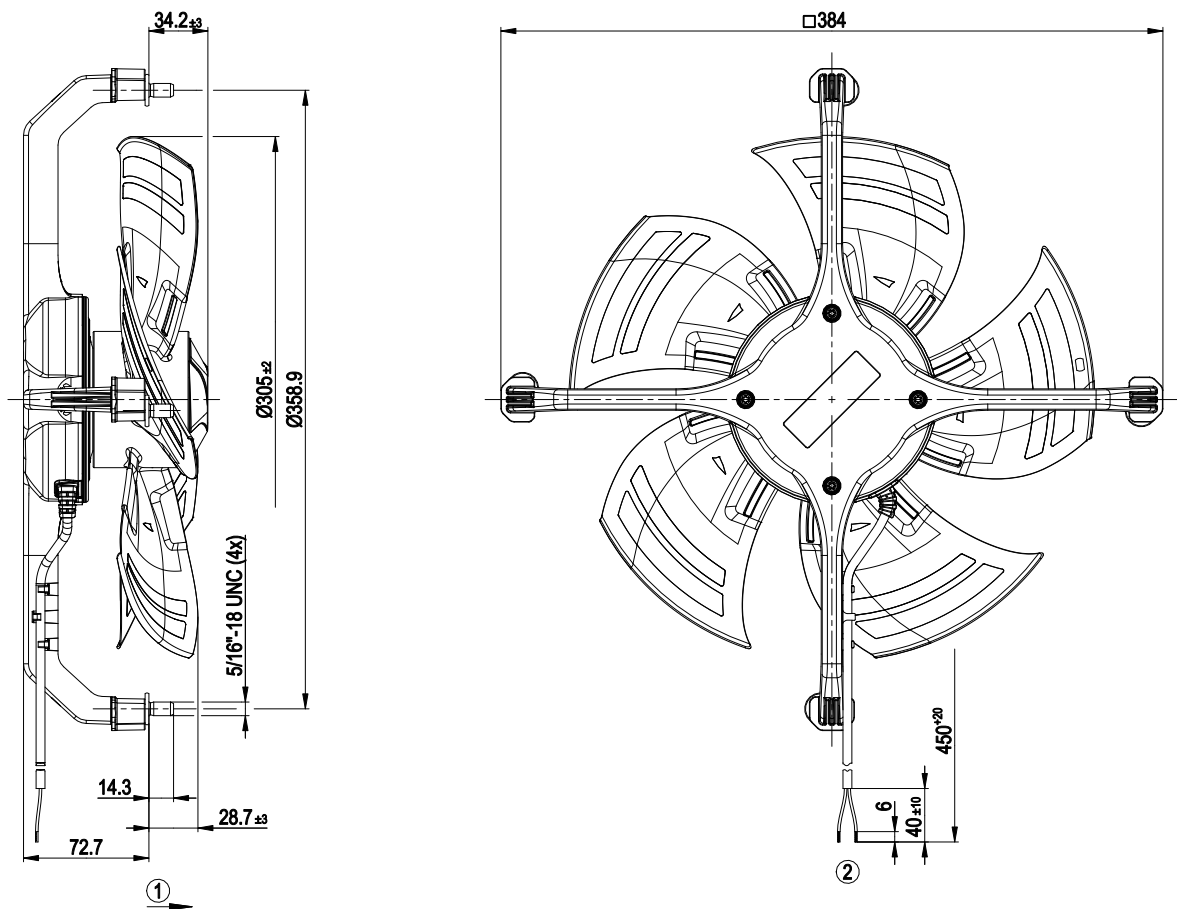


- | | |
|---|---|
| 1 | Direction of air flow "A" |
| 2 | Connection line PVC AWG18, 2x lead tips crimped |

Connection screen

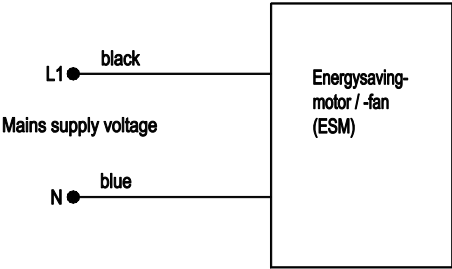

EC axial fan
sickled blades (S series)

Charts: Air flow 50 Hz

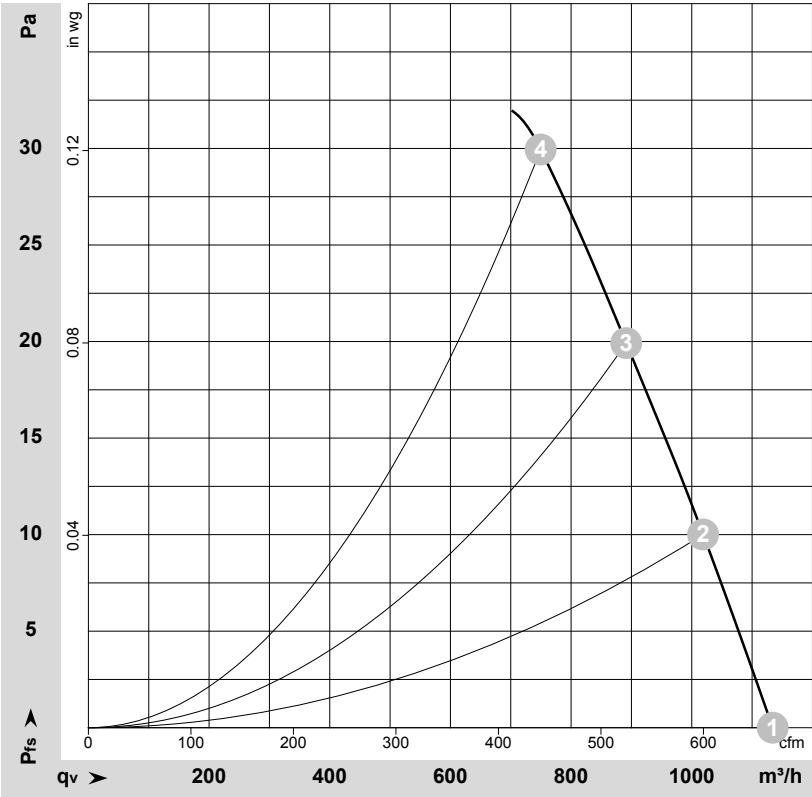

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-177379-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH2O
1	230	50	1050	12	0.14	47	55	1135	0	665	0.00
2	230	50	1050	15	0.15	46	54	1020	10	600	0.04
3	230	50	1050	17	0.17	45	53	890	20	525	0.08
4	230	50	1050	19	0.19	45	53	750	30	440	0.12

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase

