

EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle, Automotive

S1G315-AJ91-12 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	S1G315-AJ91-12	
Motor	M1G074-CF	
Nominal voltage	VDC	24
Nominal voltage range	VDC	16 .. 28
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	1800
Power consumption	W	150
Current draw	A	6.2
Max. back pressure	Pa	110
Max. back pressure	in. wg	0.44
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle, Automotive

Technical description

Weight	2.9 kg
Size	315 mm
Motor size	74
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted black
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	Motor IP20, electronics IP69
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H4
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Overvoltage detection - Thermal overload protection for electronics - Reverse polarity protection
Electrical hookup	Terminal box
With cable	Variable




EC axial fan

sickle-shaped blades (S series)

with guard grille for short nozzle, Automotive

Product drawing

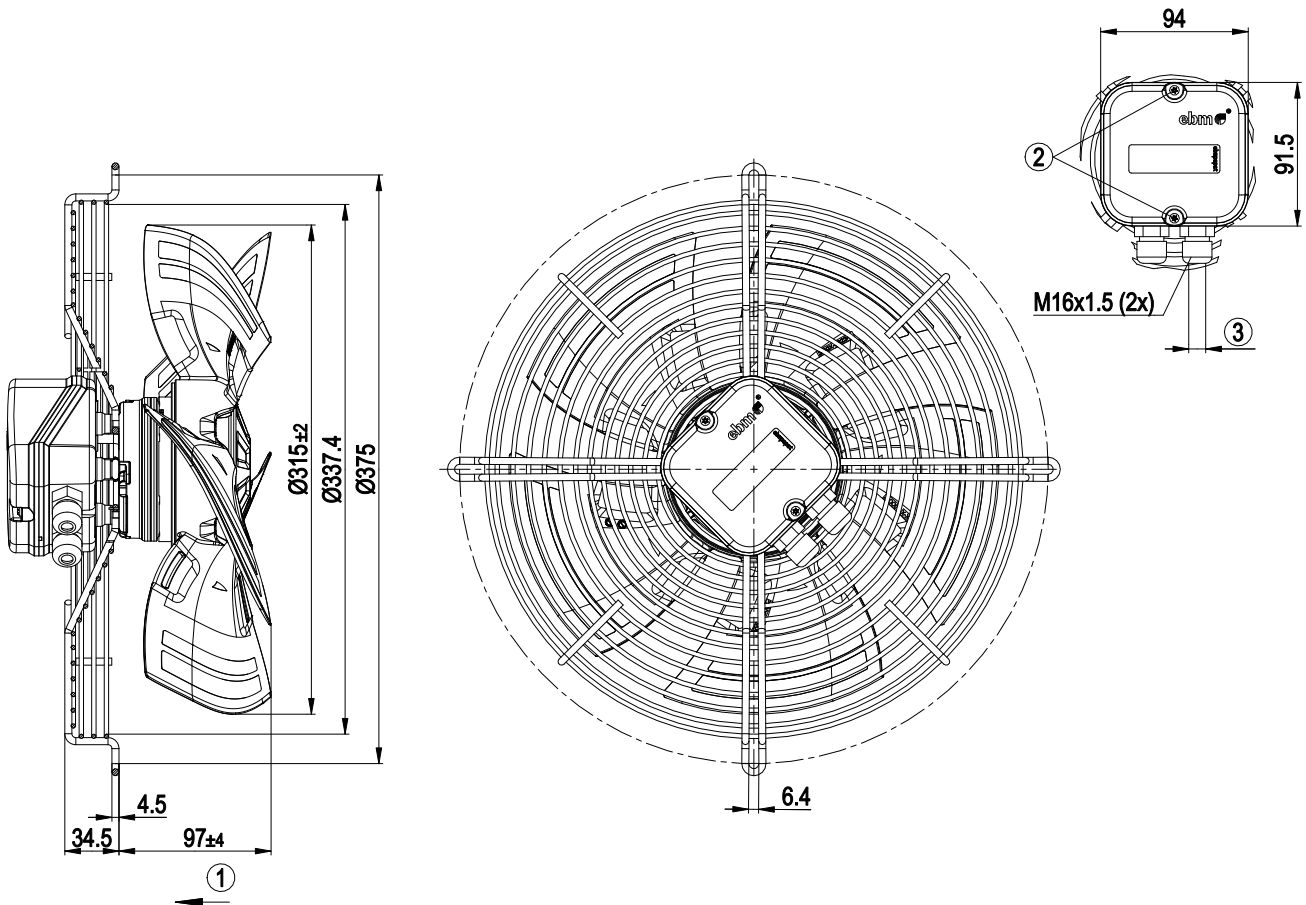


1	Airflow direction "V"
2	Tightening torque 0.5 ± 0.1 Nm
3	Cable diameter max. 7.5 mm, tightening torque 1.3 ± 0.2 Nm

EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle, Automotive


Connection diagram

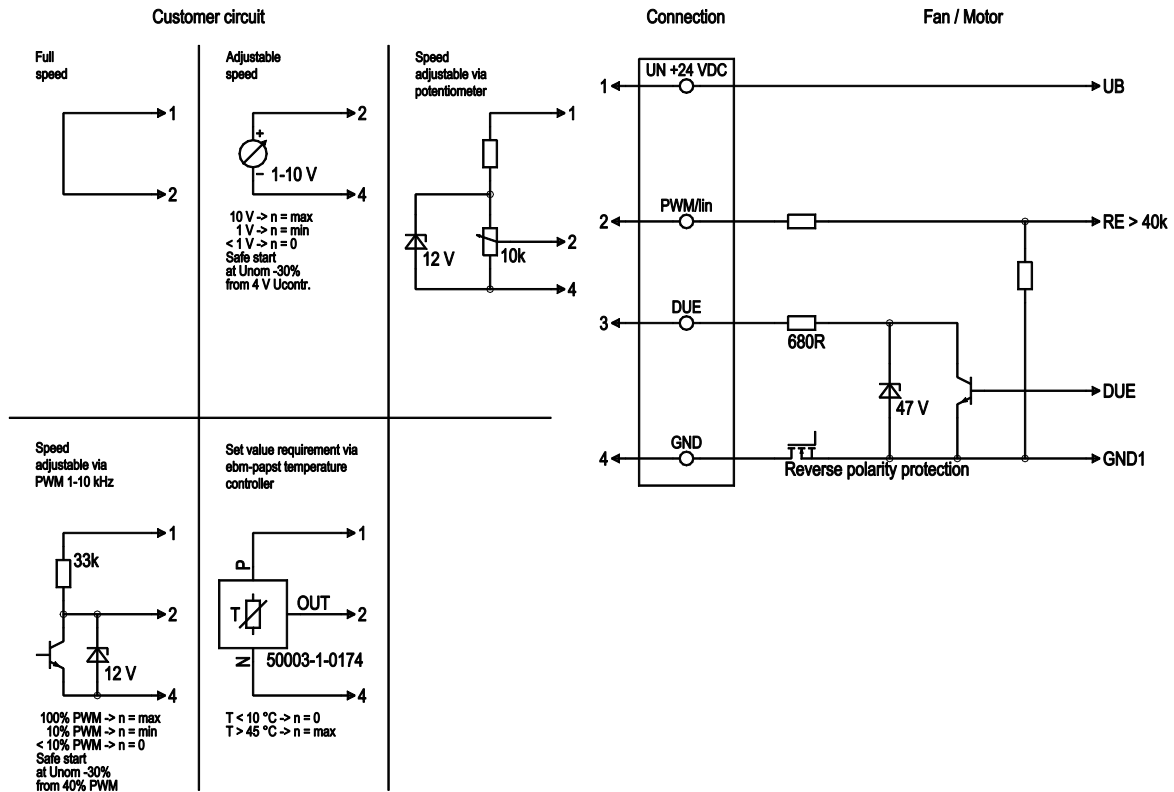

No.	Conn.	Designation	Color	Function/assignment
	1	UN +24 VDC	red	Power supply 24 VDC, maximum ripple 3.5%
	2	PWM/LIN	yellow	Control input Re > 40k
	3	DUE	white	Tach output, 3 pulses per revolution, Isink max = 10 mA
	4	GND	blue	Reference ground



Curves: Air performance

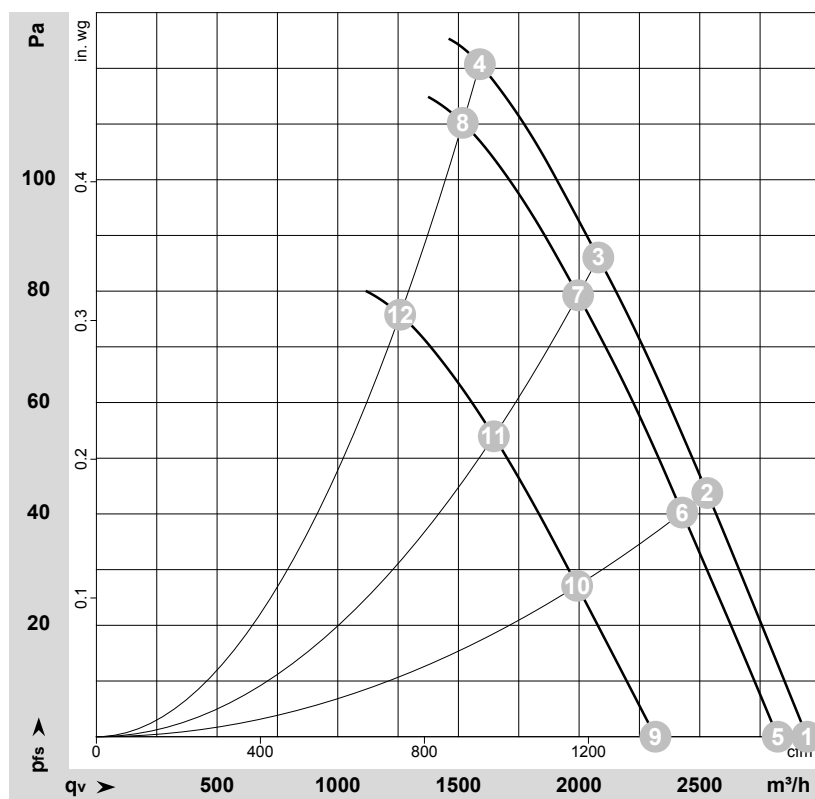

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-192611-1
 Measurement: LU-192492-1
 Measurement: LU-192615-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	28	1835	165	5.90	2945	0	1735	0.00
2	28	1775	169	6.05	2530	44	1490	0.18
3	28	1735	172	6.15	2080	86	1225	0.35
4	28	1700	174	6.23	1590	121	935	0.49
5	24	1800	150	6.20	2825	0	1660	0.00
6	24	1700	150	6.20	2425	40	1430	0.16
7	24	1660	150	6.27	1995	80	1175	0.32
8	24	1625	149	6.23	1520	110	895	0.44
9	16	1440	80	4.96	2315	0	1365	0.00
10	16	1400	83	5.16	1990	27	1170	0.11
11	16	1375	85	5.31	1645	54	970	0.22
12	16	1355	87	5.41	1260	77	740	0.31

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

