

# AC axial fan

sickled blades (S series)

with guard grille for full nozzle, for railway applications

S2D200-BH18-08 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

|                               |                   |      |      |
|-------------------------------|-------------------|------|------|
| Type                          | S2D200-BH18-08    |      |      |
| Motor                         | M2D068-BC         |      |      |
| Phase                         |                   | 3~   | 3~   |
| Nominal voltage               | VAC               | 400  | 400  |
| Connection                    |                   | Y    | Y    |
| Frequency                     | Hz                | 50   | 60   |
| Type of data definition       |                   | fa   | fa   |
| Valid for approval / standard |                   | CE   | CE   |
| Speed (rpm)                   | min <sup>-1</sup> | 2600 | 2900 |
| Power input                   | W                 | 68   | 70   |
| Current draw                  | A                 | 0.17 | 0.13 |
| Max. back pressure            | Pa                | 140  | 140  |
| Min. ambient temperature      | °C                | -25  | -25  |
| Max. ambient temperature      | °C                | 65   | 90   |
| Starting current              | A                 | 0.36 | 0.32 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



# AC axial fan

sickled blades (S series)

with guard grille for full nozzle, for railway applications

## Technical features


|                                                                    |                                                                 |
|--------------------------------------------------------------------|-----------------------------------------------------------------|
| Mass                                                               | 1.65 kg                                                         |
| Size                                                               | 200 mm                                                          |
| Surface of rotor                                                   | Coated in black                                                 |
| Material of blades                                                 | Sheet steel, coated in black                                    |
| Material of guard grille                                           | Steel, coated in black plastic (RAL9005)                        |
| Number of blades                                                   | 9                                                               |
| Direction of air flow                                              | "V"                                                             |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                                |
| Type of protection                                                 | IP 54; Depending on installation and position as per EN 60034-5 |
| Insulation class                                                   | "F"                                                             |
| Humidity (F)/environmental protection class (H)                    | F3-2                                                            |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                         |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                         |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request    |
| Condensate discharge holes                                         | None                                                            |
| Operation mode                                                     | S1                                                              |
| Motor bearing                                                      | Ball bearing                                                    |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA                                                       |
| Motor protection                                                   | Thermal overload protector (TOP) brought out, basic insulation  |
| Cable exit                                                         | Lateral                                                         |
| Protection class                                                   | I (if protective earth is connected by customer)                |
| Product conforming to standard                                     | EN 60335-1                                                      |
| Approval                                                           | CCC; EAC                                                        |



# AC axial fan

sickled blades (S series)  
with guard grille for full nozzle, for railway applications

## Product drawing

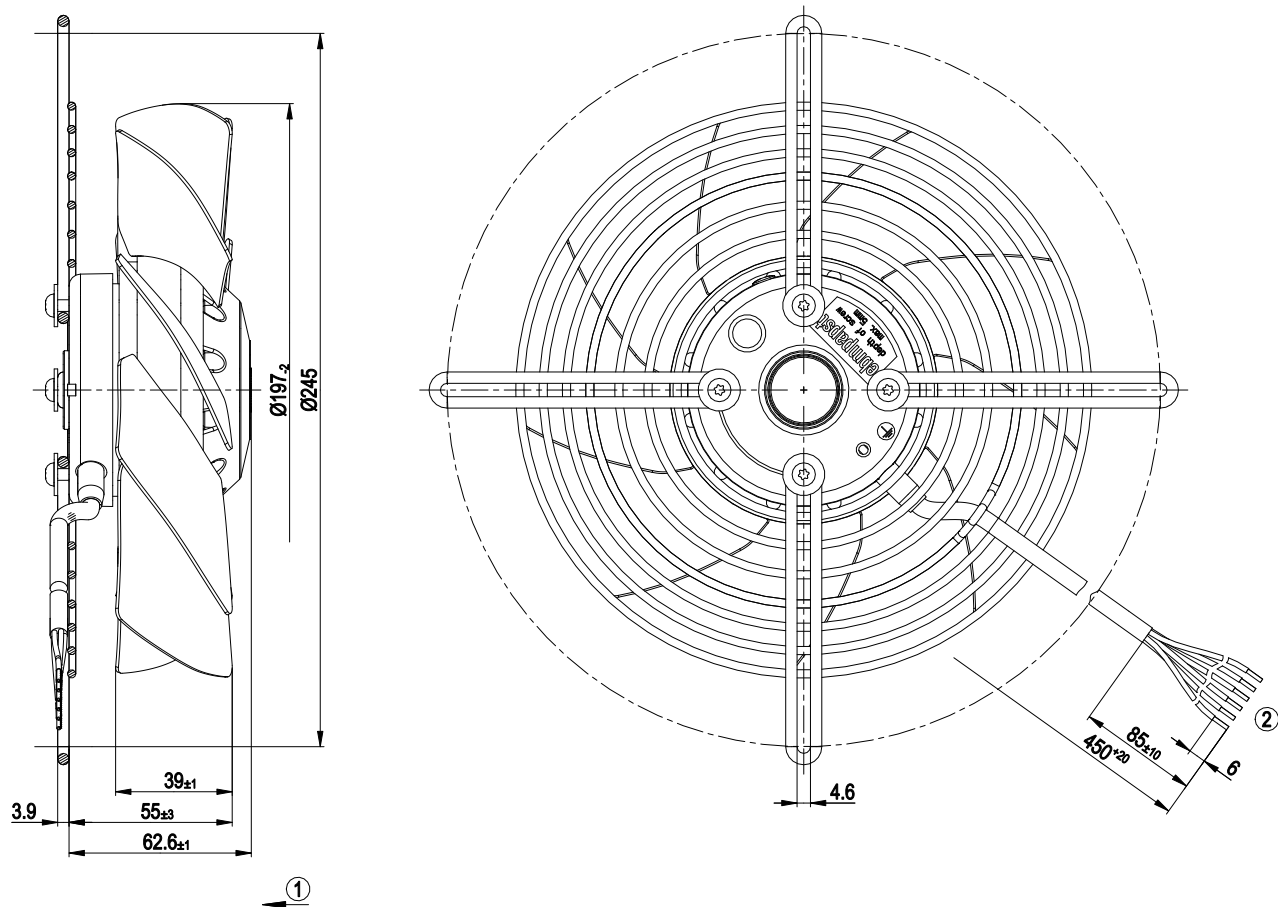

- |   |                                                              |
|---|--------------------------------------------------------------|
| 1 | Direction of air flow "V"                                    |
| 2 | Connection line XLPE / XLPO 6G 0.5 mm², 6x lead tips crimped |




AC axial fan

sickled blades (S series)

with guard grille for full nozzle, for railway applications

Connection screen

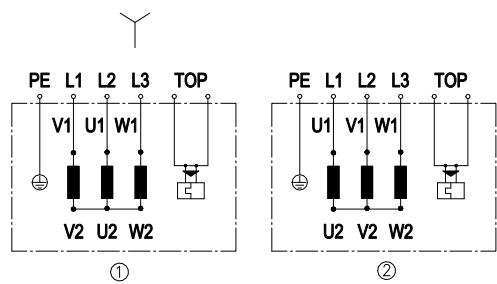

Change direction of rotation by reversing two phases


|     |                          |
|-----|--------------------------|
|     | Three-phase motor        |
| Y   | Star connection          |
| 1   | Anti-clockwise operation |
| L1  | = V1 = blue              |
| L2  | = U1 = black             |
| L3  | = W1 = brown             |
| 2   | Clockwise operation      |
| L1  | = U1 = black             |
| L2  | = V1 = blue              |
| L3  | = W1 = brown             |
| PE  | green/yellow             |
| TOP | 2x grey                  |



# AC axial fan

sickled blades (S series)  
with guard grille for full nozzle, for railway applications

## Charts: Air flow 50 Hz

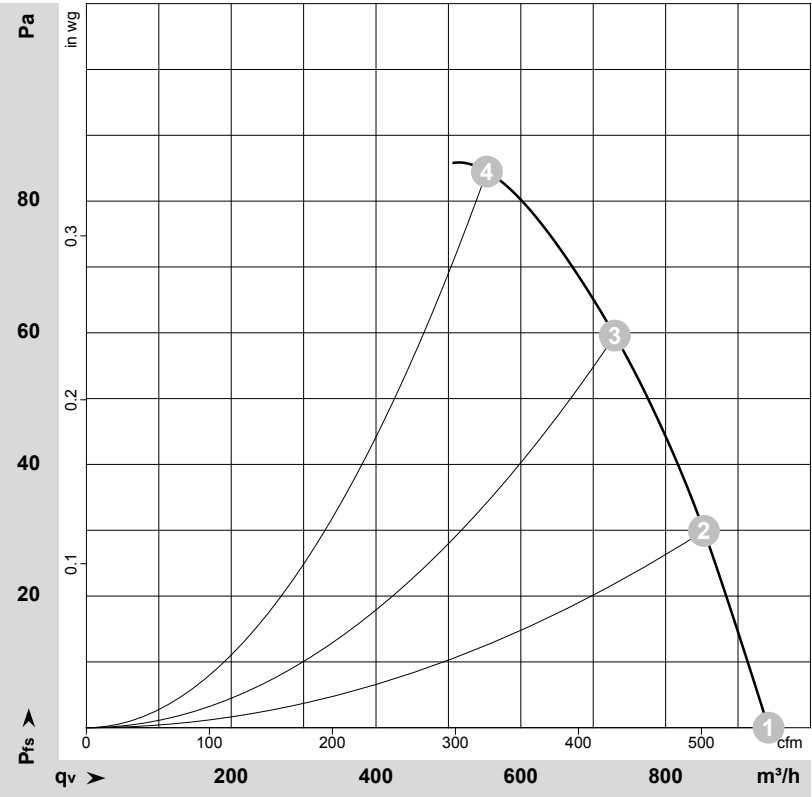

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-26980-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L<sub>WA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub> | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|----------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h           | Pa              | cfm            | inH2O           |
| 1 | Y     | 400 | 50 | 2600              | 68             | 0.17 | 940            | 0               | 555            | 0.00            |
| 2 | Y     | 400 | 50 | 2550              | 70             | 0.16 | 855            | 30              | 500            | 0.12            |
| 3 | Y     | 400 | 50 | 2500              | 73             | 0.16 | 730            | 60              | 430            | 0.24            |
| 4 | Y     | 400 | 50 | 2460              | 75             | 0.16 | 555            | 85              | 325            | 0.34            |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase




AC axial fan

sickled blades (S series)

with guard grille for full nozzle, for railway applications

Charts: Air flow 60 Hz

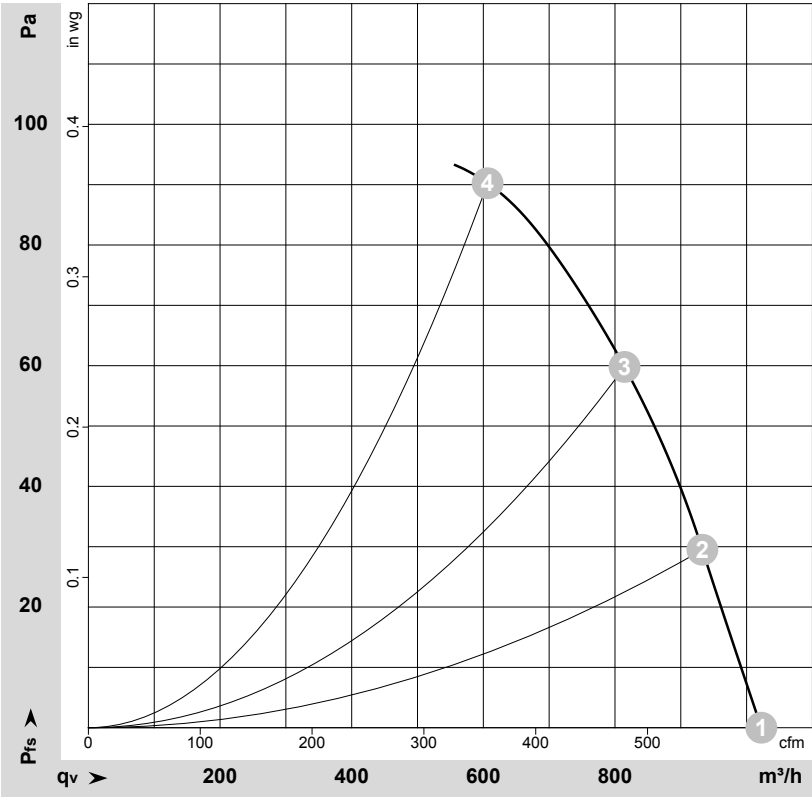

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-26981-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|----------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h           | Pa              | cfm            | inH2O           |
| 1 | Y     | 400 | 60 | 2900              | 70             | 0.13 | 1020           | 0               | 600            | 0.00            |
| 2 | Y     | 400 | 60 | 2745              | 73             | 0.14 | 935            | 30              | 550            | 0.12            |
| 3 | Y     | 400 | 60 | 2670              | 78             | 0.14 | 815            | 60              | 480            | 0.24            |
| 4 | Y     | 400 | 60 | 2590              | 82             | 0.15 | 605            | 90              | 355            | 0.36            |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

